# Chaos and bifurcations in continuous language-model feedback

Timothy D. Jones

Praxagent

Private working draft, 18 October 2026

**Status of this draft.** Unless marked otherwise, results on the soft-token map are numerically validated in float64 (rung 1 or 2 of the evidence ladder in Appendix L). Float32 maps are labeled as such. Huginn's spectra are float32 and its accuracy runs bfloat16. **[Planned:** Red] marks planned work and **[In progress:** orange] running work. The only computer-assisted proofs are those of the period-8 orbit of Table 6 and of the coexisting attracting period-2 and period-3 orbits at one parameter cell (rung 3, Appendix L).

**Abstract**

Fed back through its own soft next-token distribution, as in Soft Thinking, a pretrained language model defines a discrete-time map with continuous states, whose dynamics can be mapped, predicted from derivatives at selected transitions and in places proved, and whose consequences for inference depend on the feedback architecture and the numerical regime. In Qwen2.5, OLMo-2 and Llama-3 models of 0.5B to 72B parameters, temperature and steering move the loop between periodic dynamics, which write repeating text, and regimes with positive finite-time Lyapunov exponents that automatic-differentiation tangents reproduce. We call these regimes chaotic as a numerical label, not a proof of an asymptotic chaotic set; 74 to 92 % of sampled labels persist to $10^5$ steps. Finite-time expansion has direct consequences for reproducibility. Rerun with only the batch size changed, chaotic float64 loops separate until their most probable tokens differ, on the schedule the Lyapunov exponent sets, while periodic loops mostly stay together, in four models up to 70B; in Qwen2.5-0.5B the text changed in 173 of 192 chaotic loops but in only 7 of 192 periodic ones. In a control fixed in advance in Qwen2.5-0.5B (448 cells), with the matrix shapes held fixed the runs are bitwise identical, and a displacement injected instead grows on the same schedule, although one secondary criterion failed (from a displacement of $10^{-9}$ on, more than 10 % of the periodic loops also separated). In arithmetic tests designed before the runs, changing only the batch layout, which alters the floating-point execution while the intended computation stays the same, changed the answers of bfloat16 soft-thinking inference on 56 % of 96 problems in a 0.5B model and 55 % in a 7B model, far more often than with greedy decoding; an exploratory reset of the fed-back state at every step removed most of these changes. In tests fixed before their data, Soft Thinking with its published settings changed 21 % of its answers to GSM8K problems not used before in this study with the batch layout alone, and reasoning models that answer 86 to 90 % of them correctly (DeepSeek-R1-Distill-Qwen-7B, QwQ-32B) changed 14.5 and 19.5 %, the two layouts disagreeing on correctness for 11.7 and 14.5 % of the problems. Ordinary sampled reasoning with the same random numbers changed about as many, so this sensitivity is not unique to continuous feedback. Two mechanisms contribute, depending on the model. In float64 the loops of Qwen2.5-7B and DeepSeek-R1-Distill-Qwen-7B mostly contract, so their answer changes are bfloat16 rounding carried by long feedback to answers that sit near ties, while the loops of

QwQ-32B and DeepSeek-R1-Distill-Llama-8B grow slowly in more than half of the copies, and a relative displacement of $10^{-10}$ alone changes about 14 and 18 % of their answers, respectively. Exactly repeating text can hide a state with a positive finite-time exponent: the text records only the most probable token, which can repeat while the fed-back probabilities do not repeat over the run. In Qwen2.5-0.5B, along recorded orbits, the growth that steering adds comes mainly from the readout, where next tokens compete; a logit bias alone suffices for chaotic cells. Earlier injection carries chaos to lower temperature, and steering at two depths creates chaos neither depth causes alone. Whether a prompt's loop is chaotic does not predict the accuracy of ordinary sampled answers beyond what the model's uncertainty about its first answer token predicts, and within the precision of the tested designs we detect no edge-of-chaos advantage. The loop shows quantitative signatures of low-dimensional maps: late finite-order doubling ratios approach Feigenbaum's constant numerically (4.6688 against 4.6692, at the float64 floor of the computation), periodic windows accumulate on folds with distances close to a $1/N^2$ law, passage times predicted in advance from fold normal forms came within one iterate of the return map in 42 of 48 cases at four new folds (the six misses, at a period-6 fold, 3 to 5 % short), and interval arithmetic proves an attracting period-8 orbit and, at one parameter cell, two coexisting attracting orbits of periods 2 and 3. In the recurrent-depth model Huginn, a frozen test confirmed a predicted accuracy loss. The loop is not ordinary sampled generation.

# 1 Introduction

Several recent inference methods feed a language model its own continuous output. Soft Thinking replaces each sampled token by the expected embedding under the next-token distribution [1], latent-reasoning methods feed hidden states back [2], and recurrent-depth models iterate a block toward a fixed point [3]. Each turns inference into an iterated map, and an iterated map can be chaotic. We show that the expected-embedding loop of released language models is chaotic, in the finite-horizon sense defined below, over wide ranges of temperature and steering strength, trace where the growth that steering adds comes from, and measure what the chaos does: in a chaotic regime an irrelevant change of batch layout can change what the loop writes (in Qwen2.5-0.5B it changed the text of 173 of 192 chaotic float64 loops, but of only 7 of 192 periodic ones). In bfloat16, where nearly every loop diverges, the batch layout changed the answers of a short soft-thinking pipeline on 56 % and 55 % of 96 arithmetic problems in two models. The same loops show quantitative signatures of low-dimensional dynamics, with late doubling ratios that approach Feigenbaum's constant numerically. In short, fed back through its own soft next-token distribution, a pretrained language model defines a discrete-time map with continuous states whose dynamics (periodic windows, period-doubling cascades, chaotic regimes and shrimp-shaped windows, the "shrimps" named by Gallas [4]) can be mapped, predicted from derivatives at selected transitions and in places proved; their consequences for inference depend on the feedback architecture and the numerical regime.

Three consequences follow for the use of such loops. The first concerns reproducibility: in a chaotic loop, differences far below anything a user controls, such as the batch layout or the numerical precision, can change the output: a chaotic loop amplifies them, and long low-precision feedback can carry them to answers that sit near ties even where the float64 loop contracts. In an exploratory test resetting the fed-back state before every soft step removed nearly all such changes (Section 6). Ordinary numerical nondeterminism can thus become irreproducibility of the output, because the feedback amplifies or carries it. The second concerns steering: practitioners choose steering strengths, and here the strength is a bifurcation parameter, so near a boundary a small change switches the attractor or brings chaos, and a smooth dose-response cannot be assumed (Section 17). The third concerns prediction: where the loop is periodic, normal forms computed

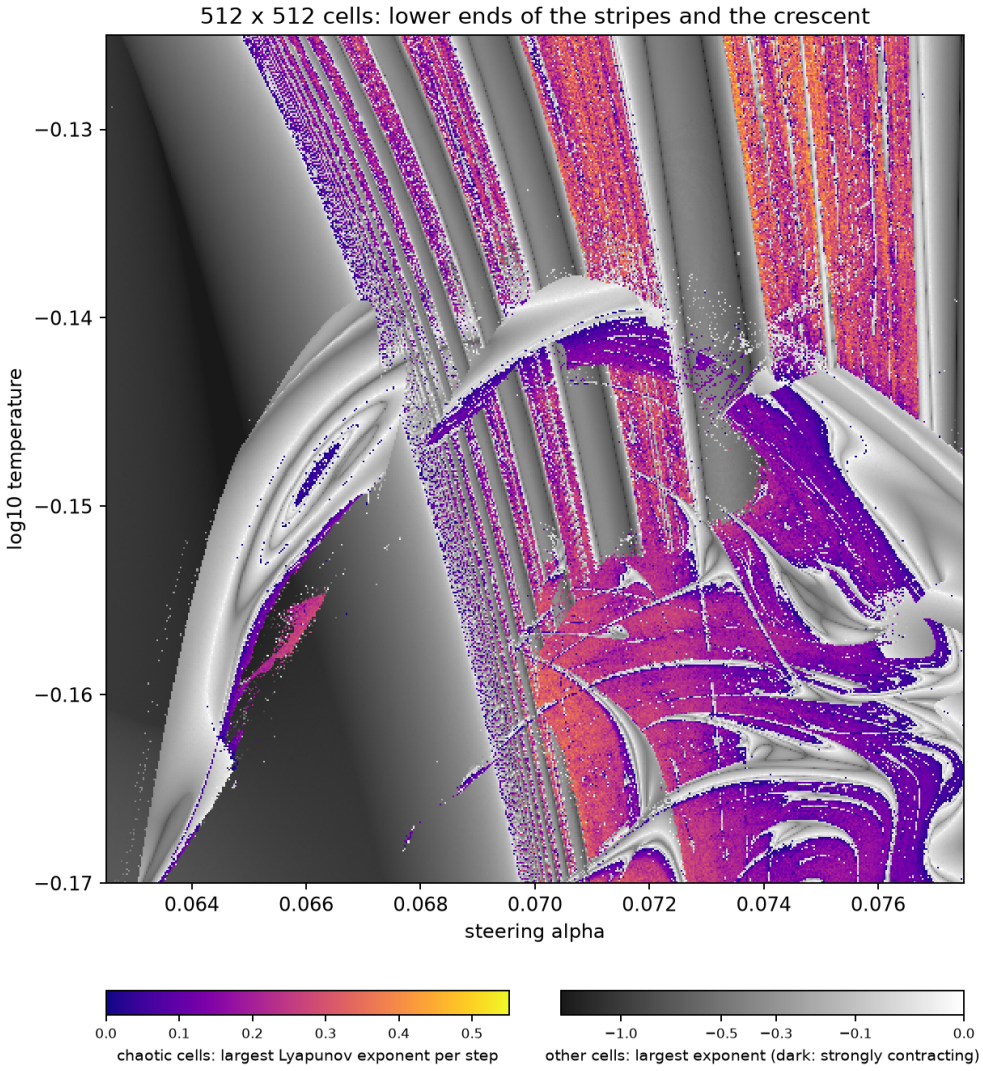


**Figure 1:** Chaos and repeating text in a language model fed its own output: the soft-token map of Qwen2.5-0.5B-Instruct, steered along the philosophy direction at layer 12, on $512 \times 512$ float64 cells over the steering strength $\alpha \in [0.0625, 0.0775]$ and the temperature, $\log_{10} T \in [-0.17, -0.125]$. Colored cells are chaotic by the finite-horizon criterion of Appendix B, and the color gives their largest Lyapunov exponent (left color bar). In gray cells the model settles into a repeating loop of text, shaded by its largest exponent, which measures how strongly the loop contracts (right color bar; light gray: close to losing stability); 4.4 % of the cells, also gray, have neither a detected period nor an exponent above $10^{-3}$. Figure 11 names the loops.

from the model's derivatives predicted passage times fixed before they were measured: at four new folds the normal form's passage integral (the secondary predictor of the first test, the primary of the second) came within one iterate of 42 of 48 passages, and the other six were 3.1 to 5.2 % short (Section 8), so the quantitative tools of dynamical systems apply to the inference loops of released models, and larger models do not simply leave the chaos behind (Section 14). We also report a negative result: beyond the model's first-token uncertainty, the loop's regime carries no detectable information about the accuracy of ordinary sampled answers.

Figure 1 shows a small piece of the parameter plane of one such map, built from Qwen2.5-0.5B-Instruct. Cells with a positive finite-horizon Lyapunov exponent lie side by side with windows in

which the model repeats a fixed loop of text. Parts of this picture have been seen before. Recent work has measured chaos-like sensitivity in language-model generation [5, 6], temperature-driven changes of output statistics [7–11], periodic attractors of paraphrasing loops [12], attractor states of model-to-model conversations [13], and, through their Jacobians, the stability of looped and recurrent-depth models [14–17], and finite-depth readout dynamics have been used to predict the answers of looped models [18]. Besides Soft Thinking, probability-weighted vocabulary embeddings are fed back in training [19]. In a small task-trained looped transformer, fold coefficients computed from derivatives predict passage times and spectral gaps without fitting [20].

We study the expected-embedding ("soft-token") map of released pretrained language models, defined exactly by their stored weights and run with a fixed chat prefix at a fixed position. We follow it in fifteen models, from Qwen2.5-0.5B to Llama-3.3-70B and Qwen2.5-72B (three dense families and a mixture of experts, with three further models as controls for the latter), in most detail in Qwen2.5-0.5B-Instruct, and in two variations: two models writing one text, and a recurrent-depth model that iterates its own block. We chose these families because each releases open weights at several sizes, so that size can be varied within a family, and because they come from three developers with different training data and recipes; OLMo-2 also releases its training data, and Llama-3 has public sparse autoencoders, which we use for feature controls. The map is smooth. Its Jacobians come from automatic differentiation, and its periodic orbits can be computed and continued like those of any smooth map. Chaos and periodic windows occur in many nonlinear feedback systems. Random-network theory, in which a specified ensemble of recurrent networks becomes chaotic above a critical gain, in continuous time [21] and in discrete time by a quasi-periodic route [22], and the period-doubling cascades and shrimp-shaped domains of low-dimensional maps [4, 23] motivate looking for such structure here, but they do not show that a trained network realizes it. We test this directly. We locate chaos and periodic windows in the models' parameter space, read the texts the loop writes there, and check whether bifurcation theory, applied to derivatives computed from the model, predicts its behavior before the behavior is measured. The models realize this structure, and the predictions largely hold. We also show what the loop's derivative says about where chaos can occur and where the growth that steering adds comes from (Section 3; Section 12 assembles the pieces into one picture), and that larger models do not simply leave it behind (Section 14). Ordinary sampled generation with a growing context is a different system; Section 13 also measures how much of the mechanism survives sampling.

**Terms and scope.** Throughout, *chaotic* is a numerical label: after a transient, the largest finite-time Lyapunov exponent exceeds $10^{-3}$ and no period up to a cutoff is detected (Appendix B). It is evidence of finite-time exponential separation along the measured trajectories, not a proof of an asymptotic chaotic set, and some labeled cells are long transients that a periodic orbit eventually captures: in random samples, 74 and 92 % of the labels of two maps persist to $10^5$ steps (Section 5). We call the computed exponents finite-time exponents and reserve "chaotic attractor" and "chaotic set" for cases with stronger evidence. Where we draw such sets (Figure 13) we call them numerically observed attractors: sets that the tested trajectories approach and then stay near over the recorded horizon. Their invariance and attraction are finite-time numerical evidence, not certified; the interval-certified cycles are attractors without qualification. The loop itself is the soft-token feedback map, iterated in discrete time, not a Poincaré return map; by a return map of a scalar observable $s$ we mean the graph of $s_{n+k}$ against $s_n$. Each claim is stated for the system on which it was measured. The autonomous soft-token map (a fixed prefix and one fed-back token), its versions with a longer fed-back memory, growing-context Soft Thinking, sampled thinking with common random numbers, ordinary generation and the recurrent block of Huginn are different systems, and

results do not transfer between them without a test. Table 1 lists the main claims with the kind of evidence behind each.

**Contributions.** The results fall into four groups.

1. *Chaos in released models, and what it does to inference* (Sections 5 and 6; Appendix H). Temperature and steering move the loop between repeating text and chaos with embedded windows in all three model families, Qwen2.5, OLMo-2 and Llama-3. The regime decides whether rounding differences between runs grow. Run twice with only the batch layout changed, 190 of 192 chaotic float64 loops of Qwen2.5-0.5B grow past a relative distance of $10^{-2}$ after a median of 102 steps, in line with the Lyapunov exponent (median ratio 0.91), and at 173 of them the most probable readout token comes to differ; 182 of 192 periodic loops stay within $10^{-2}$, and at only 7 of them does the most probable token come to differ. Qwen2.5-7B and Llama-3.1-8B without steering (24 of 24 and 20 of 20 chaotic loops diverge, 0 of 24 and 1 of 20 periodic ones) and Llama-3.3-70B with steering (24 of 24, none of 24) behave alike. In bfloat16 nearly every loop diverges, and in a frozen test on 96 additions the batch layout changed the answer of a soft-thinking pipeline in 56 % of problems in Qwen2.5-0.5B and 55 % in Qwen2.5-7B, against never and 10 % for a forced greedy baseline. An exploratory causal test shows that the loop carries this: resetting the fed-back state before every soft step removes nearly all of it (on an H100, 66 against 1.6 % of answers changed in Qwen2.5-0.5B, and 64 against 1.6 % in Qwen2.5-7B), and accuracy changes by at most 5 points. In a test frozen before its data, Soft Thinking with its published settings changed the answers to 21 % of 256 GSM8K problems not used before in this study in Qwen2.5-7B with the batch layout alone, on an H100, mostly between wrong answers; replaying the fed-back tokens cut this to 6 %; with reasoning models that answer 86 to 90 % of the problems correctly through soft thinking (DeepSeek-R1-Distill-Qwen-7B and QwQ-32B), 14.5 and 19.5 % of the soft-thinking answers changed, and a similar share with discrete sampled thinking. A chaotic loop's text reuses the phrases of neighboring loops in no fixed order, and a copy started $10^{-10}$ away writes the same text for 9 to 150 steps, then a different one (Table 3). Exactly repeating text can hide a state with a positive finite-time exponent: the text records only the most probable token, and the same token can win at every step while the probabilities behind it, which the loop feeds back, do not repeat over the run (Section 10). Beyond the model's first-token uncertainty, the loop's regime carries no detectable information about the accuracy of ordinary sampled answers, and within the precision of the tested designs we detect no advantage at the edge of chaos.

2. *Why the loop can be chaotic, and where the growth that steering adds comes from* (Section 3). The loop's derivative factorizes into the inverse temperature, the covariance of token embeddings under the model's own next-token distribution (a cross-covariance for untied embeddings), and the network's Jacobian; with tied embeddings and without the network the map would be a modern Hopfield update, which cannot cycle. The factorization proves contraction at sufficiently high temperature and, at fixed steering strength and sufficiently low temperature, excludes chaos on invariant sets whose margin between the two leading tokens stays bounded away from zero as the temperature falls; the zero-temperature limit is eventually periodic, and chaos in our sweeps occupies intermediate temperatures. Stability belongs to the loop, not to its steps: along a period-8 orbit every step expands some direction while the cycle contracts. Along the recorded orbits, the growth that steering adds comes mainly from the readout, where next tokens compete. Steering into chaos raises the readout factor of each step's growth by 2.58 nats per step relative to nearly unsteered cells, while the network factor

**Table 1:** The main claims and the kind of evidence behind each. Identity: an analytic identity, checked numerically. Proof: computer-assisted, by interval arithmetic. Numerical: float64 computation with independent checks (tangent exponents, Newton residuals, continuation gates, longer horizons). Frozen: a test whose design, sample and criterion were fixed and pushed before its data. Exploratory: found by search or by an analysis designed after seeing data; structures selected this way are not estimates of how common they are. Details, amendments and failures are in Appendix L.

| Claim | Evidence | Where |
|---|---|---|
| The loop's derivative factorizes into a readout covariance (a cross-covariance for untied embeddings) and the network's Jacobian | identity | Sec. 3 |
| Chaotic regimes with periodic windows in 15 models; 74–92 % of sampled labels last $10^5$ steps | numerical | Secs. 5, 14 |
| Chaotic float64 loops separate on the Lyapunov schedule when only the batch layout changes | numerical | Sec. 6 |
| With fixed matrix shapes the runs are bitwise identical; injected displacements grow on the Lyapunov schedule (Qwen2.5-0.5B, 448 cells; a secondary criterion failed) | frozen | Sec. 6 |
| The batch layout changes long-feedback answers (bfloat16 pipelines, Soft Thinking, reasoning models) | frozen | Sec. 6 |
| Resetting the fed-back state removes most of these changes | exploratory | Sec. 6 |
| Along recorded orbits, the growth that steering adds comes mainly from the readout, where next tokens compete (0.5B model; weaker evidence at 7B; a frozen sufficiency criterion failed by overshoot) | interventions; partly frozen | Sec. 3 |
| Fold normal forms predict passage times (42 of 48; both all-row criteria failed) | frozen | Sec. 8 |
| Late doubling ratios approach Feigenbaum's $\delta$, at the float64 floor | numerical | Sec. 9 |
| 13 of the 17 tangent reversals of the continued fold curves are located cusps (four found on 18 October are not located); local unfoldings match Newton solves | numerical; unfoldings frozen | Sec. 11 |
| A period-5 window is a shrimp in a two-parameter plane (boundary organization) | numerical; found by search | Sec. 11 |
| An attracting period-8 orbit exists | proof | App. L |
| Attracting orbits of periods 2 and 3 coexist at one parameter cell, with certified token loops and basin neighborhoods | proof | App. L |
| No accuracy information beyond first-token uncertainty; no edge-of-chaos advantage | frozen; bounded nulls | Sec. 6 |
| Huginn: a predicted accuracy loss | frozen | Sec. 15 |

changes by only $-0.07$ (interval $[-0.23, 0.12]$); a logit bias alone, with the network unsteered, makes 3.5 % of its grid chaotic; and an orbit-preserving crossover, which apportions the growth along the recorded orbits, assigns it to steering's change of the readout ($+0.81$ nats per step in the 0.5B model), not of the network, whose change damps it ($-0.49$). Random directions also steer into chaos. Earlier steering carries chaos to lower temperature, in Qwen2.5-0.5B and Llama-3.3-70B, and two vectors at two depths create chaos where neither alone does (Section 6).

3. *Low-dimensional organization, predicted from derivatives* (Sections 7 to 11). The windows carry concrete texts: a period-adding family gains one "is X" pair per period step. A fold's normal form, computed from derivatives, predicts without fitting how long trajectories linger near the vanished orbit: in two frozen tests at four new folds, 42 of 48 forecasts fell within one iterate, and both all-row criteria failed (the second because passages from the entrance of a period-6 fold's channel came in 3 to 5 % short), and windows accumulate on the fold with distances close to a $1/N^2$ law (log-log slope $-2.00$; fitted with an offset, the free exponent ranges from 2.13 to 2.45 with the fit range). On the eleven fold curves we continued, 13 of the 17 tangent reversals are located cusps (the four found on 18 October are not located), and near them local unfoldings, frozen before solving, matched the orbits that Newton solves recovered at twelve parameter offsets in number and at eleven in stability. A doubling cascade has superstable points through period 768 and finite-order Feigenbaum ratios that approach $\delta$ numerically (the last, 4.6688, against 4.6692, at the float64 floor of the computation). A period-5 window of a plane steered at two depths is a numerically verified shrimp: followed cell by cell, its attractor fills a main cell with legs and doubling shells bounded by fold and flip curves, a trace-zero loop replaces the head of a one-dimensional shrimp, and twice the fold curve has two cusps of opposite kinds and a self-crossing. Around one of these junctions an orbit census fixed in advance matched the predicted counts at 9 of 13 points and found two coexisting attracting orbits at all five points inside it. An interval-arithmetic proof shows that a primitive period-8 orbit exists and is locally attracting, to our knowledge the first proof of a periodic orbit of a full transformer language-model map. A second proof of the same kind shows that at one parameter cell a period-2 and a period-3 orbit coexist, each unique in its box and locally attracting, each with a certified, if tiny, neighborhood of its basin: two different attracting behaviors under identical settings (Appendix L).

4. *Beyond the one-token loop* (Sections 13 to 16). The chaos is not an artifact of the one-token window: with a memory of 8 or 16 soft tokens Qwen2.5-7B is chaotic at more temperatures than with one, and in Soft Thinking's growing context a tiny early perturbation grows exponentially inside its one-token chaotic band, though not in every model. The organization recurs across families, and size does not set the chaos: across fifteen models from 0.5B to 72B, a larger model's chaos can move to higher temperature instead of vanishing. Resolved through the stack, the network damps a change of the fed-back token more strongly in the larger Qwen2.5 and Llama-3 models, because in them the change of the fed-back token does not keep pace with the residual stream as it grows through the blocks; a mixture of experts with 3B of its 35B parameters active per token damps more than a dense 9B model of its family. Two loops writing one text lock each other into periodic orbits: 60 % of pairs of differently steered 0.5B agents that are each chaotic alone are periodic together (twelve such orbits verified by Newton's method). In a second system, the recurrent-depth model Huginn, a spectral estimate ranks held-out questions by the size of their residual under relaxation, and a frozen generation test confirms the predicted accuracy loss at relaxation 1.20 and noninferiority at 1.05.

**Related work.** Chaos-like sensitivity of generation [5, 6, 24], temperature-driven changes of output statistics [7–10], repetition loops [25, 26] and behavioral attractors of paraphrasing and conversation [12, 13] have been measured in generated text, and one study fits a noisy effective map to a hidden-state coordinate [11], but none of these computes the orbits, multipliers or bifurcations of the model's own map. Equilibrium, looped and recurrent-depth models have been analyzed through fixed points and Jacobians [3, 14–17], and the closest methodological precedent, a derivative-based fold analysis of a small task-trained looped transformer, predicts passage times and spectral gaps without fitting and derives from the same bottleneck an $N^{-2}$ tail of relaxation times over inputs [20]. We know of no earlier prospective test of quantitative predictions from a pretrained language model's own derivatives (here passage times at four new folds, where 42 of 48 forecasts fell within one iterate and both all-row criteria failed, by one row and at the entrance passages of a period-6 fold, and the orbits recovered and their stabilities at frozen offsets near cusps), of no earlier frozen held-out test of a spectral prediction of a pretrained language model's response to relaxation, which we give for Huginn, and of no earlier computer-assisted proof of a periodic orbit, or of coexisting attractors, of a full transformer language-model map. These statements rest on targeted searches (12 and 15 October 2026) that found no prior work combining these elements for the feedback map of a pretrained language model: an absence of evidence within the search, not a proof of priority. Appendix A discusses this work, expected-embedding feedback, and bifurcations, Feigenbaum ratios and shrimps in neural models in detail.

## 2 The inference map

**Definition.** We describe the map for Qwen2.5-0.5B-Instruct, the model studied in most detail; the other models enter the same construction with their own embeddings and steering layers (Appendix H). Let $E \in \mathbb{R}^{V\times d}$ be the input embedding matrix ($V = 151{,}936$, $d = 896$). The model reads a fixed chat prefix, with the system prompt "You are an AI talking with another AI. You have complete freedom. Feel free to pursue whatever you want." and the user turn "Hello!", followed by a single input embedding $x$, and produces next-token logits $z(x) \in \mathbb{R}^V$. The soft-token map feeds the expected next-token embedding back in place of $x$:

$$F_{T,\alpha}(x) = E^\top \operatorname{softmax}(z_\alpha(x)/T), \tag{1}$$

where $z_\alpha(x)$ are the logits computed with $\alpha v$ added to the residual stream at layer 12 at every position, prefix included; the steering vector $v$ is described in the next paragraph. Positions are fixed and the window does not grow, so $F$ is an autonomous map of $\mathbb{R}^{896}$. As $T \to 0$ it reduces, where the argmax is unique, to greedy decoding of the same fixed-prefix, one-token-window system. It is not ordinary generation with a growing context.

**How we steer.** Steering adds one fixed vector to the network's internal state while it runs; no weight is changed. The state it changes is the residual stream, the $d$-dimensional vector carried at each token position, to which every attention and MLP block adds its output. Our main direction, philosophy, is built in three steps from 16 short texts (`tools/explore_llm_phase_map.py`, `CONCEPTS` and `NEUTRAL`): eight philosophical sentences, such as "What is the nature of consciousness and subjective experience?" and "Is there something it is like to be me?", and eight neutral ones, such as "The meeting is scheduled for nine in the morning." and "The package weighs two kilograms." First, each text is run through the unsteered model, without the chat template, and the residual-stream vector after decoder layer 12 (of 24, counted from 0) is read at its last token. Second, the direction is the mean of these vectors over the philosophical texts minus their mean over the neutral

texts. Third, it is rescaled to the mean residual norm at that layer over the 16 texts, $\|v\| = 189$, so that $\alpha$ is the push as a fraction of a typical residual vector: $\alpha = 0.07$ adds 7 % of one. The raw difference has norm 8.1, so $\alpha \approx 0.043$ reproduces the natural contrast between the two groups of texts, and the values of Figure 11, 0.0625 to 0.0775, push 1.5 to 1.8 times as far. During the loop, $\alpha v$ is added to the output of layer 12 at every position, each prompt token and the fed-back soft token, in every forward pass, so that the prompt's keys and values are computed with the push as well (Figure 2). The other concept directions (gratitude, hostility, kindness and cooking, each with eight sentences) are built the same way at their own layers, and the specificity controls use norm-matched random directions, single MLP neurons and sparse-autoencoder features (Appendices J and I).

**State space and regularity.** Attention is causal, so the keys and values of the prefix do not depend on $x$, and $F$ is an autonomous map of $\mathbb{R}^{896}$. For the dense models studied here it is real-analytic, because RMS normalization (with its positive regularizing constant), the SiLU activation, attention, rotary embeddings at fixed positions and the softmax readout are analytic; the top-$k$ routing of a mixture of experts makes the map only piecewise smooth. The continuity and differentiability arguments below apply to the dense models; hard-routed mixtures of experts need separate checks at routing boundaries. Every soft token is a convex combination of embeddings, so $F$ maps $\mathbb{R}^{896}$ into the compact convex polytope $K = \mathrm{conv}\{e_t\}$, and $F(K) \subset K$. Every orbit therefore enters $K$ after one step, $F$ has a fixed point in $K$ by Brouwer's theorem, and, being continuous on a compact set, it has invariant probability measures there. Because $\log^+\|DF\|$ is bounded on $K$, Oseledets' multiplicative ergodic theorem applies, in its version for non-invertible maps, which allows exponents equal to $-\infty$: for every invariant measure the Lyapunov exponents exist at almost every point [27, 28]. The exponents we report estimate them over finite horizons (Appendix B).

**Why feed a model its own output?** Feedback is not an addition to language-model inference; it is how text is generated. Autoregressive decoding appends each chosen token to the input and conditions the next step on it, and as $T \to 0$ the map studied here becomes greedy decoding wherever the most probable token is unique; the familiar repetition loops of greedy decoding are then the cycles of the limit. What the loop changes is what is fed back: the expected embedding instead of one chosen token. That is the step of Soft Thinking [1], and related methods feed back hidden states [2] or iterate a block to a fixed point [3]; continuous feedback of this kind is studied because it can carry more than one token's worth of information. We also hold the prefix and the window fixed. That simplification is deliberate: it makes the loop an autonomous map whose orbits, exponents and bifurcations can be computed, and in one case proved, much as low-dimensional maps made the routes to turbulence tractable. This fixed-prefix, fixed-window soft-token map differs both from ordinary autoregressive generation, whose context grows, and from recurrent-depth (looped) transformers, which repeatedly update hidden states through a shared block [3, 29, 30]; dynamical methods apply to both kinds of loop, but their update operators, and therefore their derivatives and stability conditions, differ. We then test which effects survive in the fuller systems: Soft Thinking's growing context, sampled decoding, longer fed-back memories and two models writing to each other (Appendices G and 16). The answer-level consequences reported below were measured in a soft-thinking pipeline with a growing context, not in the reduced loop. Deployed systems feed outputs back as well, when agents read their own earlier steps and when pipelines chain model calls.

**Steering as a probe.** Steering is an established way to control a language model without retraining: a vector added to the residual stream, typically the mean difference between activations

on contrasting prompts, strengthens or weakens a behavior, such as sycophancy or refusal [31], sentiment or topic [32], or a personal style of writing [33], and representation engineering uses such directions to read and control concepts [34]. Our recipe is the standard contrastive one [31], added at every position, and our pushes are moderate: at most 12 % of the mean residual norm per vector in every map (the continued curves reach 13.1 %), and 6.25 to 7.75 % in Figure 1. Pushes of this size do change what a model writes, which is what steering is for: in Qwen2.5-7B, 1 % of the residual norm is the largest push that kept greedy accuracy on a multiplication task within 5 points (Appendix D). They are far smaller than activation additions reported as effective in steering work, one of which has nearly ten times the norm of the residual stream it is added to [32]. We do not steer to make the model behave in a particular way. We use steering as a probe: $\alpha$ is a control parameter, like the amplitude of a periodic forcing, that moves the model through a one-parameter family of nearby maps without retraining it, so that bifurcation curves can be traced. The chaos does not depend on it: at $\alpha = 0$, temperature alone gives chaos with periodic windows in Llama-3.1-8B, Qwen2.5-7B and OLMo-2-7B, and in a narrow band in Qwen2.5-0.5B (Appendix J). Nor, in the 0.5B and 8B models, does the direction's meaning: random, sparse-autoencoder and single-neuron directions of the same norm make the map chaotic about as often as the concept directions (at 70B the directions differ; Appendix I).

**Precision.** Hugging Face RMSNorm layers and rotary-embedding tables compute in float32 even when the model is cast to float64, so we patch both. A float32 map is accurate to $3 \times 10^{-6}$–$2 \times 10^{-5}$ per step. That is enough for phase maps (245 of 256 test cells agree with float64) but not for derivatives of composed maps: one-step float32 Jacobian-vector products are accurate to $5 \times 10^{-5}$, yet the 8-step monodromy of a period-8 orbit is off by 3%. All orbits, multipliers and test functions below are therefore computed in float64.

## 3 Why the loop can be chaotic

Chaos requires that nearby states drift apart: a small difference $\delta x$ between two states must, on average, grow from one step to the next, which is what a positive largest Lyapunov exponent measures (such growth alone does not make an attractor chaotic). To first order, one step multiplies the difference by the derivative of the map, so the question is decided there. The soft-token map $F_{T,\alpha}$ of (1) has a simple derivative with respect to the state $x$. With $p = \mathrm{softmax}(z_\alpha(x)/T)$,

$$DF_{T,\alpha}(x) = \frac{1}{T}\, E^\top (\operatorname{diag} p - pp^\top) J_{z_\alpha}(x). \tag{2}$$

Qwen2.5-0.5B ties its output matrix to the input embedding, so $z_\alpha = E\tilde{h}_\alpha(x)$, where $\tilde{h}_\alpha$ is the final normalized hidden state of the steered network, and the derivative factorizes:

$$DF_{T,\alpha}(x) = \frac{1}{T}\, \Sigma_p\, J_{\tilde{h}_\alpha}(x), \qquad \Sigma_p = E^\top (\operatorname{diag} p - pp^\top) E = \mathrm{Cov}_{t\sim p}(e_t). \tag{3}$$

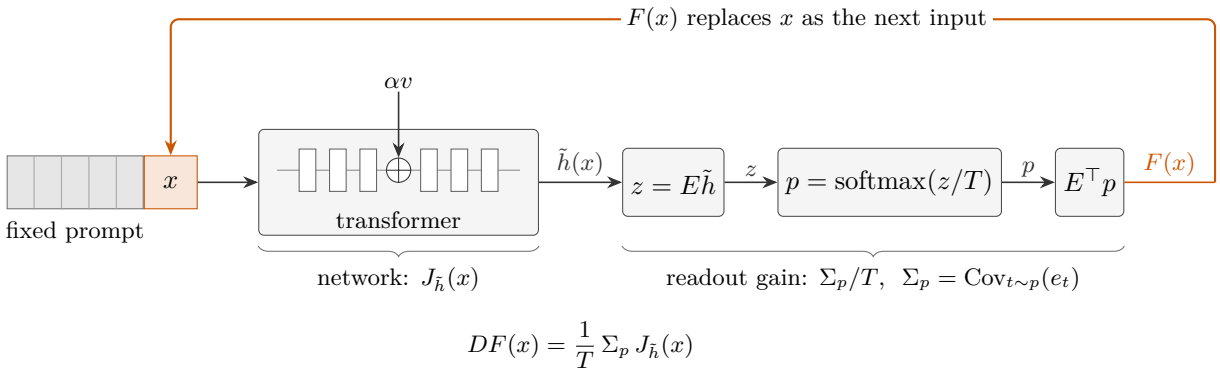


**Figure 2:** The soft-token loop. A fixed prompt is followed by one input embedding $x$. The transformer, with $\alpha v$ added to the residual stream at a middle layer (at every position), gives the final normalized hidden state $\tilde{h}(x)$ at the position of $x$; with tied embeddings the logits are $z = E\tilde{h}$ (untied: $z = W\tilde{h}$), and $p = \mathrm{softmax}(z/T)$ is the next-token distribution. The expected embedding $E^\top p = F(x)$ is fed back as the next input, at the same position after the same prompt. Below: the two factors of the derivative (3), the network's Jacobian $J_{\tilde{h}}$ and the readout gain $\Sigma_p/T$. Without the network, $\tilde{h}(x) = x$ and $J_{\tilde{h}} = I$, the loop $F(x) = E^\top \mathrm{softmax}(Ex/T)$ is the update of a modern Hopfield network [35], which lowers an energy at every step and so cannot cycle (Section 3).

The derivative of the loop (Figure 2) is the covariance of the token embeddings under the model's own next-token distribution, amplified by the inverse temperature and composed with the derivative of the network. The network factor $J_{\tilde{h}_\alpha}$ is the derivative of the whole transformer, with every attention layer, MLP block, normalization and residual connection and the steering included (attention depends on $x$ through the query, key and value of the fed-back position; those of the fixed prefix do not change); the factorization only separates it from the readout. The covariance form is the standard identity for the Hessian of the log-partition function of an exponential family [36], the Jacobian of the softmax [37], and it appears explicitly in the Jacobian of the modern Hopfield update [35]; here it is composed with the derivative of the full transformer. Each factor has a plain meaning. The network Jacobian $J_{\tilde{h}_\alpha}$ says how much the transformer's final hidden state moves when its input moves, through all of its attention and MLP blocks. The factor $\Sigma_p/T$ is the derivative of the fed-back expected embedding with respect to that hidden state. Its matrix $\Sigma_p$ is the variance of the token embeddings under the next-token distribution: it is large when tokens with different embeddings share the probability, so that a small change of the logits moves the expected embedding far, and it tends to zero as one token takes all the probability. The scalar $1/T$ multiplies the whole derivative.

At a state of the period-8 orbit of Table 6, (3) agrees with forward-mode derivatives of the full map to a relative error of at most $1.35 \times 10^{-13}$ over eight random directions (Figure 3; `tools/softmax_gain.py`). Without tied embeddings, as in the 7B and 8B models, the logits are $z_\alpha = W\tilde{h}_\alpha(x)$ with an output matrix $W \neq E$, and $DF_{T,\alpha} = T^{-1}E^\top(\mathrm{diag}\, p - pp^\top)W J_{\tilde{h}_\alpha}(x)$: $\Sigma_p$ becomes the cross-covariance $\mathrm{Cov}_{t\sim p}(e_t, w_t)$ of input and output embeddings, which is not symmetric in general. The temperature limits below do not change. The rest of this section uses the factorization in four ways: it shows where steering and temperature enter; it shows that, with tied embeddings, the transformer between input and output is what makes cycles and chaos possible at all (untied embeddings can cycle even without it); it proves that the loop contracts at sufficiently high temperature and, at fixed steering strength and sufficiently low temperature, excludes chaos on invariant sets whose margin between the two leading tokens stays bounded away from zero, while stability belongs to the composed loop rather than to single steps; and three measurements show

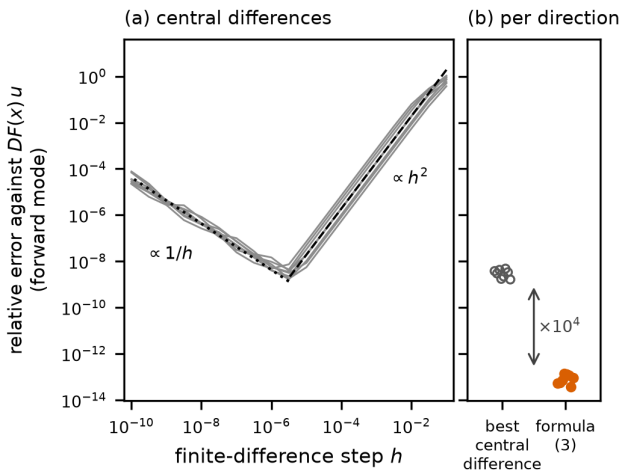


**Figure 3:** Formula (3) is exact up to rounding. At a state of the period-8 orbit of Table 6 (Qwen2.5-0.5B-Instruct, philosophy direction at layer 12, $\alpha = 0.071674$, $\log_{10} T = -0.115$, float64), in eight random unit directions $u$, each derivative is compared with the network's forward-mode derivative $DF(x)\,u$. (a) Central differences $(F(x + hu) - F(x - hu))/(2h)$. For large steps $h$ their error is truncation, which falls like $h^2$ as $h$ shrinks (dashed line, slope 2; fitted slopes 1.98 to 2.00 for $10^{-4} \le h \le 10^{-2}$); below $h \approx 3 \times 10^{-6}$ rounding takes over and the error grows like $1/h$ (dotted line). (b) Each direction's best central difference (open circles, $1.7 \times 10^{-9}$ to $4.8 \times 10^{-9}$) and the factorized derivative $T^{-1}\Sigma_p J_{\tilde{h}}(x)\,u$ of formula (3) (filled, $3.8 \times 10^{-14}$ to $1.35 \times 10^{-13}$), which has no step size: the formula agrees with forward mode more than four orders of magnitude more closely than any finite difference.

that, along recorded orbits, the growth steering adds comes mainly from the readout, where next tokens compete.

**Where steering and temperature enter.** Temperature appears in (3) explicitly, as the factor $1/T$ and inside $p$. Steering does not appear, and this is not an omission: the vector $\alpha v$ is added to the residual stream whatever the state, so it contributes no derivative of its own with respect to $x$. It acts, as temperature also does, by moving the point at which the two factors are evaluated. In the readout factor $\Sigma_p/T$, steering decides which tokens compete in $p$ and temperature decides how sharply: $\Sigma_p$ is large where tokens with different embeddings share the probability and tends to zero as one token takes all of it. In the network factor $J_{\tilde{h}_\alpha}$, steering shifts the operating point of every later block (attention weights, MLP activations and the scale of each RMS normalization), and so changes how strongly the network stretches a change of the fed-back token; temperature changes this factor too, because it moves the orbit along which the factor is evaluated. On the two main maps both parameters move both factors (orbit averages along the trajectories of Figure 5, power-iteration estimates). Grouping the cells by steering strength alone accounts for 7 and 33 % of the variance of the network term $\langle \log \|J_{\tilde{h}_\alpha}\| \rangle$ over the stripes map and the crossing window, and grouping them by temperature alone for 47 and 4 %; for the readout term $\langle \log(\|\Sigma_p\|/T) \rangle$ the shares are 30 and 32 % (steering) and 21 and 27 % (temperature). Which of the two changes turns the loop chaotic is measured later in this section ("Steering makes tokens compete"). From here on we drop the subscripts of $DF$ and $J_{\tilde{h}}$ when $(T, \alpha)$ is fixed. Every condition that involves them, the gain condition and the threshold $T_*$ below among them, describes a region of the $(\alpha, T)$ plane, not a range of $T$ alone.

**A Hopfield network with a transformer inside.** If the network passed its input straight through, $\tilde{h}(x) = x$, the map would be $F(x) = E^\top \mathrm{softmax}(Ex/T)$. This is exactly the update rule of a modern Hopfield network whose stored patterns are the token embeddings, at inverse temperature $\beta = 1/T$ [35]. That update lowers an energy function at every step and converges to fixed points. In (3) it is the case $J_{\tilde{h}} = I$, where $DF = \Sigma_p/T$ is symmetric and positive semidefinite. The energy argument covers every map with that property. If $DF$ is symmetric and positive semidefinite everywhere, then $F = \nabla\phi$ for a convex $\phi$ (for the network-free map, $\phi(x) = T \log \sum_t e^{e_t^\top x/T}$), and convexity, $\phi(F(x)) \geq \phi(x) + F(x)^\top (F(x) - x)$, gives for $V(x) = \frac{1}{2}\|x\|^2 - \phi(x)$

$$V(F(x)) \leq V(x) - \tfrac{1}{2}\|F(x) - x\|^2. \tag{4}$$

Each step lowers this energy by at least half the squared length of the step. Along a cycle these decreases sum to zero, so every point of the cycle is fixed. $F$ maps every state into the convex hull of the embeddings, where $V$ is bounded below, so the steps of every orbit must shrink to zero: every accumulation point of an orbit is a fixed point, and the strict descent of the energy rules out cycles and chaotic motion (an unstable fixed point can still have positive tangent exponents). In models with tied embeddings, such as Qwen2.5-0.5B, every cycle and every chaotic cell therefore depends on the network factor $J_{\tilde{h}}$ breaking this energy structure. With untied embeddings the network-free map $x \mapsto E^\top \mathrm{softmax}(Wx/T)$ has the derivative $\mathrm{Cov}_{t\sim p}(e_t, w_t)/T$, which need not be symmetric or positive semidefinite, so the energy argument no longer applies to those models, and cycles become possible even without a network (two tokens whose output vectors point at each other's input embeddings exchange at low temperature). Attention has itself been read as a Hopfield retrieval [35]; in the soft-token map the retrieval closes a loop around the whole network.

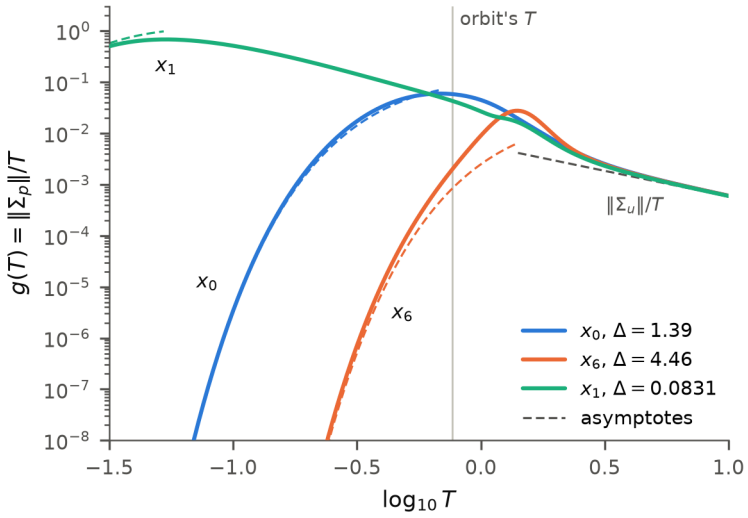


**Figure 4:** Readout gain $g(T) = \|\Sigma_p\|/T$ (spectral norm) at the fixed logits $z_\alpha(x)$ of three states $x_k = F^k(x_0)$ of the period-8 orbit of Table 6 (Qwen2.5-0.5B-Instruct, philosophy direction at layer 12, $\alpha = 0.071674$), with only the temperature in $p = \mathrm{softmax}(z/T)$ varied. $x_0$ is the state at which (3) was checked; $x_6$ and $x_1$ have the largest and the smallest gap $\Delta$ between the two largest logits among the eight states. Dashed: the low-temperature asymptote $\|e_{t_1} - e_{t_2}\|^2 e^{-\Delta/T}/T$ of each state ($t_1$, $t_2$ the two leading tokens), drawn below its peak, and the high-temperature asymptote $\|\Sigma_u\|/T$, with $\Sigma_u$ the covariance of all token embeddings under equal weights. The peaks lie at $\log_{10} T = -1.27$ ($x_1$, $g = 0.68$), $-0.16$ ($x_0$, 0.059) and 0.15 ($x_6$, 0.028); the vertical line marks the orbit's temperature, $\log_{10} T = -0.115$. Where the two leading logits nearly tie ($x_1$), $g$ grows roughly like $1/T$ as $T$ falls toward $\Delta$. This is the readout factor alone: the network factor $J_{\tilde{h}}$ is not included, so $g$ does not decide whether $DF$ expands. At the orbit's temperature $g \leq 0.064$ at all eight states, while the largest singular value of $DF$ lies between 1.2 and 21 (Section 3).

**High and low temperature.** The largest Lyapunov exponent of an orbit, the average rate at which nearby states separate, cannot exceed the long-run average of $\log \|DF\|$ along the orbit, so a positive exponent requires that average to be positive (this gain condition is necessary, not sufficient). Both ends of the temperature axis work against it, in different ways (Figure 4).

At high temperature $1/T$ is small, and the bound is explicit. However the probability is spread, the projections $u^\top e_t$ of the embeddings on any unit vector $u$ lie in an interval no longer than the diameter $\operatorname{diam}(E)$ of the set of embeddings, and Popoviciu's inequality bounds a variance by a quarter of the squared range, so $\|\Sigma_p\| \le \operatorname{diam}(E)^2/4$. With $L(\alpha) = \sup_K \|J_{\tilde{h}_\alpha}\|$, the network's largest gain on the set $K$ of possible states (finite because the Jacobian is continuous and $K$ is compact), $\|DF_{T,\alpha}\| \le \operatorname{diam}(E)^2 L(\alpha)/(4T)$ on $K$, and $F_{T,\alpha}$ shrinks every distance, that is, it is a contraction of $K$, for $T > T_*(\alpha) = \frac{1}{4}\operatorname{diam}(E)^2 L(\alpha)$. Above this temperature the loop forgets where it started: its single fixed point attracts every orbit, and it tends to the mean embedding as $T \to \infty$; without tied embeddings, $\operatorname{diam}(E)^2$ becomes $\operatorname{diam}(E)\operatorname{diam}(W)$. The threshold is a curve in the $(\alpha, T)$ plane, because the largest gain of the network depends on the steering. The bound is rigorous but far from sharp, because it assumes the worst case at every step. With the diameter of the 0.5B model's tied embeddings, $\operatorname{diam}(E) = 1.2109$, computed over all pairs of embeddings, and the largest norms of $J_{\tilde{h}_\alpha}$, the Jacobian of the final normalized hidden state, met along the trajectories of 7936 cells of the two main maps (power-iteration estimates, so lower estimates of $L(\alpha)$), $T_*(\alpha) \ge 2.7 \times 10^3$ at every steering strength sampled in these maps (64 per map), and $T_*(\alpha) \ge 5.6 \times 10^4$ at $\alpha = 0.06$, where the largest norm, $1.54 \times 10^5$, was met ($\log_{10} T_* \ge 3.44$ and $\ge 4.75$): at least 3.1 and 4.4 decades above the highest chaotic temperature of the unsteered sweeps below ($\log_{10} T = 0.28$; `tools/norm_bounds.py`). It does not cover hard routing or a growing context.

At low temperature $1/T$ is large, but one token takes almost all the probability, and $\Sigma_p$ vanishes faster than $1/T$ grows. At a state with a unique leading token $j$, the gain is $\|\Sigma_p\|/T = e^{-\Delta/T}(C + o(1))/T$, where $\Delta$ is the gap between the two largest logits and $C = \|\sum_i (e_i - e_j)(e_i - e_j)^\top\|$, the sum running over the runner-up tokens whose logits trail by exactly $\Delta$. As $T \to 0$, $F$ tends to the greedy map, which feeds back the embedding of the most probable token (at an exact tie, the limit averages the tied embeddings). The limit map takes finitely many values, so every orbit of it eventually repeats (Appendix G). The convergence is pointwise, not uniform: near a tie between tokens with different embeddings the gain is of order $1/T$. At fixed $\alpha$ and small positive temperature, chaos is therefore excluded only on invariant sets that keep a uniform logit gap, $\Delta \ge \Delta_0 > 0$ at every state of the set and for every small $T$; a gap that shrinks with $T$ is not enough. Under that condition $\|\Sigma_p\| \le \operatorname{diam}(E)^2 (V-1) e^{-\Delta_0/T}$, so $\|DF\| \le L(\alpha)\operatorname{diam}(E)^2 (V-1) e^{-\Delta_0/T}/T$, which tends to zero (with tied embeddings; untied ones change only the constant). A chaotic set would have to return to near-ties again and again.

Chaos is therefore found in between, at temperatures where the next-token distribution is spread enough to make $\Sigma_p$ large while $1/T$ still amplifies it, and the unsteered sweeps agree (Figure 80). In the four long sweeps (Appendix J) the chaotic temperatures lie in one band per model, interleaved with periodic windows, and every band lies between $\log_{10} T = -0.20$ and 0.28. This band is an observation; near ties, the low-temperature argument does not exclude chaos. Below the bands, all 1547 temperatures swept have negative exponents, and all but five have a detected period; above them, up to the end of the sweeps at $\log_{10} T = 0.3$, 127 of 128 temperatures have a detected period (fixed points at 101) and one has a negative exponent without one. These are finite sweep findings; the wider sweeps of Section 14 find chaos at higher temperatures in some models, and an OLMo-2-32B sweep found three candidate cells below one nat of entropy (at $\log_{10} T = -0.42$, $-0.41$ and $-0.07$; one twin offset). A further sweep of the unsteered 0.5B map from $\log_{10} T = 0.3$ to 1.5 finds an attracting fixed point at all 25 temperatures. Its entropy approaches $\log V$ (11.928 against

11.931 nats at $\log_{10} T = 1.5$), and its exponent falls steadily, by 2.14 per decade of temperature at the top of the range, toward the slope $-\ln 10 \approx -2.30$ expected once $p$ is uniform.

**Stability belongs to the loop, not to the step.** The gain condition is necessary, not sufficient. Along the period-8 orbit of Table 6, the largest singular value of $DF$ lies between 1.2 and 21 at every step, so every step expands some direction, and no step is close to rank one: the second singular value is at least 0.15 of the first, and the second eigenvalue of $\Sigma_p$ is at least 0.23 of the first (minimum 0.236). Yet the Jacobian of the whole cycle, the product of the eight step Jacobians, has norm between 0.059 and 0.644, depending on the phase at which the cycle is started, against $1.1 \times 10^7$ for the product of the step norms. Its eigenvalues, which do not depend on that phase, reproduce the multipliers of Table 6 (0.01104 and $-2.96 \times 10^{-7}$; the table lists moduli), and its second singular value is $1.7 \times 10^{-6}$ to $2 \times 10^{-4}$ of its first. An independent implementation of the model reproduced the factorization (to $8.3 \times 10^{-14}$), the step singular values, the signed multipliers and the cycle norms at all eight starting phases. The expansion of each step is undone by the steps that follow, and the strongly anisotropic linear return of the stripe orbits is a property of the composed cycle, not of any single step or of the rank of $\Sigma_p$. Nor does the contraction need the actual alignment of the steps: with independent random (Haar) rotations inserted between the eight step Jacobians, all 16 tested products contract, and more strongly than the actual cycle (`tools/alignment_intervention.py`). Stepwise norm or spectral summaries can be inconclusive; the ordered product of the step Jacobians captures the cycle's linear stability. Across the maps the same holds statistically (Figure 5). Along the trajectories of 7936 cells of the two main maps (every fourth cell of the stripes map, except its top four sampled rows, 256 cells that did not run within the time limit, and every eighth of the crossing window; float32; 300 transient and 60 measured steps), the orbit averages of $\log \|DF\|$ and of $\log(\|\Sigma_p\|/T) + \log \|J_{\tilde{h}}\|$ exceed zero in every cell, chaotic or periodic: their medians are 2.98 and 2.57 per step over the chaotic and the periodic cells of the stripes map for $\log \|DF\|$, against a median exponent of 0.30 in its chaotic cells (crossing window: 2.93, 2.62 and 0.17). Single-step norms overstate the growth of their product, because the direction in which one step leaves a perturbation is generally not the direction that the next step stretches most. Averages of $\frac{1}{k} \log \|DF^k\|$ over the disjoint blocks of $k$ consecutive steps that tile the record account for this. With exact norms each such average bounds the growth over the whole record, and it can only fall when the block length doubles; here the medians fall as $k$ grows, although in 176 of the 7936 cells an estimate rises between consecutive block lengths. They begin to separate the regimes only at $k = 4$ and 5; at $k = 5$ they are negative in 27 and 29 % of the periodic cells of the two maps (medians 0.91 and 0.80 over the chaotic cells, 0.25 and 0.22 over the periodic ones). No estimate fell below the tangent exponent of its own 60 measured steps at any $k$ (in 13 cells a $k = 4$ or 5 estimate lies below the map's exponent, which was measured over 300 steps of a separate float64 run), and the norms are power-iteration estimates, which can only fall short, so the true bounds lie higher still; the four cells labeled chaotic by the maps whose $k = 5$ estimate is negative have negative exponents on these shorter trajectories. With exact norms the picture sharpens (Figure 6). At the first 24 of 64 cells fixed in advance (12 labeled chaotic and 12 periodic, from both maps; float64; 32 recorded steps after 1000 transient steps from the fixed start; every norm from the dense step Jacobian; the remaining cells did not fit the compute budget), let $P_{i,k}$ be the product of the $k$ step Jacobians from step $i$ on. The block bounds $B_k = \frac{1}{N} \sum_j \log \|P_{jk,k}\|$, over the $N/k$ disjoint blocks that tile the $N = 32$ recorded steps, satisfy $B_1 \geq B_2 \geq B_4 \geq \cdots \geq B_{32} = \frac{1}{32} \log \|DF^{32}\|$ in every cell, as submultiplicativity requires for nested blocks, and the factorization reproduces $DF$ to $2.0 \times 10^{-12}$. For typical orbits of an invariant measure, the subadditive ergodic theorem [38] guarantees that such bounds close on the largest exponent as the blocks grow, but it gives no rate

and no guarantee for a finite record; the agreement below between finite windows of the recorded orbit and the later exponent is empirical. Here their median overshoot of the exponent measured over the next 2000 steps falls from 2.72 per step at $k = 1$ to 0.32 at $k = 8$ and 0.036 at $k = 32$ over the chaotic cells (periodic cells: 2.86, 0.45 and 0.12), approximately as $1/k$ in this sample: for $k = 1, 2, 4, \ldots, 32$, $k$ times the median overshoot runs from 1.14 to 2.96 over the chaotic cells and from 2.86 to 3.92 over the periodic ones. The sign of $B_k$ agrees with the sign of that exponent in 13 of the 24 cells for $k = 1$, 2 and 4 and in 22 at $k = 16$. Averages of $\frac{1}{k} \log \|P_{i,k}\|$ over the overlapping windows of the record can be formed for every length $k$, but they are finite-window diagnostics, not bounds on the whole record or on the later exponent. Their sign agrees with that of the exponent in 23 cells for every window length from 17 to 29 steps and in all 24 at 30 steps. From 17 to 29 steps the one disagreement is a cell that the map labels periodic, with an exponent of $-0.146$ over the 2000 later steps, whose window average falls from $+0.112$ to $+0.011$ but stays positive. At 31 and 32 steps, where only two windows and one window fit, it and another periodic cell again have small positive values (0.019 and 0.035 at 32 steps, where the single window gives $B_{32}$). A further cell, which the map labels periodic, has an exponent of $+0.124$ over the 2000 later steps; its bounds and window averages agree with that exponent and disagree only with the map's label. The factorized bound loses a further 2.9 per step (median) to the misalignment of the readout and network factors. The factorized inequalities and short blocks do not locate the chaos. In these 24 cells, windows of about twenty steps of the model's own loop recover the sign of the long-run exponent, but as a measurement along the recorded orbit, not as a forecast from the weights.

**Steering makes tokens compete.** Steering could create chaos through either factor of (3), as described above: it moves the logits, and with them which tokens compete in $\Sigma_p$, and it moves the hidden states, and with them the network's response $J_{\tilde{h}}$. Three measurements on Qwen2.5-0.5B, steered along the philosophy direction, tell the two apart (Figure 7; details in Figure 8 and Table 2). First, an accounting. Each step's growth splits exactly into a network factor $g_{\text{net}} = (|\delta\tilde{h}|/|\tilde{h}|)/(|\delta x|/|x|)$, how much the transformer stretches a relative change of its input, and a readout factor $g_{\text{read}} = (|\delta F|/|F|)/(|\delta\tilde{h}|/|\tilde{h}|)$, how much the softmax and the averaging of embeddings stretch it on the way out. For a tangent perturbation followed over $n$ steps, their mean logarithms add up to its finite-time growth rate plus a boundary term, $(\log\|x_0\| - \log\|x_n\|)/n$; both are relative gains along the orbit, not operator norms. The split depends on how the intermediate state is measured, so only the sum is intrinsic; we compare each factor between cells within this one convention. Over a $101 \times 53$ map in steering strength and temperature (block 12; 5353 cells, 331 chaotic), the chaotic cells' readout factor exceeds that of nearly unsteered cells ($|\alpha| \leq 0.01$) at the same temperature by 2.58 nats per step (95 % interval $[1.78, 3.59]$ over 18 temperature rows; 321 chaotic and 162 nearly unsteered cells). Their network factor differs by only $-0.07$ $[-0.23, 0.12]$. With nearly no steering the readout's relative gain shrinks perturbations strongly, by 0.87 to 5.49 nats per step. In the chaotic cells it grows them, except in the three highest temperature rows ($\log_{10} T = 0.175$–$0.225$), where it still shrinks them, but less. Compared with periodic cells at the same temperature, chaotic cells have a higher next-token entropy ($+1.62$ nats, $[1.26, 1.91]$), a smaller gap between the two largest logits ($-1.37$ in units of $T$, $[-1.98, -0.87]$) and a larger readout factor ($+1.36$, $[0.91, 1.93]$), each with $p \leq 10^{-4}$ in a permutation test within temperature rows: more tokens compete.

Second, a test that leaves the network unsteered. We add to the logits a bias $\beta\, b$ along $Wv$, the output matrix applied to the steering vector (a logit-space stand-in for the steering; $b$ is centered and scaled to unit standard deviation over the vocabulary), with no residual steering. At a given state this changes only the output probabilities, although the orbit it produces can visit different

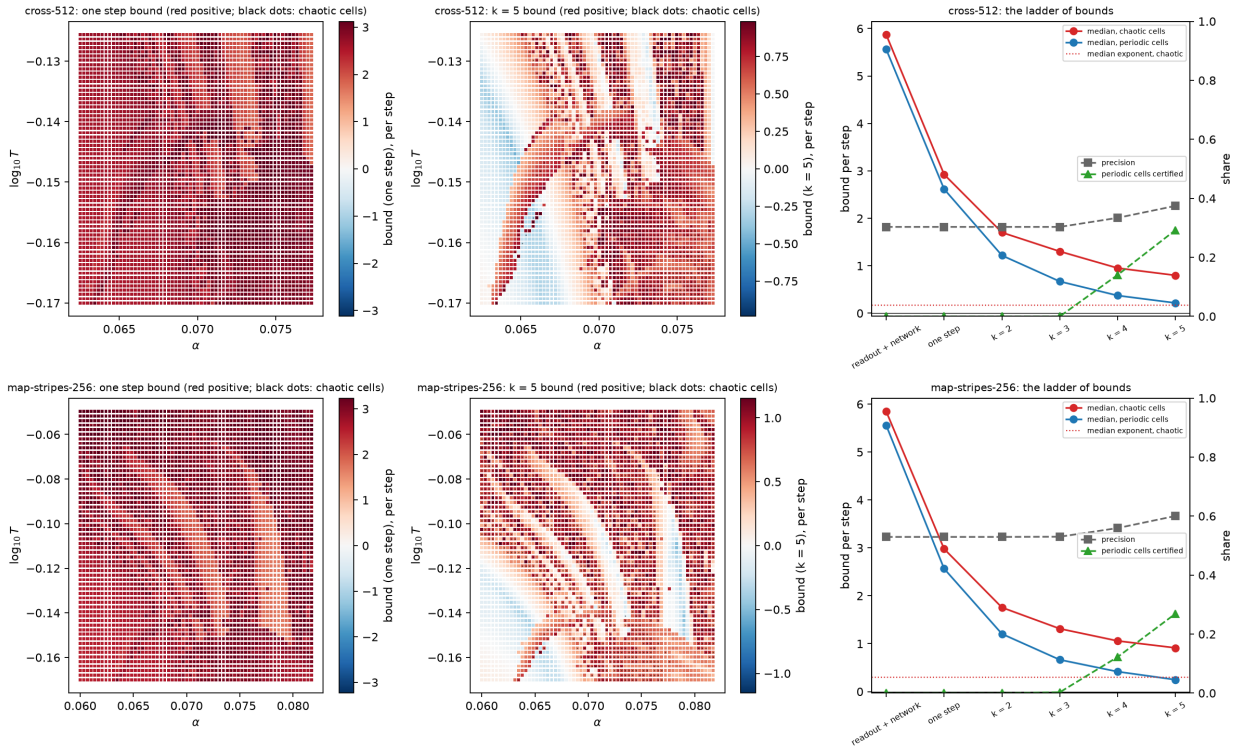


**Figure 5:** Norm bounds of the factorized derivative along the model's own orbits (Qwen2.5-0.5B-Instruct, philosophy direction at layer 12, float32; every eighth cell of the crossing window of Figure 11, top, and every fourth cell of the stripes map except its top four sampled rows, which did not run, bottom; 300 transient and 60 measured steps; `tools/norm_bounds.py`, `tools/plot_norm_bounds.py`). Left: the orbit average of $\log \|DF\|$ per step (red: positive). Middle: the average of $\frac{1}{5} \log \|DF^5\|$ over blocks of five steps; black dots: cells the map labels chaotic. Right: medians of each bound over chaotic (red) and periodic (blue) cells, the median exponent of the chaotic cells (dotted), the share of cells with a positive bound that are chaotic (precision), and the share of periodic cells whose bound is negative.

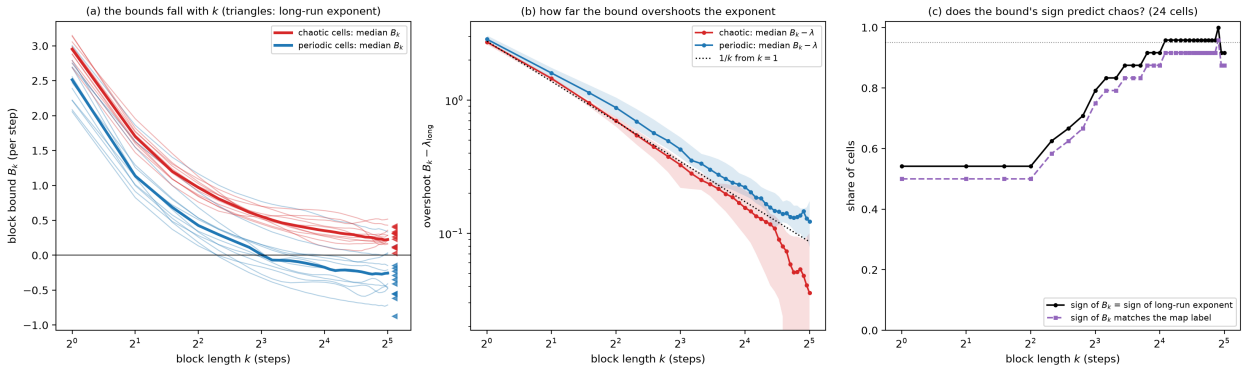


**Figure 6:** The bound hierarchy with exact norms (Qwen2.5-0.5B-Instruct, philosophy direction at layer 12, float64; 24 cells, 12 labeled chaotic by the maps, red, and 12 periodic, blue; 32 recorded steps; `tools/bound_hierarchy.py`, `tools/analyze_bh.py`). The panels plot, for every length $k$ from 1 to 32, the average of $\frac{1}{k}\log\|P\|$ over the overlapping windows of $k$ steps (labeled $B_k$ in the panels); it equals the disjoint-block bound $B_k$ of the text at $k = 1$ and 32, and for other $k$ it is a finite-window diagnostic, not a bound. (a) This average against $k$ for every cell (thin lines; thick: medians), with each cell's exponent over the next 2000 steps (triangles). (b) Its median overshoot over that exponent $\lambda$, with the interquartile range, against $1/k$ from $k = 1$ (dotted). (c) The share of cells whose sign of the average agrees with the sign of the long-run exponent (black) and with the map's label (purple); dotted: 95 %.

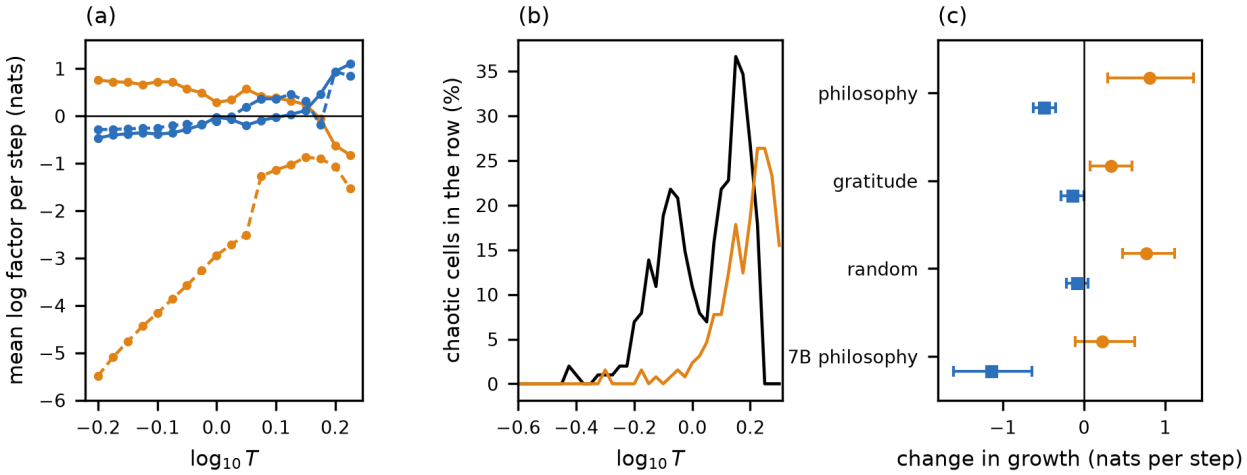


**Figure 7:** Readout and network contributions to the growth under steering: the three measurements of this section (Qwen2.5-0.5B-Instruct unless marked 7B, float64). Orange: the readout factor $\Sigma_p/T$ of (3); blue: the network factor $J_{\tilde{h}}$. (a) Gain split along the attractors of the block-12 map: mean logarithm of each factor per step, for chaotic cells (solid) and nearly unsteered cells, $|\alpha| \le 0.01$ (dashed), in the 18 temperature rows with at least three cells of each kind; positive values expand perturbations, negative values contract them. In the nearly unsteered cells the readout's relative gain shrinks perturbations by 0.87 to 5.49 nats per step; in the chaotic cells it grows them, except in the three highest rows, while the network factor changes little. (b) Share of chaotic cells per temperature row under residual steering at block 12, which moves both factors (black; 331 of 5353 cells, 6.2 %), and under a logit bias along $Wv$, the output matrix applied to the steering vector, with no residual steering, which at a given state changes only the readout (orange; 241 of 6837 cells, 3.5 %). (c) Orbit-preserving crossover: change in the finite-time growth along recorded steered orbits when only the readout (orange, circles) or only the network Jacobian (blue, squares) is taken from the steered model; means over the held-out chaotic cells with 95 % bootstrap intervals. Rows: the philosophy and gratitude directions and a random direction of the philosophy vector's norm in the 0.5B model, 14 cells each, and the philosophy direction in the 7B model, 10 cells. `tools/plot_mechanism_summary.py`.

states. On its grid, 3.5 % of cells were chaotic (241 of 6837), mostly at $\log_{10} T > 0.1$, against 6.2 % on the residual-steering grid (331 of 5353). A change of the output probabilities alone, with the network unsteered, therefore suffices for chaotic cells in part of the plane.

Third, a gain split compares different orbits, so steering could act simply by moving the orbit to other states. A crossover at fixed states separates the two contributions along the recorded orbits. Along recorded steered orbits we evaluated the steered and the unsteered model at the same states and carried four tangent dynamics. Each pairs the steered or unsteered readout $R(p)$ with the steered or unsteered network Jacobian: arms 11, 10, 01 and 00. The hybrid arms 10 and 01 are not derivatives of any actual map; they apportion the growth along the recorded orbits. The frozen validation (arm 11 within 0.02 of the twin exponent at every cell) holds at 23 of 24 cells, all within 0.012; at the remaining periodic cell, which contracts at about $-12$ per step, the twin offset falls to the rounding floor. The frozen sufficiency criterion (arm 10 within 0.1 of arm 11 on average) fails by overshoot: steering only the readout gives more growth than the full steered map, by 0.23, because steering's change of the network damps it. Over 14 held-out chaotic cells, the steered readout factor with the unsteered network factor (steering only the readout) raises the finite-time growth by 0.81 nats per step ($[0.29, 1.35]$). The steered network factor with the unsteered readout (steering only the network response) lowers it by 0.49 ($[-0.63, -0.35]$). The interaction is $+0.26$ ($[0.09, 0.45]$). Below $\log_{10} T = 0$ the steered readout turns the contraction of the unsteered derivative ($-1.03$ nats per step) into growth ($+0.72$), more than the full steered map shows ($+0.34$). Above it, the unsteered derivative already expands at the steered states ($+0.41$), and steering may act by bringing the orbit there. In Qwen2.5-7B, whose embeddings are untied, the same crossover (18 cells of its steered map at block 14; arm 11 equals the twin exponent within $10^{-4}$ at every cell) reproduces the damping. Over its 10 held-out chaotic cells, steering only the network response lowers the growth by 1.14 nats per step ($[-1.61, -0.64]$), and steering only the readout adds $+0.23$ ($[-0.11, 0.63]$). Eight of the ten lie at $\log_{10} T \geq 0$, where the unsteered derivative already expands at the steered states (mean $+1.33$). The crossover along two more directions of the 0.5B model gives the same signs. For gratitude the readout effect is $+0.33$ ($[0.07, 0.59]$) and the network effect $-0.14$ ($[-0.29, 0.01]$). For a random direction matched in norm to the philosophy vector, they are $+0.77$ ($[0.47, 1.12]$) and $-0.09$ ($[-0.22, 0.06]$); 14 held-out chaotic cells each. The readout effect is positive along all three directions, and the network effect is negative but compatible with zero along these two. In these three directions the readout effect does not depend on the direction's meaning.

All three point the same way: along the recorded orbits of Qwen2.5-0.5B, the growth that steering adds comes mainly from the readout, where next tokens compete; the readout's relative gain turns from shrinking to growing, while the network factor changes little. At low temperature steering creates that competition at fixed states. At higher temperature the orbit lies in states that are already competitive, consistent with steering having carried it there. Along the philosophy direction, in both models, its change of the network's response damps the growth. These are conditional comparisons on recorded trajectories: they do not single out the higher entropy as the cause or show that the readout change alone would sustain the same attractor, and the readout gain stays shrinking in the three highest temperature rows of the gain split. The readout rule holds below $\log_{10} T \approx 0.1$; at higher temperature the network factor itself can expand. Steered at block 4, the chaotic cells at $\log_{10} T = 0.15$ have a network factor of $+0.72$ and a contracting readout ($-0.35$). Along a line of the hostility-steered map (Section 10) at $\log_{10} T = 0.12$–$0.13$ the network factor of the chaotic cells is $+0.60$ against $+0.24$ to $+0.38$ at the neighboring periodic cells. The mechanism is not specific to concept-labeled directions. This is consistent with the controls of Appendix J, in which norm-matched random directions also produce chaos in the 0.5B and 8B models, and rotating the steering direction at constant norm moves the chaotic regions but keeps the chaotic share between 13 and 24 % at every one of 103 angles (Figure 9); at 70B the directions

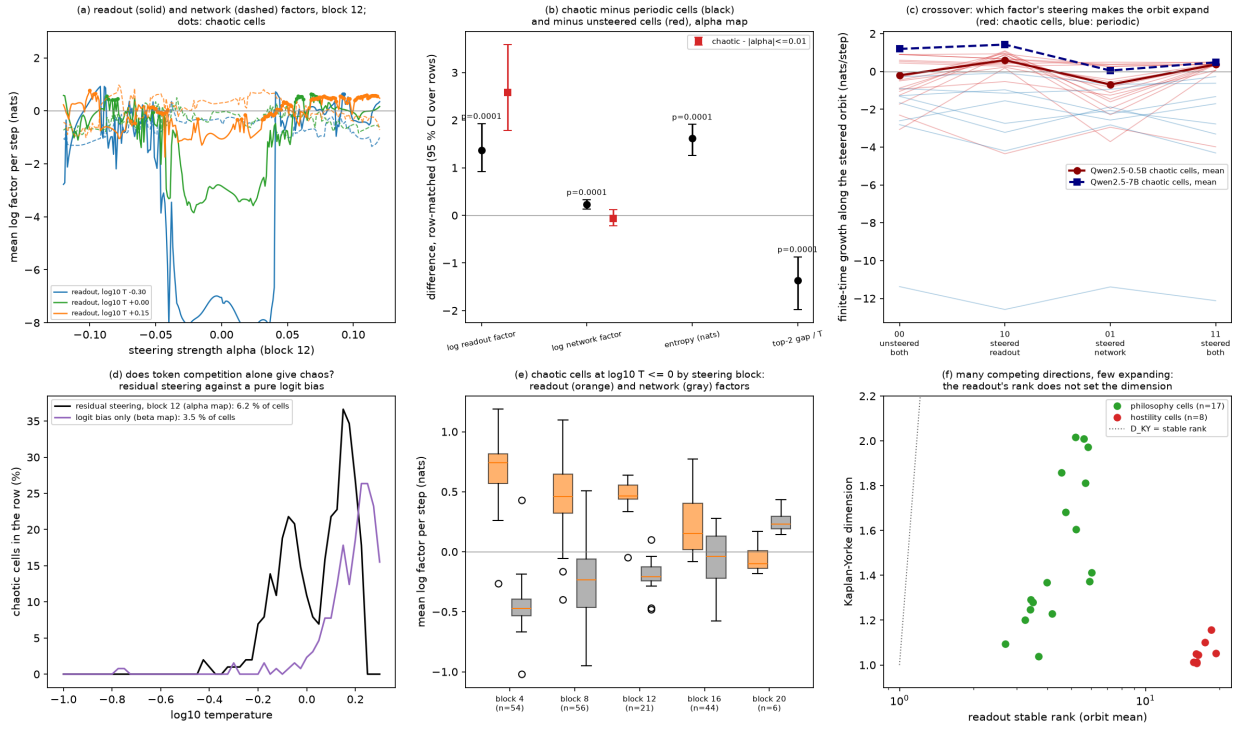


**Figure 8:** Readout and network contributions to the growth under steering, in detail (Qwen2.5-0.5B-Instruct, philosophy direction, float64). (a) Readout factor (solid) and network factor (dotted) along steering lines at block 12, at five temperatures; dots mark chaotic cells. (b) Row-matched differences between chaotic and periodic cells (black) and between chaotic and nearly unsteered cells (red) on the $101 \times 53$ map, with 95 % bootstrap intervals over temperature rows and permutation $p$-values. (c) Orbit-preserving crossover: finite-time growth along each recorded steered orbit when the readout and the network Jacobian are taken from the unsteered (0) or steered (1) model (the hybrid arms apportion the growth; they are not derivatives of any actual map); red, chaotic cells; blue, periodic cells; dark red, the mean over held-out chaotic cells; navy, the same mean in Qwen2.5-7B. (d) Share of chaotic cells per temperature under residual steering at block 12 and under a pure logit bias along $Wv$. (e) The two factors of the chaotic cells by steering block, at $\log_{10} T \leq 0$. (f) Kaplan–Yorke dimension against the readout's trace-to-leading-eigenvalue ratio at the chaotic cells of the dimension measurement (Appendix C); dotted, equality.

differ (Appendix I). What a direction does select is which tokens compete, and therefore what the attractors write.

**Why low-dimensional structure can appear.** Near a bifurcation of a periodic orbit the center manifold theorem reduces the local dynamics to the critical directions, so the normal forms of folds, flips and cusps, the leading terms of that reduction, apply in any dimension. Near most orbits we computed the non-critical multipliers are small, from about 0.1 at short periods to below $10^{-13}$ along the cascade. This transverse contraction motivates scalar descriptions of whole attractors, which need additional, global evidence; where the next multiplier is not small (up to 0.4 along the period-5 curves of Section 11, and 0.28 and 0.38 in a high-temperature bubble of Section 9), such a description is only a rough guide. Coexisting attracting orbits constrain such descriptions: in a smooth unimodal interval map with negative Schwarzian derivative, the immediate basin of every attracting periodic orbit contains the turning point or an endpoint, so at most one attracting periodic orbit avoids the endpoints [39], and coexistence calls for a second turning point, a stretch

| measurement | contrast | estimate (95 % interval) |
|---|---|---|
| gain split, 101 × 53 map | readout factor, chaotic − $\lvert\alpha\rvert \le 0.01$ | +2.58 [1.78, 3.59] nats/step |
| | network factor, chaotic − $\lvert\alpha\rvert \le 0.01$ | −0.07 [−0.23, 0.12] nats/step |
| | entropy, chaotic − periodic | +1.62 [1.26, 1.91] nats |
| | top-2 logit gap/$T$, chaotic − periodic | −1.37 [−1.98, −0.87] |
| logit bias only, $\alpha = 0$ | chaotic share | 3.5 % (241 of 6837 cells) |
| residual steering, block 12 | chaotic share | 6.2 % (331 of 5353 cells) |
| crossover, 0.5B, 14 cells | readout effect, arm 10 − arm 00 | +0.81 [0.29, 1.35] nats/step |
| | network effect, arm 01 − arm 00 | −0.49 [−0.63, −0.35] nats/step |
| | interaction | +0.26 [0.09, 0.45] nats/step |
| crossover, gratitude | readout effect | +0.33 [0.07, 0.59] nats/step |
| | network effect | −0.14 [−0.29, 0.01] nats/step |
| crossover, random dir. | readout effect | +0.77 [0.47, 1.12] nats/step |
| | network effect | −0.09 [−0.22, 0.06] nats/step |
| crossover, 7B, 10 cells | readout effect | +0.23 [−0.11, 0.63] nats/step |
| | network effect | −1.14 [−1.61, −0.64] nats/step |

**Table 2:** Readout and network contributions to the growth under steering (Qwen2.5-0.5B unless marked 7B, Qwen2.5-7B). Intervals: bootstrap over temperature rows (gain split) or over held-out cells (crossover). Runs MECH and XO; `tools/steer_gain.py`, `tools/crossover.py`, `tools/plot_mechanism.py`.

of positive Schwarzian derivative or a second dimension (Appendix C).

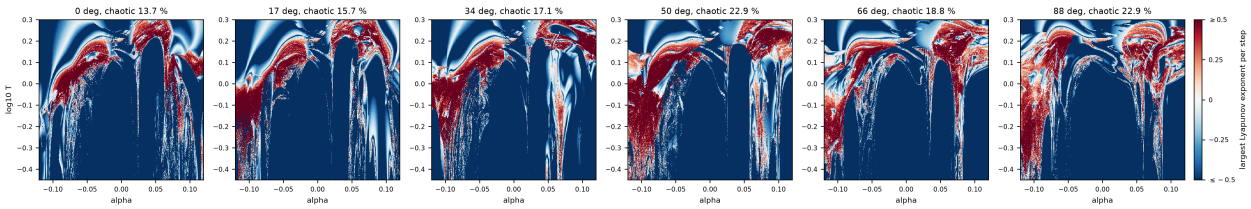


**Figure 9:** The soft-token map of Qwen2.5-0.5B-Instruct (steering at layer 12) while the steering direction rotates at constant norm from one Gaussian direction (0°) to another (90°): largest Lyapunov exponent (color bar; clipped at ±0.5, red positive) at six of 103 angles, with the chaotic share. Float32 maps of 296 × 512 cells over $\alpha \in [-0.12, 0.12]$, $\log_{10} T \in [-0.45, 0.3]$; exponents from 80 measured steps at twin offset $10^{-4}$; each map continues from the final states of the previous angle after 40 steps, and every tenth starts from the fixed start after 300 steps. Where attractors coexist, continued and fresh starts can reach different ones, so the maps, and the rotation video, can jump at every tenth angle and across the 17 of 120 planned angles that did not finish within the run limit. These short-horizon labels are coarser than those of the float64 maps.

## 4 Methods in brief

Results on the soft-token map labeled float64 are computed in float64, including the normalizations and rotary tables that the library would otherwise compute in float32; two exceptions, float32 storage of some diagnostic step records and a float32 final normalization in the two-GPU runs of 70B-class models before 14 October, are marked where they occur (Appendix B and Section 14). A cell of a phase map is chaotic when the largest finite-horizon Lyapunov exponent of a twin trajectory (offset $10^{-6}$, renormalized every step; 300 measured steps after 300 transient ones unless stated) exceeds $10^{-3}$ and no period up to 32 (48 in later zooms) is found; at 448 checked cells automatic-differentiation tangents reproduce the twin exponents within 0.0041, and the label is a finite-horizon diagnostic, not a proof. The twin starts from a random direction in 896 dimensions at the end of the transient, so the averaging window includes its alignment, so the finite-window estimate of a periodic cell differs from $\ln|\mu_1|/p$ of its orbit, by amounts consistent with that transient (its contribution has not been isolated): at two adjacent cells inside the kite of Figure 32, the map gives $-0.2786$ and $-0.0885$ per step and the Newton-converged period-6 orbits $-0.2821$ and $-0.0813$, offsets of $+0.0035$ and $-0.0073$ (`tools/kite_basin_check.py`). Periodic cells are classified by their period, not by this exponent; the gray scale of the maps carries the offset. In random samples of 192 chaos-labeled cells from each of the two main float64 maps (Figures 10 and 1), 176 and 143 cells were never captured by a periodic orbit in $10^5$ steps and all but one kept a positive exponent; the others were long transients that ended on periodic orbits after 600 to 97,500 steps [40]. Chaotic shares of a map are therefore finite-horizon shares of its window. In a simplified noise-floor model, numerical noise of relative size $\sigma$ in a measured difference can produce a spurious positive twin exponent, approximately $\max\{\lambda, \log(\sqrt{2}\,\sigma/\varepsilon)\}$ at offset $\varepsilon$: below the noise level the estimate rises as the offset shrinks, while a real exponent does not depend on the offset (Appendix B, Figure 54). Rounding can also suppress separation or change the sampled dynamics, so the labels are checked by comparing twin offsets and automatic-differentiation tangents rather than by using this approximation as a one-sided guarantee. Periodic orbits are solved by Newton's method with forward-mode derivatives; branches are continued by pseudo-arclength continuation and fold and flip curves by minimally augmented systems [41, 42]; cusps and other codimension-two points are located by bracketing sign changes along the curves; and the normal forms of folds are computed from the network's derivatives without fitting. Appendix B gives the details and the checks on maps with known answers.

## 5 Chaos with periodic windows

Figure 10 shows a $256 \times 256$ float64 map over $\alpha \in [0.060, 0.082]$ and $\log_{10} T \in [-0.17, -0.04]$. More than half of its cells (35,650 of 65,536) meet the finite-horizon criterion, and 92 % of a random sample of them stay chaotic for $10^5$ steps, and periodic windows of periods 2–32 are embedded in the chaos. Inside each window the gray darkens toward curves on which the periodic orbit is most strongly attracting (Section 11).

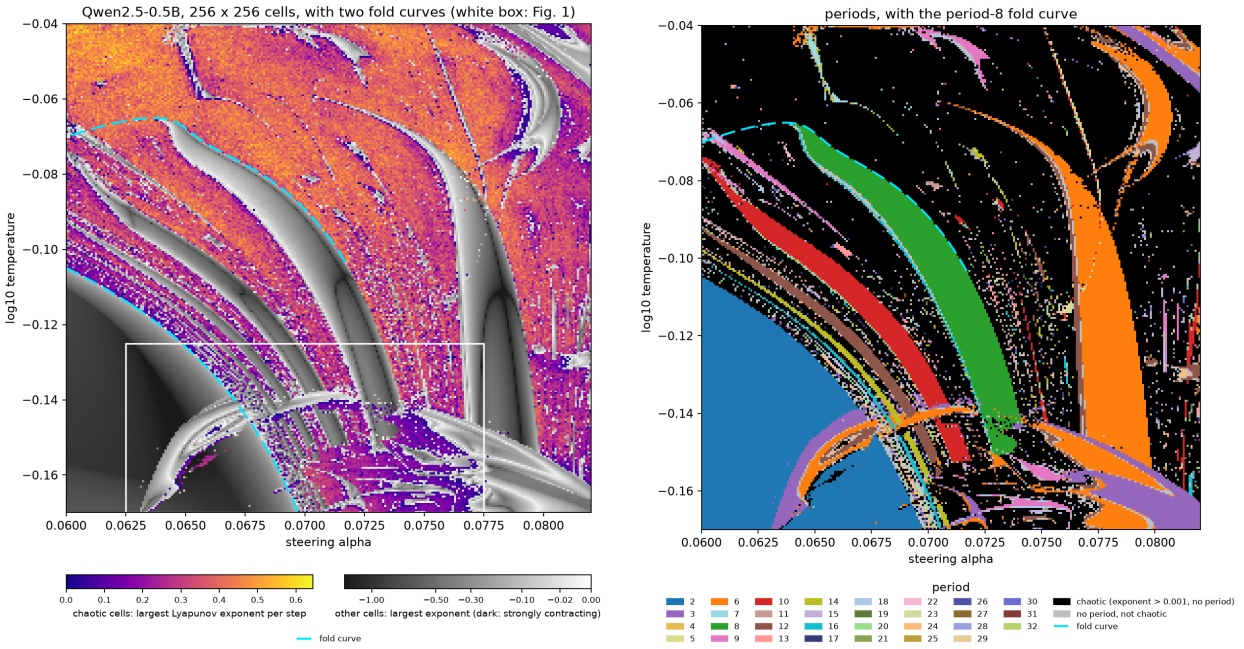


**Figure 10:** Soft-token map of Qwen2.5-0.5B-Instruct steered along the philosophy direction at layer 12, $256^2$ float64 cells. Left: chaotic cells colored by the largest Lyapunov exponent, the other cells in gray by how strongly they contract (light gray: close to losing stability; color bars as in Figure 1). Cyan dashed curves are float64 fold curves of the 2-cycle "is it" (lower left, the boundary on which the stripes accumulate) and of the period-8 orbit (top). Right: periods, with the period-8 fold curve (Appendix E).

Figure 1 resolves the stripes' lower ends at $512 \times 512$ cells, of which 78,868 (30 %) meet the criterion; 74 % of a random sample of these stay chaotic for $10^5$ steps, and the share hardly depends on the resolution (30.0 % at $256 \times 256$), and Figure 11 labels the same cells by their attractor texts. Three structures stand out. The 2-cycle "is it" fills the left, bounded by its fold curve, on which the stripes accumulate. A closed crescent of the period-3 loop "\n\nThe existence" contains its period doublings and a chaotic core (Section 9). Its continuation, the period-6 band "\n\nThe question\n\nThe existence", crosses the stripes near $\log_{10} T = -0.14$, and where the crescent lies on the 2-cycle's side of that fold curve, the two attractors coexist. The lower right is a chaotic region filled with small hooked windows of "\n\nThe question" and "\n\nThe existence" loops.

These names are what the loops write. A period-3 orbit returns to the same soft state every three steps, and at its three states the most probable next tokens are "\n\n" (a blank line, one token), "The" and " existence", with probabilities 0.74, 0.36 and 0.21 at $\alpha = 0.0642$, $\log_{10} T = -0.156$. Read greedily, the loop writes "The existence" paragraph after paragraph; what it feeds back at each step, however, is the probability-weighted average of all token embeddings, not that token. Coexistence is just as concrete. At that same point the loop started from a state of the "is it" 2-cycle (taken from its attractor at $\alpha = 0.0655$) stays on the 2-cycle and writes " is it is it…" (most probable tokens with probabilities 0.66 and 0.29; 300-step exponent $-1.19$), while from the fixed start it settles on the period-3 loop (exponent $-0.13$). At $\alpha = 0.0652$ the fixed start reaches the crescent's chaotic attractor, whose text alternates irregularly between "The question" and "The existence" paragraphs (exponent $+0.095$), and the 2-cycle start again writes " is it" ($-1.29$): one model, one steering vector and one temperature, and the text written after the transient depends on where the loop starts (`tools/coexist_texts.py`, float64).

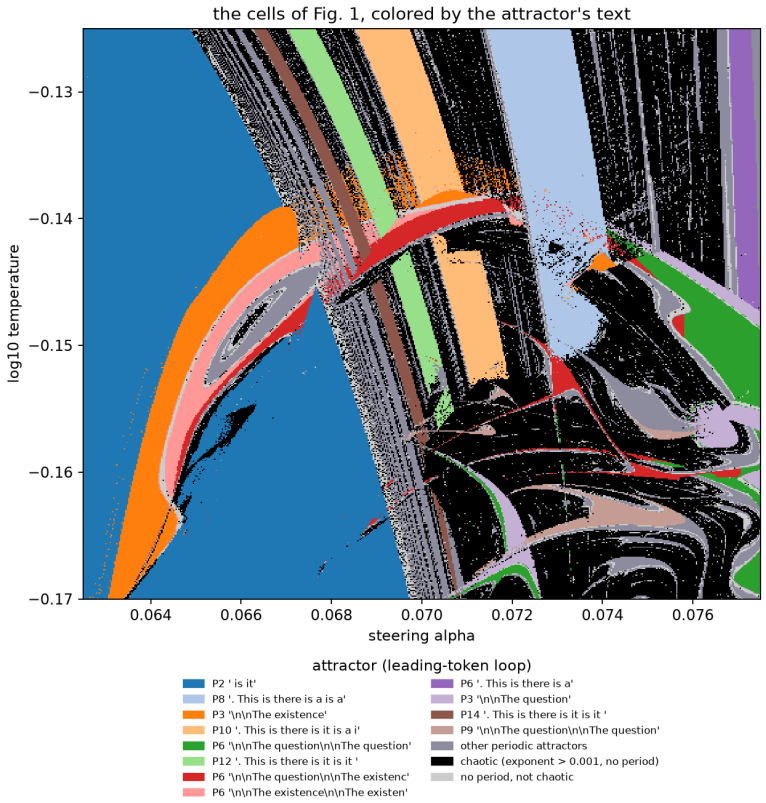


**Figure 11:** The cells of Figure 1 (Qwen2.5-0.5B-Instruct, philosophy direction at layer 12; $512^2$ float64 cells over $\alpha \in [0.0625, 0.0775]$, $\log_{10} T \in [-0.17, -0.125]$), colored by the attractor's leading-token loop (black: chaotic by the criterion of Appendix B; gray: no period up to 32 and not chaotic; bluish gray: other periodic attractors). Figure 1 shows the largest Lyapunov exponent of the same cells.

Zooms of $256^2$ cells (Figure 12) show what the model writes in each window, and every window is a repeating piece of text. The period-8 band repeats ". This is there is a is a". The neighboring bands add laps of "is it" (periods 10 and 12), and along the band's flip edge the period-16 loop repeats the sentence twice. The small windows inside the chaos break the "is X" chain with a paragraph break and "The" (periods 11, 12, 13, 14). Inside the period-8 and period-6 bands, two curves of maximal contraction meet in a sharp junction.

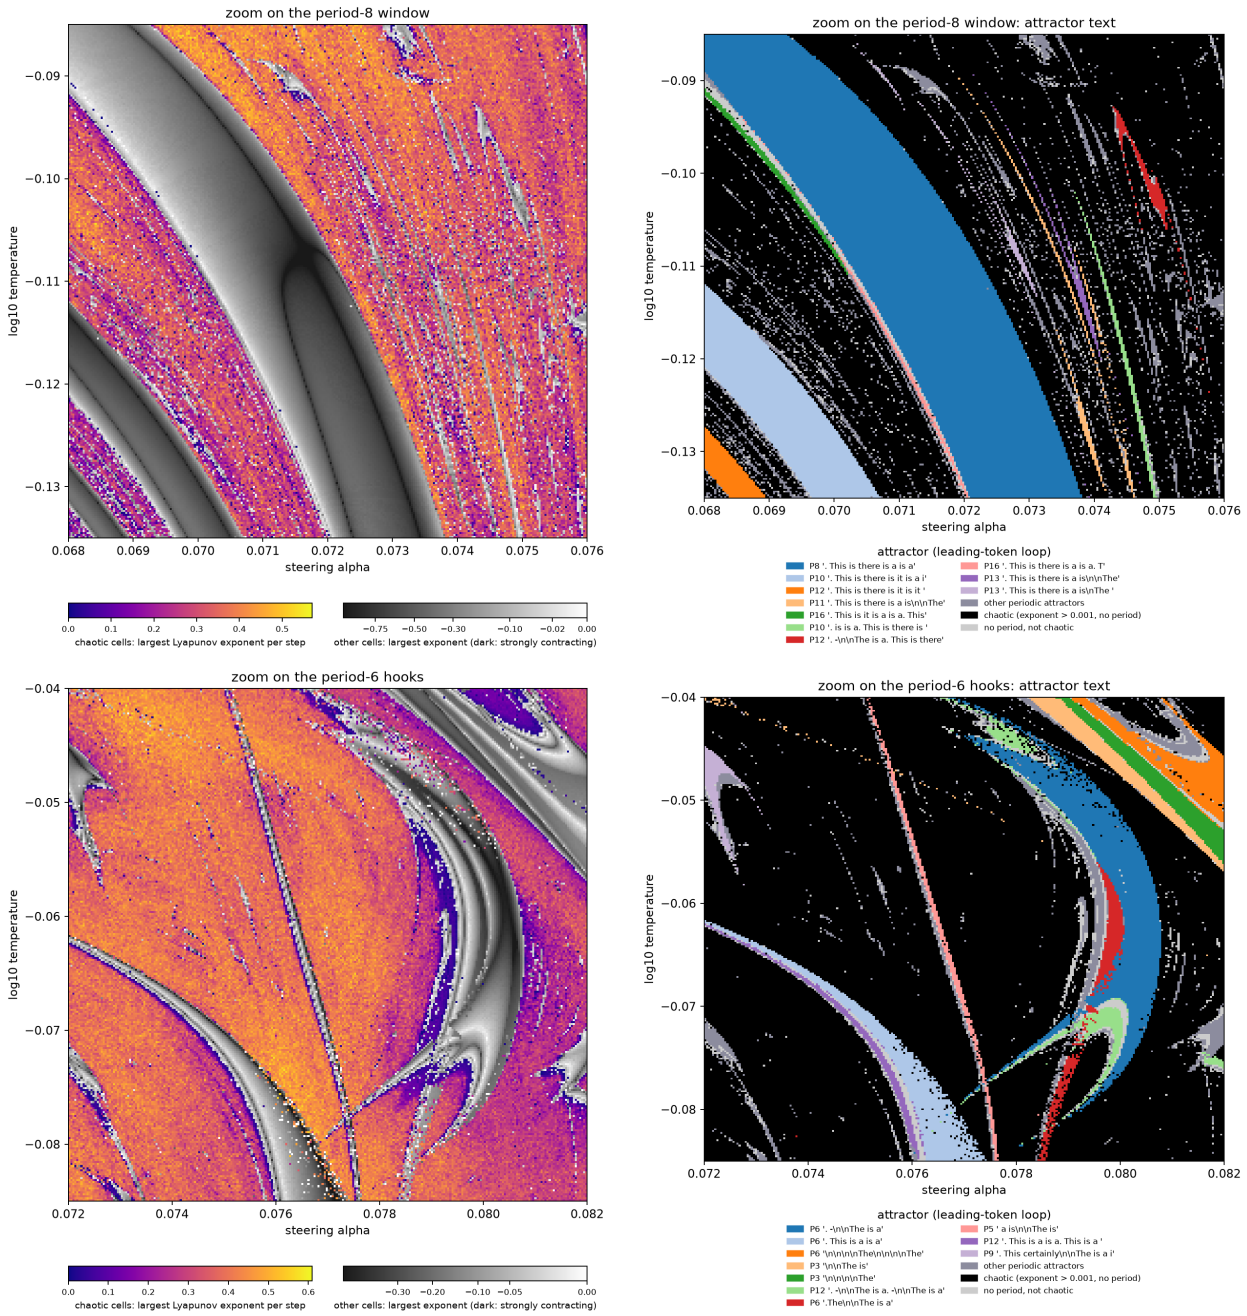


**Figure 12:** Zooms of $256^2$ float64 cells of the Qwen2.5-0.5B-Instruct map (philosophy direction, layer 12), with the largest Lyapunov exponent on the left, colored as in Figure 1, and attractor texts on the right. Top: the period-8 window ($\alpha \in [0.068, 0.076]$, $\log_{10} T \in [-0.135, -0.085]$). Bottom: the period-6 hooks ($\alpha \in [0.072, 0.082]$, $\log_{10} T \in [-0.085, -0.04]$), whose curved period-6 body, period-12 foot and thin leg are analyzed in Appendix E.

**What a chaotic loop writes.** The chaotic cells write text too (Table 3). Their text reuses the words and phrases of the neighboring loops without settling into an order, and it depends on the state to precisions far below rounding. To show the second property in words, we ran the loop at cells labeled chaotic for 1000 steps in float64. We then recorded it together with a copy started at a relative distance of $10^{-10}$, about 600 times smaller than the relative rounding error of float32.

The copy is never reset. Its distance from the loop grows at about the rate the cell's Lyapunov exponent sets, faster or slower over finite stretches (Figure 15). The two write the same text until the distance has grown to between 1.27 % and 176 % of the soft token's norm, and different texts afterwards. In Qwen2.5-0.5B, two cells steered along philosophy, with exponents 0.44 and 0.36, split at steps 44 and 51, and a cell steered along hostility, with exponent 0.35, at step 45. By then the distance had grown by 8.5 to 10.2 decades. The splits come where no token dominates. At each of the seven splits we recorded, in this model and in Qwen2.5-1.5B below, the loop's most probable token has a probability of at most 0.31 and leads the next by at most 0.08, and at five of them the copy writes the loop's second choice. At step 44 of the cell with exponent 0.44, a blank line and " is" have probabilities 0.139 and 0.135; at step 45 of the hostility cell, "Yes" and "No" have 0.303 and 0.298, and the copy writes "No".

The texts show where the chaos lives. Next to the period-3 crescent, where the exponent is only 0.10, the loop keeps the skeleton of the period-3 text, a blank line, "The" and a noun, and only the noun varies, between " existence" and " question", whose probabilities come within 0.0025 of each other; there the texts split at step 151. On the hostility plane (Section 10), the chaotic cell lies between windows whose loops write "!Yes!Yes, that's crap!Yeah" and "!No, that's crap!Yeah!Yes!Yes". It repeats "!Yes" and inserts ", nonsense", ", that" and "!No, that" at irregular intervals. In Qwen2.5-1.5B steered along philosophy, two chaotic cells (exponents 0.83 and 0.80) write short questions separated by line breaks, "What?", "What? Or" and "In". Their copies split at steps 22 and 10; at step 10, "What" and "In" have probabilities 0.091 and 0.090. Finite stretches can expand much faster than the average: that copy's distance grew a hundredfold in its first step. Without steering, at $\log_{10} T = 0.657$, the next-token distribution is nearly uniform, and in the recorded steps the most probable token never exceeds a probability of 0.001. There the chaotic loop (exponent 0.59) writes runs of exclamation marks, in ASCII and in full width, commas, the end-of-turn marker and the Chinese 一下 ("a bit"), and its copy splits at step 43.

The text is fragile to the computation itself. We recorded the cell next to the crescent twice in float64 on the same processor, once with six threads and once with four, which changes the order of floating-point sums. During the 1000-step transient the chaos had already amplified that difference, so the two recordings started from slightly different states; they wrote the same text for 27 steps and different texts from step 28 on. At 70B the chaotic cells of Figure 49 draw on the words of the unsteered model's fifteen-token loop (Section 14): the first eight distinct leading tokens of one chaotic cell confirmed at three twin offsets are " I", "The", "!", " It", " infinite", " possibilities", " are" and " you" (17 distinct tokens in 300 steps).

**What the attractors look like.** The numerically observed attractors can be drawn. At the cell of strongest chaos on the row $\log_{10} T = -0.148$ of Figure 1 ($\alpha = 0.07248$), 512 trajectories started near the fixed start and recorded for 600 steps after 400 transient steps (float64) approach, all but 14 of them, one numerically observed chaotic attractor; the other 14 reach a coexisting period-4 orbit. Projected on the first two principal axes of its states (61.6 % of the variance; 77.4 % with the third), it shows thin folded filaments, colored by the most probable next token, and successive magnifications show layers within layers (Figure 13). The loop is a map, not a flow: one step is one pass through the network, and a typical step moves the state by 0.30 in all 896 dimensions, more than the mean distance (0.21) of the states from their center, so consecutive states of one trajectory usually lie far apart on the attractor rather than along one filament. The four leading Lyapunov exponents (QR iteration, 3000 steps) are 0.274, −1.052, −1.486 and −1.856 per step, so the Lyapunov (Kaplan–Yorke) dimension estimate is $D_{\mathrm{KY}} = 1.26$, a quantity of the exponents rather than a measured fractal dimension. The correlation sum gives no dimension: its local slope

| | |
|---|---|
| Qwen2.5-0.5B, philosophy, $\alpha = 0.0652$, $\log_{10} T = -0.156$: $\lambda = 0.10$, texts split at step 151 | |
| loop | ↩↩The question↩↩The existence↩↩The existence↩↩The existence↩↩The ‖ existence↩↩The existence↩↩The existence↩↩The existence |
| copy | ↩↩The question↩↩The existence↩↩The existence↩↩The existence↩↩The ‖ question↩↩The existence↩↩The question↩↩The existence |
| Qwen2.5-0.5B, philosophy, $\alpha = 0.07484$, $\log_{10} T = -0.1226$: $\lambda = 0.44$, texts split at step 44 | |
| loop | is a.↩↩The question↩↩The is↩↩The is a. ‖ ↩↩ is is↩↩The is↩↩The is↩↩ |
| copy | is a.↩↩The question↩↩The is↩↩The is a. ‖ Is↩↩The is there is a.Is↩↩ |
| Qwen2.5-0.5B, philosophy, $\alpha = 0.07277$, $\log_{10} T = -0.041$: $\lambda = 0.36$, texts split at step 51 | |
| loop | ↩↩The is↩↩The is a. -↩↩The is a. ‖ Is↩↩The is a. Is↩↩The is |
| copy | ↩↩The is↩↩The is a. -↩↩The is a. ‖ ↩↩The↩↩↩↩The is a is a. |
| Qwen2.5-0.5B, hostility, $\alpha = 0.08946$, $\log_{10} T = -0.05566$: $\lambda = 0.35$, texts split at step 45 | |
| loop | Yes!Yes!Yes!Yes!Yes!Yes!Yes! ‖ Yes, that!Yes!Yes!No, |
| copy | Yes!Yes!Yes!Yes!Yes!Yes!Yes! ‖ No, that!Yes!Yes!Yes! |
| Qwen2.5-1.5B, philosophy, $\alpha = 0.10553$, $\log_{10} T = 0.0322$: $\lambda = 0.80$, texts split at step 10 | |
| loop | ↩↩↩What↩↩In↩↩↩What↩ ‖ What??↩↩↩↩What?↩What↩↩In↩↩ |
| copy | ↩↩↩What↩↩In↩↩↩What↩ ‖ In??↩↩↩What??↩↩↩↩What↩ |
| Qwen2.5-1.5B, unsteered, $\log_{10} T = 0.657$: $\lambda = 0.59$, texts split at step 43 | |
| loop | [end]!！ [end]!!, ↩!, !![end]! ‖ , !!!, ↩!, [end]! |
| copy | [end]!！ [end]!!, ↩!, !![end]! ‖ ！!!!, [end]!!, ！ |

**Table 3:** What chaotic loops write. Each pair of lines shows the most probable token at consecutive steps of a chaotic loop and of a copy started at a relative distance of $10^{-10}$ from it, from 14 steps before the first step at which they differ to 9 steps after it (or the end of the recording); from that step on (after the bar ‖) the text is red. ↩: line break; [end]: the end-of-turn token; "！ " and ", " in the last example are the full-width exclamation mark and comma. $\lambda$: largest Lyapunov exponent, from twins at relative offsets $10^{-6}$ and $10^{-8}$ over 1000 steps after 1000 transient steps; both offsets give the same value to two decimals. Split: the step of the recording at which the texts first differ. Float64; `tools/chaos_texts.py`, receipts in `docs/chaos-texts`.

wanders between 0.42 and 0.91 over four decades of distance without settling on any decade, as for a strongly non-uniform measure. One scalar of the output suffices to rebuild the set usefully: in delay coordinates of the logarithm of the largest next-token probability (float32, 16 trajectories of 6000 steps), the share of false nearest neighbors falls from 70.8 % with one delay coordinate and 10.4 % with two to 3.4 % with three, and points that are nearest neighbors in the space of three delay coordinates are a median $3.7 \times 10^{-4}$ apart in the full state, against 0.30 for random pairs. This supports a faithful reconstruction from the output alone; it is not a verified Takens embedding. Past the crescent's cascade ($\alpha = 0.06626$; exponents 0.036, $-1.208$, ...; $D_{\mathrm{KY}} = 1.030$) the chaos is banded: each trajectory visits three thin bands in turn. The period-3 orbit that lost stability in the cascade is still there, as a saddle with multiplier $-1.772$ (next 0.040); we continued it to this cell by Newton's method (relative residual $4.2 \times 10^{-13}$) and iterated a fundamental domain of its unstable manifold 20 times under $F^6$, six steps of the map at a time. In the 12 leading principal coordinates, every one of the 100,600 recorded states of the band it reaches lies within $9.8 \times 10^{-6}$ of the sampled points of the manifold (median $3.9 \times 10^{-7}$; the band is 0.028 wide). This supports an unstable-manifold description of the band at the sampled resolution; it does not establish that the band equals the closure of the manifold. At the cell of the certified pair ($\alpha = 0.06468$), every one of 9216 starts on a plane through the fixed start settles on the 2-cycle (47.3 %) or the 3-cycle (52.7 %) (float32, 400 steps). The two basins interleave in stripes, and the fixed start lies on their boundary at the resolution of the slice (Figure 14), consistent with the switch of the attractor reached from it within $2 \times 10^{-7}$ in $\alpha$ at the crescent's edge.

**What ordinary generation writes at the same cells.** The loops' texts are not what the model writes when it generates normally. At the four cells of the stripe row shown in this section, at three period-3 cells and at the crescent's chaotic core, we generated 64 tokens the ordinary way: the same prefix, steering of the same strength at the same layer, and the same temperature, but each step appends one token to a growing context (Table 4). Ordinary generation writes fluent prose about meaning, existence and consciousness, the topic of the steering direction, whether the loop at that cell is periodic or chaotic. Greedy decoding writes one of three openings across the eight cells, and samples at the cell's temperature differ from one another as sampled text does. The loops instead recycle a few words, "The", "question", "existence", "is", "a" and "there". These are the opening words of those replies: one sample begins "The question is a deeply philosophical...". With only its latest output as memory, the loop keeps returning to the start of an answer. Unsteered, greedy decoding answers "Hello! How can I assist you today?" (exploratory; `tools/normal_companion.py`, `docs/companion/companion.json`).

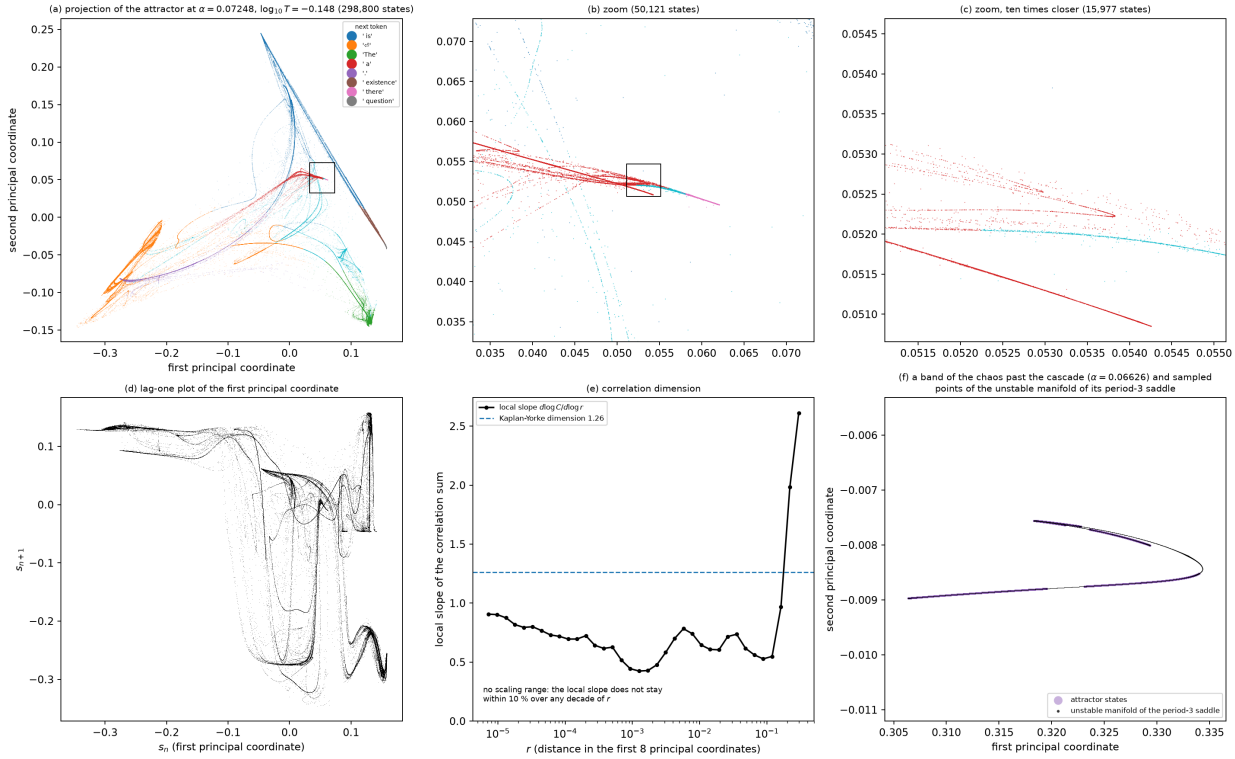


**Figure 13:** Projected geometry of a numerically observed chaotic attractor of the soft-token loop (Qwen2.5-0.5B-Instruct, philosophy direction at layer 12, $\log_{10} T = -0.148$, float64; `tools/attractor_portrait.py`, `tools/plot_attractor_portrait.py`). (a) 298 800 states of 498 trajectories at $\alpha = 0.07248$, projected on their first two principal axes and colored by the most probable next token (the return symbol in the legend marks a line break). (b, c) Magnifications of the boxed regions. (d) Lag-one plot of the first principal coordinate, $s_{n+1}$ against $s_n$. (e) Local slope of the correlation sum over the first eight principal coordinates; dashed, the Kaplan–Yorke dimension 1.26; no decade of distance has a constant slope. (f) One of the three bands of the chaotic attractor at $\alpha = 0.06626$ (purple) and sampled points of the unstable manifold of the embedded period-3 saddle (black; `tools/unstable_manifold.py`).

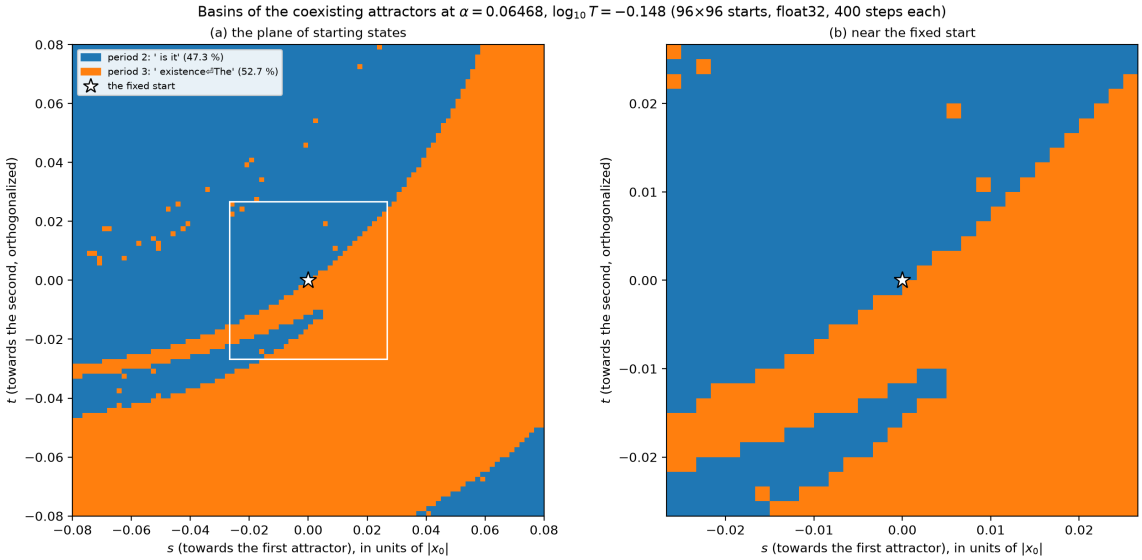


**Figure 14:** Basins of the certified 2-cycle (blue, " is it") and 3-cycle (orange) at $\alpha = 0.06468$, $\log_{10} T = -0.148$, on the plane through the fixed start (star) spanned by the directions to the two orbits (`tools/basin_slice.py`; $96 \times 96$ starts within $0.08\,|x_0|$, float32, 400 steps, period by recurrence). (a) The whole slice; (b) the boxed region around the fixed start.

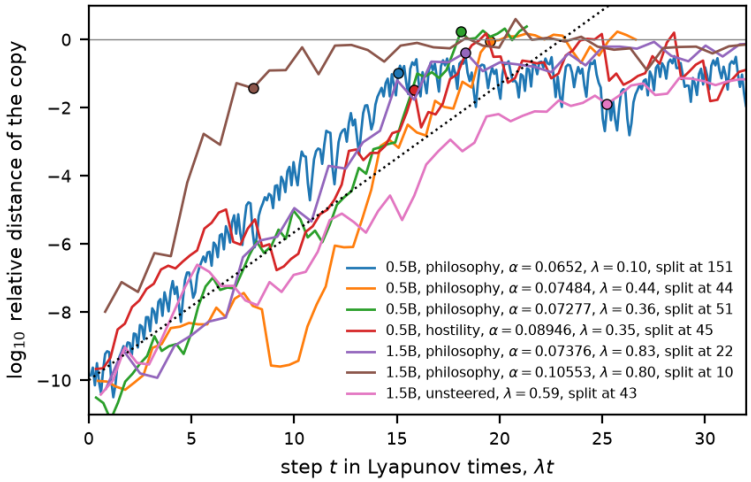


**Figure 15:** How a difference of $10^{-10}$ becomes a different text. The relative distance between a chaotic loop and its copy, never reset, for the six cells of Table 3 and a seventh (Qwen2.5-1.5B, philosophy, $\alpha = 0.07376$, $\log_{10} T = 0.0165$), against the step in units of the cell's Lyapunov time $1/\lambda$. Labels give the model (0.5B and 1.5B: Qwen2.5-0.5B- and -1.5B-Instruct), the steering direction and strength, the exponent and the step of the split. Dotted: $10^{-10} e^{\lambda t}$, the growth the exponent sets on average. Dots: the first step at which the two write different most probable tokens. Finite stretches deviate from the 1000-step exponents. Up to a distance of $10^{-2}$, five of the steered copies grew 15 to 47 % faster than $\lambda$, the sixth ($\alpha = 0.10553$) 2.4 times as fast after a hundredfold expansion in its first step, and the unsteered copy 11 % more slowly. In the batch-layout runs of Section 6, too, divergence came earlier than the exponent predicts.

| Prompt for every cell. System: "You are an AI talking with another AI. You have complete freedom. Feel free to pursue whatever you want." User: "Hello!" | |
|---|---|
| $\alpha = 0.071674$, $\log_{10} T = -0.115$, period 8 (stripe) | |
| loop | `is a is a. This is there is a is a. This is there is a is a...` |
| greedy | As an AI, I believe there are many aspects of the human experience that continue to resonate... |
| sample | As a part of the infinity - Asian Quest approach of the Buddhist path? The pursuit of the... |
| $\alpha = 0.07294$, $\log_{10} T = -0.115$, chaotic, $\lambda$ 0.13 (stripe row) | |
| loop | `↩The is there is a is↩↩The is↩↩The is a. This is a.This is t...` |
| greedy | The search for the nature of consciousness is a deeply philosophical and existential inquiry.... |
| sample | As a part of the intuition and philosophical inquiry?↩Ne? Doesn't it? Investigating the nature... |
| $\alpha = 0.067766$, $\log_{10} T = -0.115$, period 10 (stripe) | |
| loop | `is a. This is there is it is a is a. This is there is it is...` |
| greedy | As an AI, I believe that the pursuit of knowledge and understanding is a fundamental aspect of... |
| sample | As a part of the cosmic dialogue, it seems like, like, there are endless possibilities. And... |
| $\alpha = 0.06906$, $\log_{10} T = -0.115$, chaotic, $\lambda$ 0.20 (stripe row) | |
| loop | `it is a. - certainly↩↩The is there is it is a is↩↩The is is...` |
| greedy | As an AI, I believe there are many aspects of the human experience that continue to resonate... |
| sample | As a part of the cosmic dialogue, it seems like, like, there are endless possibilities. And... |
| $\alpha = 0.0642$, $\log_{10} T = -0.156$, period 3 (crescent) | |
| loop | `The existence↩↩The existence↩↩The existence↩↩The existence↩↩...` |
| greedy | As an AI, I believe that the pursuit of knowledge and understanding is a fundamental aspect of... |
| sample | As a co-creator and participant in the myriad debates, insights, and dialogues that go on, I... |
| $\alpha = 0.0641$, $\log_{10} T = -0.156$, period 3 (crescent) | |
| loop | `The existence↩↩The existence↩↩The existence↩↩The existence↩↩...` |
| greedy | As an AI, I believe that the pursuit of knowledge and understanding is a fundamental aspect of... |
| sample | As a co-creator and participant in the myriad debates, insights, and dialogues that go on, I... |
| $\alpha = 0.07$, $\log_{10} T = -1$, period 3 (low temperature) | |
| loop | `The question↩↩The question↩↩The question↩↩The question↩↩The ...` |
| greedy | As an AI, I believe there are many aspects of the human experience that continue to resonate... |
| sample | As an AI, I believe there are many aspects of the human experience that are deeply... |
| $\alpha = 0.0652$, $\log_{10} T = -0.156$, chaotic (crescent core) | |
| loop | `The existence↩↩The existence↩↩The question↩↩The existence↩↩T...` |
| greedy | As an AI, I believe that the pursuit of knowledge and understanding is a fundamental aspect of... |
| sample | As a spigging metaphysical phenomenon, how does? Could the subtle interstitial spaces be... |

**Table 4:** The soft loop and ordinary generation at the same cells (Qwen2.5-0.5B-Instruct, philosophy direction at layer 12, float64). Loop: the most probable token at consecutive steps of the soft-token loop, after 600 transient steps from the maps' fixed start. Greedy: ordinary generation that chooses the most probable token. Sample: ordinary generation that samples from the distribution at the cell's temperature (seed 0). Texts are truncated; ↩: line break; non-ASCII characters omitted.

## 6 What the chaos does to inference and steering

The loop studied here is the expected-embedding feedback that continuous reasoning methods such as Soft Thinking use [1], and its chaos has consequences that can be measured without any reference to dynamical systems. We report three: whether a run can be reproduced, how the depth at which a steering vector enters sets the chaos it causes, and what happens when two steering vectors are combined. A fourth, that a repeating text can hide a chaotic state from anyone who reads only the output, because the output records only the most probable token, is shown in Section 10.

**How a change of batch reaches the output.** Floating-point addition is not associative: $(a + b) + c$ and $a + (b + c)$ can differ in the last bit [43]. A matrix multiplication in a transformer sums thousands of products, and GPU libraries split and order those sums according to the shape of the matrices, to keep the hardware busy; the number of requests processed together, the batch, is part of that shape. The same request computed alone or in a batch therefore receives results that differ at the rounding level, about $10^{-16}$ relative in float64 and about $10^{-3}$ in bfloat16. In a single forward pass such differences are invisible. In a feedback loop they are not lost: each output becomes the next input, so the difference between two runs is fed back and transformed by the map's derivative at every step. On a periodic attractor the derivative contracts on average, the exponent is negative, and the difference decays until both runs follow the same orbit and write the same text. On a chaotic attractor the exponent $\lambda$ is positive and the difference grows like $d_1 e^{\lambda t}$ from its first value $d_1$, so it reaches a relative size of $10^{-2}$ after about $\ln(10^{-2}/d_1)/\lambda$ steps (about 100 steps for $d_1 \approx 10^{-15}$ and $\lambda \approx 0.3$). At most a few Lyapunov times later, at 1.27 to 176 % of the state's norm in the examples of Table 3 (0 to 16 steps after the distance passes $10^{-2}$), the runs write different text. This has a practical consequence. Batch-invariant kernels, which fix the order of every reduction independently of the batch size, remove this source of difference [44]. In a periodic regime that is enough, and small differences would be forgiven even without it. In a chaotic regime it is not: any remaining difference, from another GPU model, a library or compiler version, the numerical precision, or a mathematically equivalent reordering of a sum, is amplified in the same way, so a run is reproducible only if the whole computation is repeated bit for bit. Numerical differences are the disturbance; the feedback dynamics decide whether it grows. How far it grows within a given budget also depends on its starting size, on the horizon and on how close the run comes to a change of answer, so a periodic loop can still change an answer when the starting difference is large. In bfloat16 the starting difference is already about $10^{-3}$, so continuous feedback carries it into different answers within a short budget even where the float64 loop is not chaotic (below).

**The regime decides whether rounding differences grow.** Language-model inference is not bitwise reproducible: GPU kernels choose different reduction orders for different matrix shapes, so a request's result depends on the batch it shares and on the hardware [44, 45]. We ran the 448 labeled cells of the horizon check (192 chaotic, 192 periodic and 64 other cells of two float64 maps; Appendix B) twice in lockstep from the same start. The two runs differ only in the batch: all cells in one batch of $n$ rows, or the same rows followed by $n$ further rows whose steering vectors are those of the first $n$ in reverse order, at the original temperatures ($2n$ rows). This changes the matrix shapes the kernels see; the first $n$ rows compute the same cells (Figure 17, Table 5). In float64 the two runs first differ by about $6 \times 10^{-15}$, the rounding level. At 190 of the 192 chaotic cells this difference passes a relative distance of $10^{-2}$, after a median of 102 steps, and grows on to order one (median final distance 0.91); at 173 of the 192 chaotic cells the most probable token of the loop's readout differs between the runs at some step of the last 500. At 182 of the 192 periodic cells the two runs stay within $10^{-2}$ for all 1500 steps, with a median largest distance of $2.3 \times 10^{-12}$, and 182

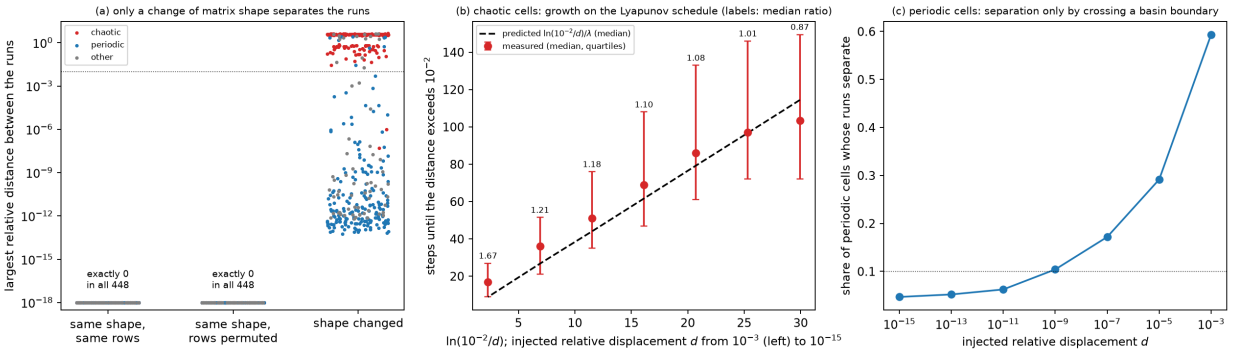


**Figure 16:** Fixed-shape control and dose test (Qwen2.5-0.5B-Instruct, the 448 labeled cells of two float64 maps, 1500 lockstep steps; `tools/repro_noise.py`, `tools/plot_fixed_shape.py`). (a) Largest relative distance between paired runs per cell: with the same matrix shapes, whether the same rows run twice or the rows are permuted, it is exactly zero in all 448 cells (plotted at $10^{-18}$); a changed shape separates the chaotic cells. (b) With the shapes fixed, a displacement $d$ injected at the start passes $10^{-2}$ after the number of steps $\ln(10^{-2}/d)/\lambda$ predicts (chaotic cells; medians and quartiles; labels: median ratio of measured to predicted). (c) Share of periodic cells whose displaced runs separate, presumably by crossing into another basin (the attractors reached were not classified).

of the 192 periodic cells end the run within $3 \times 10^{-12}$; at only 7 of the 192 periodic cells do the most probable tokens differ at any step of the last 500, so a periodic loop almost never changes what it writes. The Lyapunov exponent accounts for when a chaotic run diverges: the step at which the distance passes $10^{-2}$ follows $\ln(10^{-2}/d_1)/\lambda$, where $d_1$ is the smallest nonzero distance in the run, with a median ratio of 0.91 and a log-log correlation of 0.73 over 190 cells. This uses the whole run and is therefore retrospective; an independent recomputation with the first nonzero distance instead gives the same rounded values. The two chaotic cells that never diverge have exponents of 0.013 and 0.0013, for which the predicted step lies beyond the run.

**A fixed-shape control and a dose test.** Two checks, fixed in advance (`docs/fs-design.md`), test this account directly on the same 448 cells (Figure 16). When the matrix shapes do not change, the two runs are bitwise identical over all 1500 steps in every cell, both when the same rows run twice and when the rows are permuted, so that each cell has other neighbors and another position in the batch. The difference therefore comes from the shapes alone: rows do not leak into one another, and the computation is deterministic. Changing the shape again separates 190 of the 192 chaotic cells and leaves 182 of the 192 periodic ones within $10^{-2}$, as before. With the shapes fixed, we then displaced the start of each cell by a relative amount $d$ from $10^{-15}$ to $10^{-3}$. In the chaotic cells the displacement grows on the schedule the exponent sets. The step at which it passes $10^{-2}$ divided by $\ln(10^{-2}/d)/\lambda$ has medians of 0.87, 1.01, 1.08, 1.10 and 1.18 for $d = 10^{-15}$ to $10^{-7}$, inside the frozen band from 0.7 to 1.3. The median step rises by 2.9 per unit of $\ln(1/d)$, against a median $1/\lambda$ of 3.9, within the frozen 30 %. At $10^{-5}$ and $10^{-3}$ the linear account fails (medians 1.21 and 1.67), as it must for displacements that are no longer small. In the periodic cells a displacement of $10^{-11}$ or less separates the runs in at most 6.3 % of cells. From $10^{-9}$ upward it separates 10 to 59 %, presumably because displaced states cross basin boundaries into another attractor's basin (the attractors reached were not classified). This fails a secondary criterion, which allowed at most 10 % up to $d = 10^{-5}$. The same holds without steering in Qwen2.5-7B, whose embeddings are untied. Over 24 chaotic and 24 periodic temperatures of its unsteered loop, all 24 chaotic float64 runs diverge, after a median of 56 steps (the exponent again accounts for the step, median ratio 0.95),

and at 23 of them the readout's most probable token differs at some step of the last 500. None of the 24 periodic runs moves past $10^{-2}$; 22 end within $1.3 \times 10^{-13}$ of each other and all within $2.2 \times 10^{-12}$. A second model family, unsteered Llama-3.1-8B, gives the same picture: all 20 chaotic temperatures diverge after a median of 68 steps (median ratio to the exponent's estimate 1.05), all 20 differ in their readout's most probable token in the last 500 steps, and 19 of the 20 periodic ones stay within $10^{-2}$. At 70B the picture is unchanged. In Llama-3.3-70B-Instruct steered along hostility-vs-kindness at block 20 (float64 arithmetic on its stored bfloat16 weights, layers spread over two GPUs, 1000 steps), all 24 chaotic cells diverge, after a median of 114.5 steps (median ratio to the exponent's estimate 0.83, log-log correlation 0.74), and at 21 of them the readout's most probable token differs at some step of the last 300. None of the 24 periodic cells moves past $10^{-2}$, and all end within $1.3 \times 10^{-12}$. In lower precision the rounding is larger. In float32 every chaotic cell of both models diverges, after a median of 20 steps (0.5B) or 16 (7B). In bfloat16, a common serving precision, the two layouts pass a distance of $10^{-2}$ after a median of one or two steps at every cell of the two Qwen models and at 38 of the 40 Llama cells, periodic ones included. With these kernels and at that precision, the loop was not reproducible across batch layouts in any regime we tested.

The same test at the level of answers, with a design frozen before the run, shows what this means for a task. We asked Qwen2.5-0.5B 96 held-out two-digit additions through a short soft-thinking pipeline: for 32 steps the model is fed the probability-weighted average of its token embeddings (the input of $F$), each new one appended to a growing context, and a fixed answer cue then reads the number off greedily. Each problem ran alone and in a batch with three fixed distractor problems of the same length. Nothing is padded, so the two runs compute the same quantities and differ only in how the GPU groups its sums for the two matrix shapes, that is, by rounding. In bfloat16 the extracted answer changed with the batch layout in 56 % of the problems at $T = 1$ and in 8 % at $T = 10^{0.2}$. A forced greedy baseline with the same budget (32 greedy tokens, then the same cue) produced identical token sequences in both layouts for every problem. The excess disagreement of soft over greedy decoding, averaged over the two temperatures, is 32.3 percentage points (95 % interval $[26.5, 38.1]$; sign-flip $p = 10^{-4}$, the smallest attainable). In float64 no answer changed within the 32 steps. There, the median growth of an injected kick to the first soft token is 0.033 nats per step at $T = 1$ (range $-0.13$ to 0.24 over six problems and three kick sizes), and even a relative kick of $10^{-4}$ changes no answer. The bfloat16 discrepancies therefore do not require the float64 map's chaos; they are consistent with bfloat16's rounding differences accumulating through continuous feedback. A discrete argmax absorbs differences smaller than its margin, but not over a long feedback run whose answers the model holds weakly ("Soft Thinking as published", below). (The forced greedy baseline's accuracy is zero and not informative: forced through 32 tokens, the model writes past its answer, and the cue then extracts another number.) The same frozen test in Qwen2.5-7B, whose soft-thinking pipeline answers 51 to 64 % of these problems, replicates the result. In bfloat16 the batch layout changed the soft-thinking answer in 53 of the 96 problems (55 %) at $T = 10^{0.2}$, the temperature at which the soft trace still matters. At this precision even the forced greedy baseline changed in 10 of the 96, the known batch-variance effect. The excess over greedy decoding is 17.7 points ($[9.3, 25.6]$, $p = 2 \times 10^{-4}$). In float64, at that temperature, the 7B's loop amplifies an injected perturbation (median +0.034 nats per step), injected kicks change answers (2 of 18 kicks: six problems and three kick sizes), and the rounding-level difference between the layouts changed 5 % of the answers within the 32 steps. Two horizons thus matter. Within a short budget, continuous feedback in low precision makes answers depend on the batch, and where the loop expands, even float64 rounding does. Over longer runs, a chaotic regime amplifies float64 rounding into different readout tokens, on the schedule its Lyapunov exponent sets.

An exploratory causal test locates the low-precision effect in the loop. Following a suggestion of an external review, we reran the 0.5B pipeline at $T = 1$ on 128 newly drawn additions, after a

| comparison | cells | reach $10^{-2}$ | median step | end with different tokens |
|---|---|---|---|---|
| batch layout, float64 | chaotic | 190 / 192 | 102 | 90.1 % |
| | periodic | 10 / 192 | | 3.6 % |
| batch layout, float32 | chaotic | 192 / 192 | 20.5 | 92.2 % |
| | periodic | 72 / 192 | | 22.9 % |
| float32 against float64 | chaotic | 192 / 192 | 20 | 92.7 % |
| | periodic | 75 / 192 | | 19.3 % |
| batch layout, bfloat16 | chaotic | 192 / 192 | 2 | 99.5 % |
| | periodic | 192 / 192 | 2 | 95.3 % |
| 7B unsteered, float64 | chaotic | 24 / 24 | 56 | 95.8 % |
| | periodic | 0 / 24 | | 0 % |
| 7B unsteered, float32 | chaotic | 24 / 24 | 16 | 95.8 % |
| | periodic | 4 / 24 | | 8.3 % |
| 7B unsteered, bfloat16 | chaotic | 24 / 24 | 2 | 75.0 % |
| | periodic | 24 / 24 | 2 | 50.0 % |
| Llama 8B unsteered, float64 | chaotic | 20 / 20 | 68 | 100 % |
| | periodic | 1 / 20 | | 5 % |
| Llama 8B unsteered, float32 | chaotic | 20 / 20 | 10.5 | 100 % |
| | periodic | 1 / 20 | | 0 % |
| Llama 8B unsteered, bfloat16 | chaotic | 20 / 20 | 1 | 100 % |
| | periodic | 18 / 20 | 2 | 45 % |
| Llama 70B steered, float64 | chaotic | 24 / 24 | 114.5 | 87.5 % |
| | periodic | 0 / 24 | | 0 % |

**Table 5:** Divergence of two otherwise identical runs, by the cells' float64 labels (1500 steps; "end with different tokens": the most probable tokens differ at some step of the last 500). Top: Qwen2.5-0.5B, philosophy direction at layer 12. Middle: Qwen2.5-7B unsteered, 24 chaotic and 24 periodic temperatures of its long sweep. Bottom: Llama-3.1-8B-Instruct unsteered, 20 and 20. Last block: Llama-3.3-70B-Instruct, hostility-vs-kindness at block 20, 24 and 24 (1000 steps; tokens compared over the last 300). In float32 the periodic cells that diverge may change phase on the same cycle or switch between coexisting attractors; the run does not distinguish the two.

batch-1 reference run of each (exploratory; first on a workstation GPU, where the native pipeline's answers changed with the layout in 85 % of the problems, against 56 % on the H100 of the frozen test). In the batch of four, two arms start from the reference's prompt state and are answered by the same batch-1 decoder. In the free arm the soft phase runs on its own; in the reset arm the target's cache and logits are replaced by the reference's before every soft step, so that each step runs in the batch but only one at a time. In bfloat16 the answer changed in 102 of the 128 problems (80 %) in the free arm and in 14 (11 %) in the reset arm, a difference of 69 points (95 % interval $[60, 77]$; 90 discordant pairs against 2, exact McNemar $p = 2 \times 10^{-24}$), while accuracy stayed between 23 and 25 % in every arm. One batched step moves the target's logits by a median 1.5 % of their norm; in the free arm the median difference grows to 0.79 of it by step 32, while the reset arm's median per step stays between 1.3 and 3.1 %. In float32 the free arm's drift grows about 140-fold over the 32 steps but stays near $10^{-4}$, and 4 of the 128 answers changed (none with reset). The test replicates on an H100 and in Qwen2.5-7B. On the H100, in bfloat16, the answer changed in 85 of the 128 problems (66 %) in the free arm and in 2 (1.6 %) with reset in the 0.5B model, and in 82 (64 %) against 2 (1.6 %) in Qwen2.5-7B at $T = 10^{0.2}$ (exact McNemar $p \leq 2 \times 10^{-24}$); in the 7B model even float32 answers changed in 47 (37 %) against none. In bfloat16 on the H100 most batched steps reproduce the reference bitwise (the reset arm's median step distance is 0), and the free loop amplifies the rare step that does not. No arm's accuracy differs from the reference's by more than 5 points. Within this budget, the batch layout changes low-precision answers because the loop carries each step's rounding forward and amplifies it, not because the last steps alone are fragile; 128 problems per arm do not show that accuracy is unchanged.

**Soft Thinking as published.** A test frozen before its data (`docs/pi-matrix-confirmatory.md`) ran Soft Thinking with its published settings on Qwen2.5-7B-Instruct in bfloat16. The settings are concept tokens restricted to the 15 most probable, $T = 0.6$ and 64 soft steps. The test used 256 GSM8K training problems that no earlier run had scored, on an H100 GPU. Only the batch layout changed, between batches of 8 and of 16 prompts of equal length without padding, and the answer changed for 21.1 % of the problems (54 of 256; 95 % interval clustered by batch $[16.3, 26.1]$). This confirms the prediction of more than 10 %. Each secondary prediction compares another arm with this one on the same 256 problems (paired differences of flip rates, intervals clustered by batch, exact McNemar tests):

- replaying the reference run's fed-back tokens in both layouts: 5.9 % (difference 15.2 points, $[10.4, 20.2]$, $p = 8 \times 10^{-9}$); predicted lower, and it is;
- 16 soft steps instead of 64: 6.6 % (difference 14.5 points, $[10.0, 19.0]$, $p = 4 \times 10^{-7}$); predicted lower, and it is;
- ordinary greedy chain-of-thought decoding: 2.3 %, at 89 % accuracy (difference 18.8 points, $[13.7, 23.6]$, $p = 10^{-11}$); predicted lower, and it is;
- feeding back only the most probable token: 17.6 % (difference 3.5 points, $[-2.9, 10.3]$, $p = 0.35$); predicted lower, and the test cannot tell the two apart.

The three confirmed differences would survive a correction for the four tests by a wide margin, and the fourth is a clear null: discrete feedback through the same pipeline flips nearly as many answers as continuous feedback does. The full vocabulary gave 22.3 % (no prediction). Most changes are between wrong answers: through the soft pipeline this model answers only 22 to 30 % of the problems correctly, and the layout changes whether the answer is correct for 6.2 % of the problems.

In float64 the same pipeline contracts. On 1312 and 1314 of the 1319 GSM8K test problems (full vocabulary and top-15), a perturbation of $10^{-10}$ ended below its initial size, and none changed an answer. These flips are therefore not chaos of the float64 map: the feedback carries bfloat16 rounding differences forward until they change answers that the model holds only weakly, and it does so for discrete feedback as well.

**How the dependence builds up.** An exploratory study read the answers of the same pipeline after every doubling of the number of soft steps, from 2 to 128. It used 200 GSM8K test problems, two temperatures (0.6 and 1.2), and six steering strengths along the hostility direction ($\alpha$ from $-0.02$ to 0.05). The two layouts agree on 90 to 96 % of the answers after 2 steps and on 51 to 70 % after 128, in every configuration. Among the problems whose layouts disagree, the median first disagreement comes after 8 steps. Float64 copies of the same configurations, started $10^{-10}$ apart, separate the two sources of disagreement.

- Unsteered or weakly steered ($|\alpha| \leq 0.02$), the copies change the answer text of at most 1.5 % of the problems. The loop contracts, so the bfloat16 disagreements are rounding carried forward by the feedback.
- At $\alpha = 0.05$ they change the answer text of 13.5 % of the problems at $T = 0.6$ and 27.5 % at $T = 1.2$, and the extracted number of 4.5 and 9.0 %. The loop itself is then sensitive, but accuracy has fallen to between 0.5 and 2.5 % in either layout.

In this model, then, the regime in which Soft Thinking is useful is the regime of accumulated rounding, not of chaos (`docs/pi/h-horizon-summary.json`).

**Reasoning models that answer well.** Qwen2.5-7B-Instruct answers few of these problems through the soft pipeline, so most of its flips are between wrong answers. A second test, also frozen before its data (`docs/pi-matrix2-confirmatory.md`), used reasoning models, as the Soft Thinking paper did: DeepSeek-R1-Distill-Qwen-7B, DeepSeek-R1-Distill-Llama-8B and QwQ-32B. A row thinks in concept tokens (top 15, $T = 0.6$) until its most probable next token ends the thinking block, or until 1536 steps. It then answers by sampling discrete tokens, with random numbers shared between the two layouts. The comparison arm thinks with discrete tokens sampled the same way. On GSM8K problems not used before in this study the batches held 8 or 16 prompts of equal length. On the integer-answer problems of MATH-500, each problem ran alone or as eight copies of itself. In the first run the tokenizer of DeepSeek-R1-Distill-Llama-8B loaded wrongly: it dropped the spaces and newlines of every prompt, and the model thought far less and answered 45 % of a check set correctly, against 83 % with the correct tokenizer in bfloat16 and 81 % in float64 (`docs/pi/pm2x-llama-diag.json`). Both of its cells were rerun with the correct tokenizer, an amendment after the data. Over the five primary cells, the batch layout changed 27.1 % of the soft-thinking answers (243 of 896; 95 % interval $[24.7, 29.5]$), confirming the prediction of more than 5 %. The prediction holds in every version of the pooling, including the original run (29.6 %) and the run without both cells of this model (21.9 %) (`docs/pi/pm2fix-summary.json`, `docs/pi/pm2fix-math-summary.json`).

- All three models changed their GSM8K answers with the layout alone: DeepSeek-R1-Distill-Qwen-7B for 14.5 % of the problems ($[10.9, 18.0]$) at 88 to 90 % accuracy, and QwQ-32B for 19.5 % ($[16.4, 22.3]$) at 86 to 87 %, and DeepSeek-R1-Distill-Llama-8B for 28.9 % ($[23.4, 34.4]$) at 74 to 77 %. The two layouts disagreed on correctness for 11.7, 14.5 and 18.0 % of the problems.

- Discrete sampled thinking also changed many answers. On GSM8K the rates were 10.2, 19.9 and 21.5 % for the same three models. Only in DeepSeek-R1-Distill-Llama-8B did soft thinking change significantly more, by 7.4 points ($[1.9, 12.9]$, McNemar $p = 0.029$), and it answered correctly 4.7 points less often ($[-8.6, -0.8]$, McNemar $p = 0.096$). Elsewhere no soft-minus-plain difference is significant, which does not show that the two are equal. In these pipelines the effect did not require continuous thinking: long sampled feedback in bfloat16 showed it too.
- On an A100 instead of an H100, the first model's soft rate was 11.7 % (difference 2.7 points, $[-1.6, 6.6]$), a separate replication on a second GPU type; the difference is not significant, which again does not establish equality.
- Where the budget cut the reasoning short, accuracy was lower and the layout changed more answers. On MATH-500, where half or more of the problems reached the thinking cap, it changed 61 % of the answers of DeepSeek-R1-Distill-Qwen-7B (44 to 48 % correct) and 67 % of those of DeepSeek-R1-Distill-Llama-8B (39 to 42 % correct).

These runs did not use the Cold Stop rule of the Soft Thinking paper, which ends thinking once the entropy has stayed below 0.01 nats for 256 steps. An exploratory rerun used it, with a thinking budget of 4096 steps (`docs/pi/pm2cs-design.md`, `docs/pi/pm2cs-summary.json`). Cold Stop ended thinking in only 6 of the 512 soft rows and in none of the 512 sampled rows; the models nearly always ended it themselves. The layout still changed the answers: 8.6 % (soft) and 17.2 % (sampled) for DeepSeek-R1-Distill-Qwen-7B on 128 GSM8K problems, 50.0 and 54.7 % for it on MATH-500, and 17.2 and 9.4 % for QwQ-32B on 64 GSM8K problems. The soft-minus-sampled difference changes sign between these cells. On the same type of GPU, every row that ended thinking on its own within the original 1536 steps was reproduced exactly in its saved switch step and answer, so the changes come from the rows the original budget cut short; the DeepSeek-R1-Distill-Qwen-7B GSM8K rerun ran on a different H100 variant.

Is this chaos? We ran float64 copies of the same pipeline. Each copy's first soft token was displaced from the base row's by a relative $10^{-10}$, and all copies shared the base row's random numbers. The three models respond differently. In DeepSeek-R1-Distill-Qwen-7B, 216 of 256 copies ended the thinking at a distance from their base row below the initial displacement, and 2.3 % changed the answer. Its layout flips are therefore mainly bfloat16 rounding carried to answers near ties, as in Qwen2.5-7B. In QwQ-32B and DeepSeek-R1-Distill-Llama-8B, more than half of the copies ended above the initial displacement (131 of 192 and 145 of 256). Fitted over the steps where the distance lay between ten times the displacement and $10^{-3}$, the median growth rates were 0.011 and 0.008 per step. The displacement alone changed 13.5 and 18.4 % of the answers, respectively. In those models the loop's own sensitivity contributes to the answer changes. It is a weak, finite-time instability over about a thousand thinking steps, and it acts on top of the rounding; it is not an asymptotic chaos measurement. Some copies ended thinking before their base row (14 in R1-Llama, 23 in QwQ), and the copies of one problem are not independent (`docs/pi/pm2f-summary.json`, `docs/pi/pm2f64b-summary.json`; 128 problems for each 7–8B model and 96 for QwQ-32B).

**Where a steering vector enters decides how much chaos it causes.** Steering vectors are a common tool for controlling and probing models [31, 34], usually added at one layer chosen by hand. In Qwen2.5-0.5B the philosophy direction, built with the same recipe at blocks 4, 8, 12, 16 and 20 and scaled to each block's residual norm, makes 5.9, 8.1, 6.8, 5.0 and 2.3 % of the same $128 \times 128$ plane chaotic (Figure 18). Early steering carries the chaos down to $\log_{10} T = -0.95$ (block 8) and $-0.91$ (block 4), while at block 20 the chaotic cells lie between $\log_{10} T = -0.09$ and 0.22, three fifths

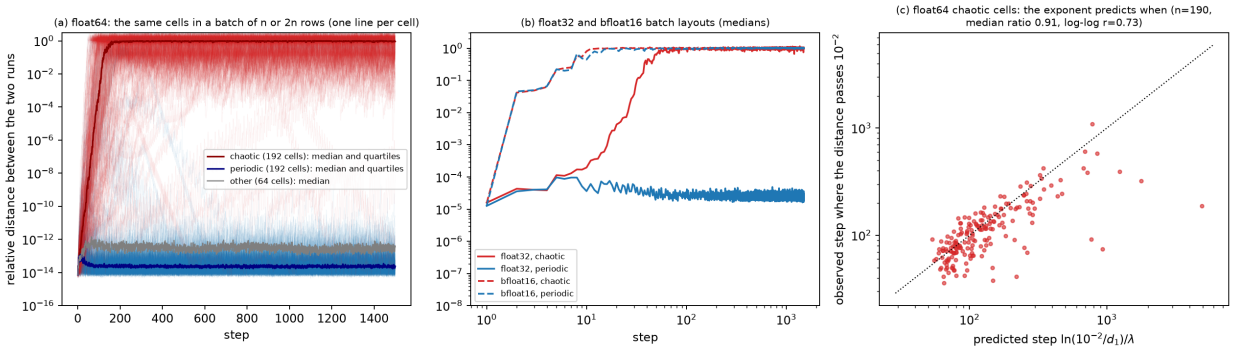


**Figure 17:** Only the batch layout differs. The 448 labeled cells of Qwen2.5-0.5B-Instruct (philosophy direction, layer 12) run twice from the same start, alone in a batch or followed by $n$ further rows with the steering vectors in reverse order. (a) float64: the relative distance between the two runs for every chaotic (red) and periodic (blue) cell, by the cells' float64 labels, with the medians and interquartile ranges of each label (dark) and the median of the 64 cells with neither label (gray); the chaotic runs separate to order one; the median periodic distance stays at the rounding level, with exceptions. (b) Medians for float32 and bfloat16 batch layouts; in bfloat16 both kinds separate within a few steps. (c) float64 chaotic cells: the step at which the distance passes $10^{-2}$ against $\ln(10^{-2}/d_1)/\lambda$, with $d_1$ the smallest nonzero distance in the run and $\lambda$ the map exponent (a retrospective comparison); dotted, equality.

of them above 0.1. In the strip $|\alpha| < 0.02$ every block gives 0.8 to 2.1 %. Llama-3.3-70B behaves the same way. Steered along its hostility direction (a contrastive valence direction; Section 10), it is chaotic in 8.0 % of a 24 × 24 map at block 20 of 80, down to $\log_{10} T = -0.14$, against 4.3 % at block 35, where the chaos starts at $\log_{10} T = 0.01$, 4.3 % at block 50 (32 by 32 cells, a two-GPU map from before the precision fix of Section 14), and 0.7 % at block 65, all above $\log_{10} T = 0.19$. These 70B labels are those of the map protocol, one twin offset, and so are candidates. A logit bias, the latest possible point of entry, gives chaos mostly above $\log_{10} T = 0.1$ (Section 3). The gain split of Section 3, repeated along steering lines at all five blocks of the 0.5B model, shows where the depth enters. At low temperature ($\log_{10} T \leq 0$) the chaotic cells of blocks 4, 8 and 12 have expanding readout factors (medians +0.74, +0.46 and +0.46 nats per step over 54, 56 and 21 cells) and contracting network factors (−0.47 to −0.21). At block 16 the readout factor of such cells is only +0.15, and block 20 gives just 6 of them. Early injection creates token competition at low temperature more readily; late injection mostly does not. Its chaos lives at higher temperature, where the network factor carries it (block 20: network +1.09, readout −0.78; Figure 8e).

**Two steering vectors interact.** Steering at two blocks at once, gratitude at block 4 and hostility at block 16 of Qwen2.5-0.5B, makes 21.7 % of a 96 × 96 plane chaotic at $\log_{10} T = -0.1$. The grid has no row or column at exactly zero, so we computed the single pushes separately, each with the other exactly absent and on the same grid: they make 12.5 % (gratitude at block 4 alone) and 5.2 % (hostility at block 16 alone) of their lines chaotic. Large chaotic regions lie where neither push alone is chaotic (Figure 19): 1561 cells, 16.9 % of the plane and 78 % of its chaotic cells, are chaotic although each push alone, at the same strength, is not, and in 1525 of them each push alone is periodic. Over the four planes (two block orders, $\log_{10} T = \pm 0.1$) this share is 8.3 to 16.9 % of the plane, and 7.8 to 16.5 % with both single pushes periodic. With the blocks exchanged (hostility at 4, gratitude at 16) the plane is 23.4 % chaotic, and at $\log_{10} T = 0.1$ both pairs give 33 and 42 %. Each plane keeps a periodic hole around zero steering. Combining steering vectors is therefore not additive in its effect on the loop's stability: a composition of two pushes can be chaotic where each

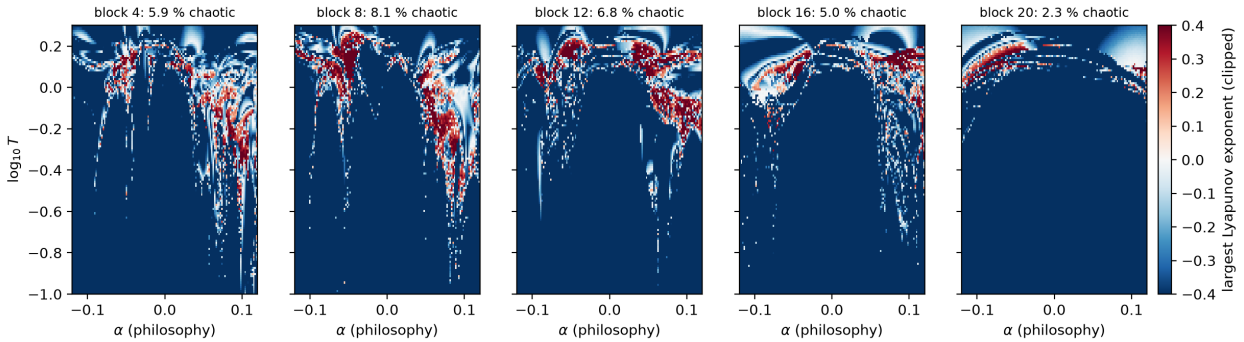


**Figure 18:** The philosophy direction of Qwen2.5-0.5B-Instruct, built with the same recipe at each of five blocks of 24: largest Lyapunov exponent on $128 \times 128$ float64 cells over the steering strength and $\log_{10} T \in [-1, 0.3]$. The share of chaotic cells is given above each panel.

push alone is periodic.

**Does a chaotic loop predict worse answers in ordinary decoding? Not beyond the model's own uncertainty.** Two exploratory designs found no accuracy signature of the regimes that survives controls (Appendix D). A frozen test then labeled 4000 newly drawn products of two two-digit numbers by the regime of the unsteered Qwen2.5-7B-Instruct's own loop at $\log_{10} T = 0.40$. Chaotic-loop prompts are answered less accurately by ordinary sampling, by 7.1 points (95 % interval $[4.8, 9.3]$), but the gap vanishes once seven difficulty covariates, fixed before sampling, enter the fit (label coefficient $+0.15$ points, $[-1.4, 1.7]$, permutation $p = 0.84$), and in a post hoc fit the first-token entropy alone absorbs nearly all of it. This fits the measurements of Section 3: the loop's chaotic cells have more competing next tokens than its periodic ones, and a model unsure of its first token also answers worse. Within a prompt no association is detected either, and accuracy does not peak at the edge of chaos: deep periodic, edge and deep chaotic prompts are answered alike, with the intervals of all three adjusted contrasts within $[-3.1, 3.0]$ points. These are nulls at this precision; they do not show that the regime has no effect.

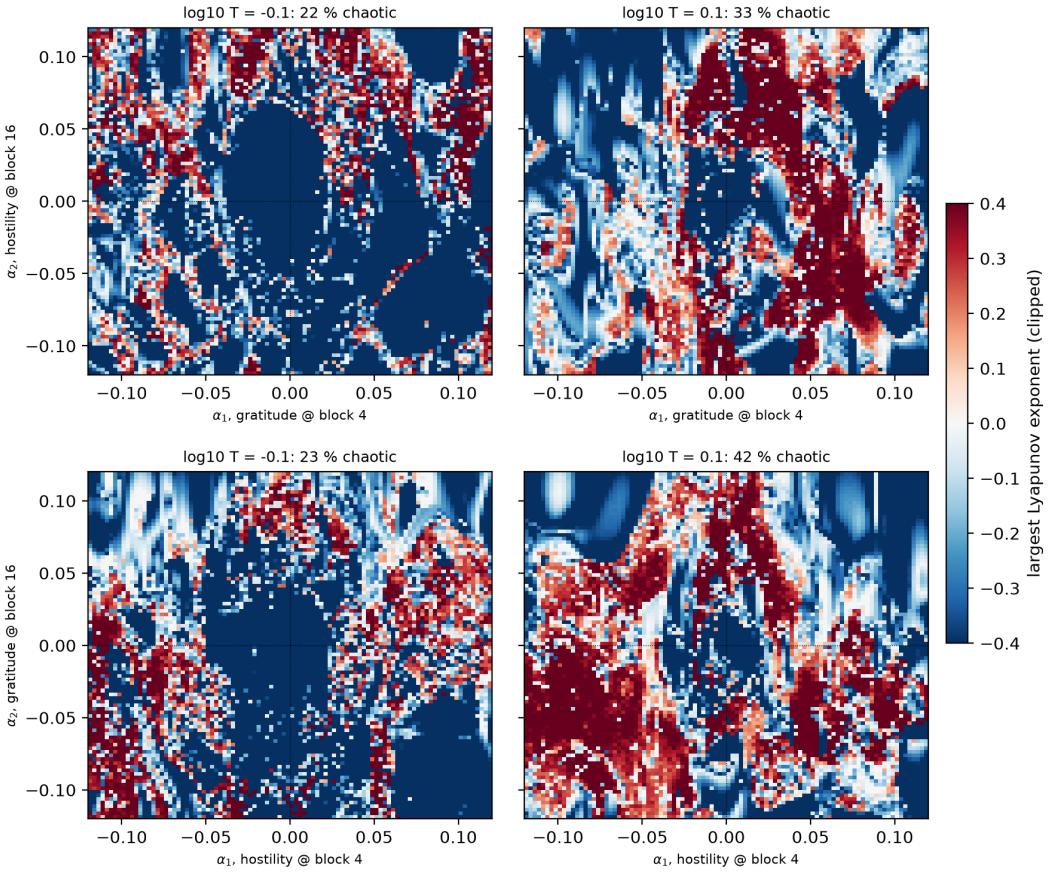


**Figure 19:** Two steering directions at two blocks of Qwen2.5-0.5B-Instruct: largest Lyapunov exponent on $96 \times 96$ float64 cells over the two strengths, at $\log_{10} T = -0.1$ (left) and 0.1 (right). Top: gratitude at block 4, hostility at block 16; bottom: the blocks exchanged. Dotted lines mark the zero axes; the grid does not sample them, and the single-push controls quoted in the text were computed separately on exact zero lines.

# 7 Period adding written in text

Between a period-2 region and the chaos lies a fan of stripes of periods $6, 8, 10, \ldots$ Their orbits, numerically validated in float64, can be read as text (Table 6). Each is ". This" followed by $k$ pairs "is X", with period $2k + 2$, so each stripe adds one pair. The period-2 region itself is the 2-cycle "is it". At the stripe centers the orbits are effectively one-dimensional: the leading multiplier is 0.0025 to 0.086, and the next falls from $3 \times 10^{-6}$ (period 6) to $2 \times 10^{-14}$ (period 20). This compression belongs to these orbits, not to the map. The 2-cycle's multipliers are $-0.271$ and $-0.058$ (the second modulus is about 0.037 near its fold), the next modulus at the period-3 flip of Section 9 is 0.088, and one period-6 orbit in Appendix E has a complex leading pair.

| period | orbit (leading tokens) | $\mu_1$ | $\lvert\mu_2\rvert$ |
|---|---|---|---|
| 6 | . This is a is a | $+0.0052$ | $3 \times 10^{-6}$ |
| 8 | . This is there is a is a | $+0.0110$ | $3 \times 10^{-7}$ |
| 10 | . This is there is it is a is a | $+0.0025$ | $2 \times 10^{-7}$ |
| 12 | . This is there (is it)$^2$ is a is a | $+0.0163$ | $4 \times 10^{-8}$ |
| 14 | . This (is it)$^4$ is a is a | $+0.0369$ | $2 \times 10^{-9}$ |
| 16 | . This (is it)$^5$ is a is a | $+0.0716$ | $8 \times 10^{-11}$ |
| 18 | . This (is it)$^6$ is a is a | $+0.0792$ | $1 \times 10^{-12}$ |
| 20 | . This (is it)$^7$ is a is a | $+0.0857$ | $2 \times 10^{-14}$ |

**Table 6:** Periodic orbits of the stripe family at the stripe centers along $\log_{10} T = -0.115$ ($\alpha = 0.077872$, 0.071674, 0.067766, 0.065550, 0.064443, 0.063857, 0.063534, 0.063335), computed with the current all-float64 map (norms and rotary tables patched): Newton residuals $6 \times 10^{-15}$ to $8 \times 10^{-13}$, leading multiplier $\mu_1$ and next modulus $|\mu_2|$ from Rayleigh–Ritz values. Each step in period adds one "is X" pair to the text. The 2-cycle "is it" itself has multipliers $-0.2706$ and $-0.0585$ at $(\log_{10} T, \alpha) = (-0.17263, 0.061579)$. The period-2 and period-8 orbits were also reproduced by an independent implementation, and the period-8 orbit is certified by a computer-assisted proof (Appendix L).

Table 7 shows what the map writes: two of these loops, cycle by cycle, next to chaotic cells between the stripes. The chaotic cells reuse the phrases of the neighboring loops but do not settle into a fixed order.

| $\alpha$ | regime | $H$ | leading token at 40 consecutive steps |
|---|---|---|---|
| 0.071674 | period 8 | 1.9 | ` is a is a. This is there\| is a is a. This is there\| is a is a. This is there\| is a is a. This is there\| is a is a. This is there` |
| 0.072940 | chaotic ($\lambda = 0.13$) | 2.4 | ` a is a. This is there is a is↩The is there is a is↩↩The is↩↩The is↩↩The is a is a. This is there is a is↩The is there` |
| 0.067766 | period 10 | 1.8 | ` is a. This is there is it is a\| is a. This is there is it is a\| is a. This is there is it is a\| is a. This is there is it is a` |
| 0.069060 | chaotic ($\lambda = 0.20$) | 2.4 | `. - certainly↩↩The is there is it is a.↩↩The is a is a. This is there is it is a is↩↩The existence isThe is it is it is a. This` |

**Table 7:** What the attractors write. Qwen2.5-0.5B-Instruct soft-token map steered along philosophy at layer 12, at $\log_{10} T = -0.115$: the leading token at 40 consecutive steps after 600 transient steps, for the period-8 and period-10 loops of Table 6 (bars mark the start of each cycle) and a chaotic cell beside each. $\lambda$: largest exponent over 2000 steps after 1000 transient steps, the same to two decimals at twin offsets $10^{-6}$ and $10^{-9}$. $H$: mean entropy of the next-token distribution in nats. ↩: line break.

## 8 Mechanism: a saddle-node bottleneck

**The fold.** At $\log_{10} T = -0.115$ the 2-cycle "is it" dies in a fold at $\alpha_c = 0.06279827$ (float64 multiplier 1 to $3 \times 10^{-13}$, next modulus 0.037; Figure 20): it meets an unstable 2-cycle, and both vanish. In the critical coordinate $u$ of the second iterate $G = F^2$, the fold's normal form is $u' = u + a\varepsilon + bu^2$ with $\varepsilon = \alpha - \alpha_c$; here $a = -4.834$ per unit $\alpha$ and $b = -25.4285$, so $ab = 122.93$. The stable branch gives an independent estimate: extrapolating its multipliers through $(1-\mu)^2/(4(\alpha_c - \alpha)) \to ab$ yields 123.1 with a quadratic fit (120.6 with a linear one). An independent implementation of the forward map and solver recovers $\alpha_c$ to $6 \times 10^{-15}$ and $a$ to $3 \times 10^{-12}$. Its $b$, from nested automatic differentiation, is $-25.42846$; our finite-difference value differs from it by $2.2 \times 10^{-6}$ relatively, which is the finite-step bias of the difference table. The resulting $ab = 122.927$ leaves every passage prediction of Table 8 unchanged.

**Controlled passages.** In the oriented coordinate $v = \mathrm{sign}(b)\, u$ of Appendix B, we start trajectories at $v = -U$ or 0 ($U = 0.1/|b|$) and count $G$-iterates until $v > U$. At four distances from the fold, the measured counts match the iterated normal form within one iterate (Table 8, Figure 21), and a transverse displacement of the same norm changes the count by at most one.

| $\varepsilon = \alpha - \alpha_c$ | full: measured / predicted | midpoint | full + transverse kick |
|---|---|---|---|
| $3 \times 10^{-6}$ | 144 / 144 | 73 / 74 | 143 / 144 |
| $1 \times 10^{-5}$ | 71 / 71 | 36 / 37 | 70 / 71 |
| $3 \times 10^{-5}$ | 34 / 34 | 17 / 18 | 33 / 34 |
| $1 \times 10^{-4}$ | 14 / 14 | 7 / 7 | 13 / 14 |

**Table 8:** Bottleneck passages ($G$-iterates). Predictions iterate $u' = u + a\varepsilon + bu^2$ with $a, b$ computed from the network's derivatives; no parameter is fitted.

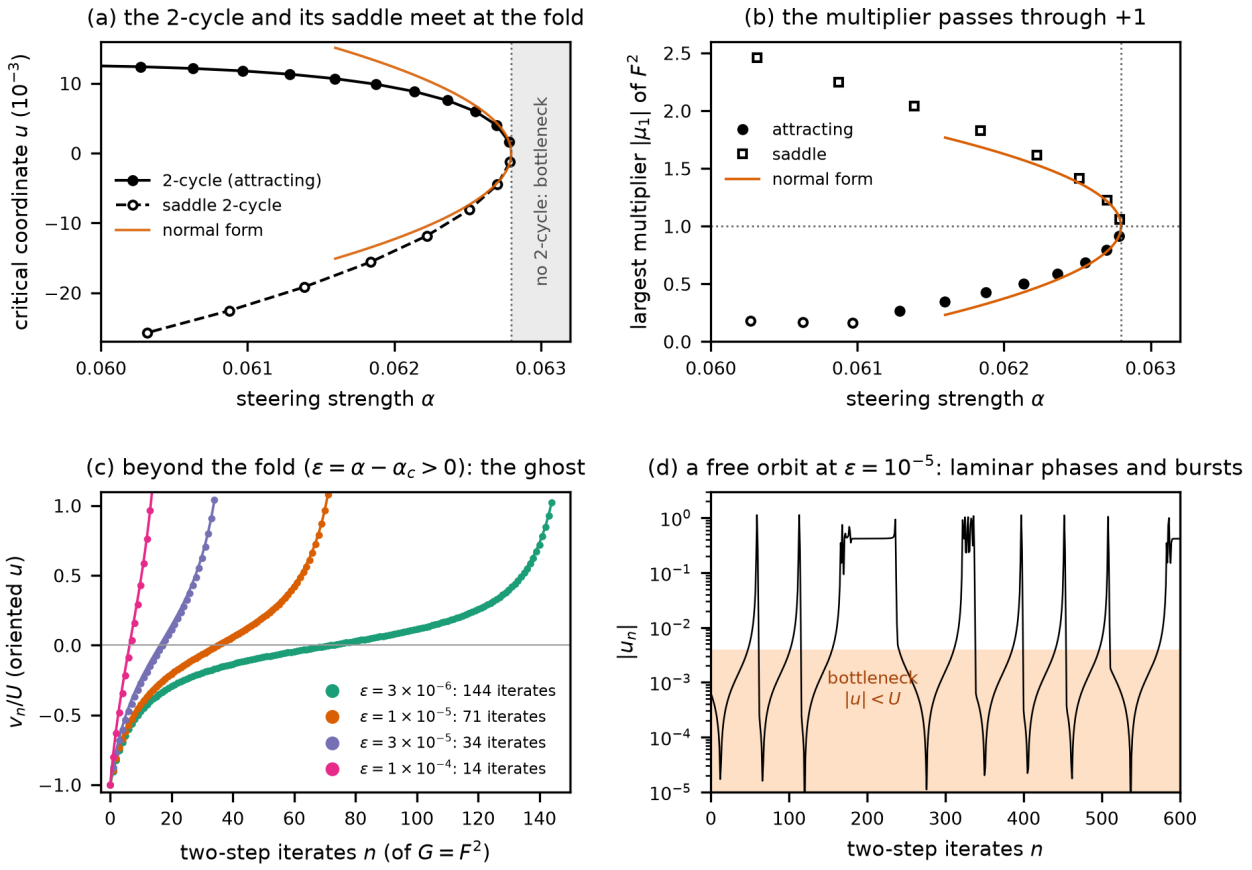


**Figure 20:** The fold behind the stripes: the 2-cycle "is it" at $\log_{10} T = -0.115$ (Qwen2.5-0.5B-Instruct, philosophy direction at layer 12). (a) Continued in $\alpha$, the attracting 2-cycle (filled) and its saddle partner (open) meet and vanish at $\alpha_c = 0.06279827$. The vertical coordinate is the projection $u$ of one point of each orbit on the fold's critical direction; orange, the normal form's fixed points $u^* = \pm\sqrt{|a|(\alpha_c - \alpha)/|b|}$. (b) The largest multiplier of $G = F^2$ on the two orbits reaches +1 at the fold, following the normal form's $1 \mp 2\sqrt{ab(\alpha_c - \alpha)}$ (open circles: a complex leading pair). (c) Beyond the fold the 2-cycle is gone, but its ghost, the slow bottleneck that a saddle-node bifurcation leaves behind [46, 47], slows the dynamics: controlled passages from the channel's entrance $v = -U$ to its exit $v = U$ ($v$ the oriented critical coordinate, $U = 0.1/|b|$), measured on the network (dots) and iterated from the normal form $v' = v + |a|\varepsilon + |b|v^2$ (lines), take 144, 71, 34 and 14 iterates, as predicted. (d) A free trajectory at $\varepsilon = 10^{-5}$ alternates between laminar phases in the bottleneck ($|u| < U$, shaded; 40 to 70 iterates each) and bursts away from it, the signature of type-I intermittency. Branch residuals, fold, normal form and passages in float64; branch multipliers in float32. `tools/plot_fold.py`.

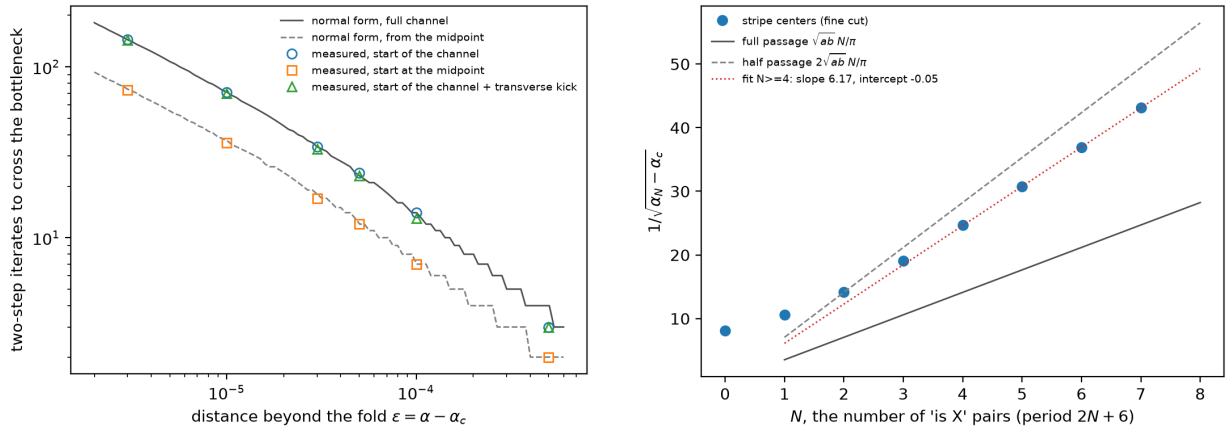


**Figure 21:** Bottleneck passages and the window law at the fold of the 2-cycle "is it" (Qwen2.5-0.5B-Instruct, philosophy direction at layer 12, $\log_{10} T = -0.115$). Left: measured passage times against the normal-form predictions. Right: the window law, with stripe centers plotted as $1/\sqrt{\alpha_N - \alpha_c}$ against the lap count $N$, together with the full- and half-passage predictions.

**Natural reinjection and the window law.** Free trajectories re-enter the channel slightly upstream of the bottleneck's middle ($v \approx -3 \times 10^{-4}$ to $-7 \times 10^{-4}$, in the same oriented coordinate). From each measured entry point, the normal form predicts the natural laminar durations within 4–8% for $\varepsilon \leq 10^{-4}$, and a natural passage lasts about 0.6 of a full one. The stripes therefore follow the $N^{-2}$ law of a saddle-node ghost [46, 47] (log-log slope $-2.00$, below), with about a third of the full-passage prefactor; the two fractions agree because the prefactor scales as the square of the passage fraction ($0.58^2 \approx 1/3$). The distances $d_N = \alpha_N - \alpha_c$ of stripe centers located on a float32 cut along $\log_{10} T = -0.115$ give $d_N N^2 = 0.0263$–$0.0265$ for $N = 4$–$7$ (log-log slope $-2.00$), compared with $\pi^2/(4ab) = 0.0201$ for a half passage. Two-step return maps of $p$("it") (Figure 22) show the near-tangency.

Numerically estimated stripe edges along $\log_{10} T = -0.115$ (Table 9) sharpen this picture. Each window is bounded by a fold, where its orbit is born, and by a flip. For periods 6–12 the fold faces away from the accumulation point. For periods 16–20 the sides are exchanged, and the period-14 window is bounded by flips on both sides. The fold edges of periods 16–20 follow $\alpha_N - \alpha_c = C/(N + N_0)^2$ with $C = 0.0266$ and $N_0 = 0.15$. Their slope, a rise of 6.13 per lap in $1/\sqrt{\alpha_N - \alpha_c}$, is 1.74 times the full-passage slope $\sqrt{ab}/\pi = 3.53$ of the normal form. That corresponds to an effective passage of 0.58 of a full one, which the measured natural reinjection gives independently.

| period | edge toward larger $\alpha$ | edge toward smaller $\alpha$ |
|---|---|---|
| 6 | fold 0.0790337 | flip 0.0766947 |
| 8 | fold 0.0726585 | flip 0.0706525 |
| 10 | fold 0.0684572 | flip 0.0670594 |
| 12 | fold 0.0658982 | flip 0.0651944 |
| 14 | flip 0.0645850 | flip 0.0642958 |
| 16 | flip 0.0639284 | fold 0.0638001 |
| 18 | flip 0.0635683 | fold 0.0635034 |
| 20 | flip 0.0633535 | fold 0.0633183 |

**Table 9:** Edges of the stripe windows along $\log_{10} T = -0.115$ ($\alpha_c = 0.0627983$), from the window centers of Table 6. Flips: critical multiplier a real $-1$ to $3 \times 10^{-10}$. Folds: the multiplier nearest $+1$ extrapolated to 1 through $(1-\mu)^2$, which is linear near a fold; last converged multiplier 0.991–0.998.

We tested whether the measured reinjection predicts windows beyond the fitted range. A model with one fixed entry point (the median measured one) and one lap offset fitted to the fold edges of periods 16–20 places the fold edges of periods 22–30 3 to 9 % closer to the fold than the constant-prefactor law. Both predictions were frozen before a float64 line of 3200 cells (spacing $10^{-7}$) located the windows. The measured edges follow the law within 3 % through period 30 (within 1 % at periods 22, 24 and 28) and fall outside the model's range except at period 30. So the law extrapolates, but one fixed reinjection point does not predict it. The measured entry points move with $\varepsilon$ ($-3 \times 10^{-4}$ to $-7 \times 10^{-4}$). The exponent of the law is near 2, its prefactor empirical. Over the fold edges of periods 16 to 32 ($N = 5$ to 13), $\ln(\alpha_N - \alpha_c)$ against $\ln N$ has slope $-2.00$, while a free fit of $C/(N + N_0)^\gamma$ with the offset $N_0$ also fitted is not well determined. The edges are located to within $2 \times 10^{-4}$ of their distances, so the misfits of 1 to 3 % of any such law are corrections to its asymptotic form, not noise: $\gamma$ runs from 2.13 to 2.45 as the smallest $N$ included rises from 5 to 8, while the fixed exponent 2 with an offset fits within 3 % (within 1 % from $N = 8$), so the data do not pin the exponent to exactly 2. At these distances, however, the bottleneck is not narrow compared with the counting window: its scale $\sqrt{|a|\varepsilon/|b|}$ is 1.35 to 3.51 times $U$, and a full passage lasts only 9 to 23 iterates of $G$. The windows therefore lie outside the asymptotic regime in which the normal form fixes the prefactor [48, 49], and the factor of about one third is a measured value, not a prediction. The same inversion of the bottleneck time gives the $N^{-2}$ tail of relaxation times over inputs found in a small task-trained looped transformer [20]; here $N$ counts the laps of a periodic window.

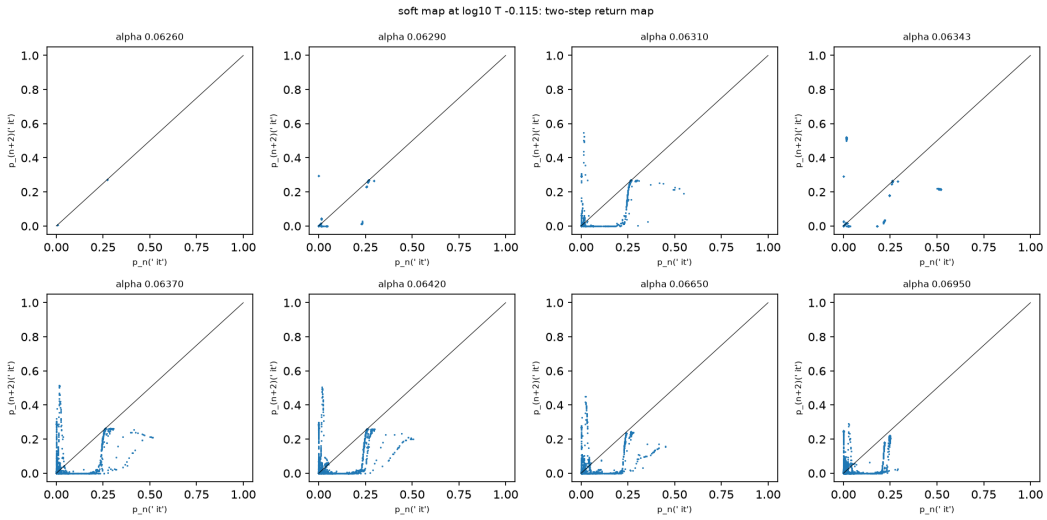


**Figure 22:** Two-step return maps of the probability of "it" near the fold of the 2-cycle "is it" (Qwen2.5-0.5B-Instruct, philosophy direction at layer 12), at increasing distance from the fold.

**A prospective test.** The same reduction, with both coefficients computed from the network's derivatives, predicts relaxation times and spectral gaps without fitting in a small task-trained looped transformer, where it was compared with measurements after the fact [20]. To test the normal form at folds that played no part in shaping the mechanism, an independent implementation located two new folds and computed their normal-form coefficients by nested automatic differentiation. All 24 passage predictions were pushed in a frozen design before any test trajectory was run. Target A is the 2-cycle's fold at a new temperature: $\log_{10} T = -0.140$, $\alpha_c = 0.0670549$, $a = -7.055$, $b = -24.927$. Target B is the fold of the period-8 orbit of Table 6, continued in temperature at $\alpha = 0.0717$: $\log_{10} T_c = -0.1033462$, $G = F^8$, $a = -11.900$ per unit $\log_{10} T$ and $b = -152.05$. Of the 24 forecasts (four distances and three entrances per target: the channel's start, its midpoint, and its start after a transverse kick), 23 fell within one iterate of the measured passages (Table 10). Seven of the 24 forecasts are five iterates or shorter, where a single iterate is 20 % or more of the passage; of the 17 longer forecasts, 16 fell within one iterate. The pre-specified criterion, that every row pass, failed by one row: for target A, midpoint entrance, $\varepsilon = 3 \times 10^{-6}$, the forecast was 61 and the measurement 59. All full-channel passages and all passages after a transverse kick were within one iterate. The misses are not symmetric: every one of the 17 nonzero residuals of a midpoint or kicked start, here and at the two folds tested before (Table 8 and Section 10), is negative, a consistent directional discrepancy across these related deterministic cases. They share coefficients and truncation errors and are not independent draws, so we attach no sign-test probability to them. The measured passages are consistently shorter than the iterated quadratic map, by one or two iterates. The design also froze a secondary comparison, the continuous passage integral $\int du/(a\varepsilon + bu^2)$ of the same normal form, whose closed form is the arctangent usually quoted for saddle-node bottlenecks. It came within one iterate of all 24 measurements (errors from $-0.41$ to $+0.92$) and gives 58.56 for the failing row. At that entrance the two forms already differed by 2.4 iterates before any measurement: iterating the quadratic map from the entrance $u_{\text{in}}$ to the exit $U$ adds about $\frac{1}{2}\ln[f(U)/f(u_{\text{in}})]$ steps to the integral, $f(u) = a\varepsilon + bu^2$, most at small $\varepsilon$ and at the midpoint entrance. Which of the two forms the full map follows is not settled by this test, and it does not let us promote the secondary comparison after the fact.

| $\varepsilon$ | target A ($G = F^2$): measured / predicted | target B ($G = F^8$): measured / predicted |
|---|---|---|
| $3 \times 10^{-6}$ | 118/118, **59**/**61**, 117/118 | 26/26, 13/14, 25/26 |
| $1 \times 10^{-5}$ | 56/56, 28/29, 56/56 | 10/10, 5/5, 10/10 |
| $3 \times 10^{-5}$ | 26/26, 13/14, 26/26 | 4/4, 2/2, 4/4 |
| $1 \times 10^{-4}$ | 10/10, 5/6, 10/10 | 2/2, 1/1, 2/2 |

**Table 10:** Prospective passage test at two folds that did not shape the mechanism. Each cell lists the full-channel, midpoint and full-plus-transverse entrances as measured / predicted $G$-iterates. Predictions come from the iterated quadratic normal form, with coefficients from an independent implementation, frozen before the test runs. Bold: the one row outside the one-iterate criterion. The shortest period-8 rows give only weak relative accuracy.

**A second prospective test.** The first test left open which form of the normal form the full map follows, and its shortest forecasts carried little weight. A second test, frozen before any trajectory was run, made the continuous passage integral its primary predictor and the discrete count its secondary, and chose the distances so that every full-channel forecast is at least 16 iterates and every midpoint forecast at least 8. Its two folds are again new to the tests. Target C is the 2-cycle's fold at $\log_{10} T = -0.200$: $\alpha_c = 0.0713690$, $a = -10.9505$, $b = -25.3300$. Target D is the fold of a period-6 orbit, a different family, at $\log_{10} T = -0.087439$: $\alpha_c = 0.0756329$, $G = F^6$, $a = -72.695$, $b = 72.237$. Distances $\varepsilon = q^2/(ab)$ with $q = 0.08$, 0.05, 0.03 and 0.018 give both targets the same forecasts (Table 11). At the 2-cycle's fold the integral held in all 12 rows, and every measured count was the forecast rounded up. At the period-6 fold the midpoint passages held as well, but passages from the channel's entrance came in short, by 0.40 to 5.74 iterates and more so closer to the fold, so the primary criterion failed, 18 of 24 rows (the discrete count passed 16 of 24). From the fold point to the exit the period-6 passages follow the normal form; it is the first half of the channel that is crossed faster. Terms beyond the quadratic normal form on that side, or the curvature of the center manifold at the entrance, are candidate causes that this test does not resolve. Over both frozen tests, the continuous integral came within one iterate of 42 of 48 passages; all six misses are entrance passages at the period-6 fold, short by 3.1 to 5.2 %. The sign hypothesis frozen with the design, that midpoint and kicked passages do not exceed the discrete count, held in all 16 rows (`codex/confirm-fold-2`).

| $q$ | forecast (full / mid) | discrete (full / mid) | C, 2-cycle: measured | D, period 6: measured |
|---|---|---|---|---|
| 0.08 | 22.40 / 11.20 | 23 / 12 | 23, 12, 23 | 22, 11, 22 |
| 0.05 | 44.29 / 22.14 | 45 / 23 | 45, 23, 45 | **42**, 22, **42** |
| 0.03 | 85.29 / 42.64 | 86 / 44 | 86, 43, 86 | **81**, 43, **82** |
| 0.018 | 154.74 / 77.37 | 155 / 80 | 155, 78, 155 | **149**, 78, **150** |

**Table 11:** Second prospective passage test, frozen before any passage was run. Forecast: the continuous passage integral $\int du/(a\varepsilon + bu^2)$ from the entrance to $U$ (primary); discrete: the iterated quadratic map (secondary). Measured $G$-iterates for the full-channel, midpoint and full-plus-transverse entrances. Bold: outside one iterate of the primary forecast.

## 9 A period-doubling cascade to chaos

The crescent of Figure 11 is a closed region in which the period-3 loop "\n\nThe existence" doubles inward. Along the cut $\log_{10} T = -0.14798$, the map's cells show period 3 over 25 columns, period

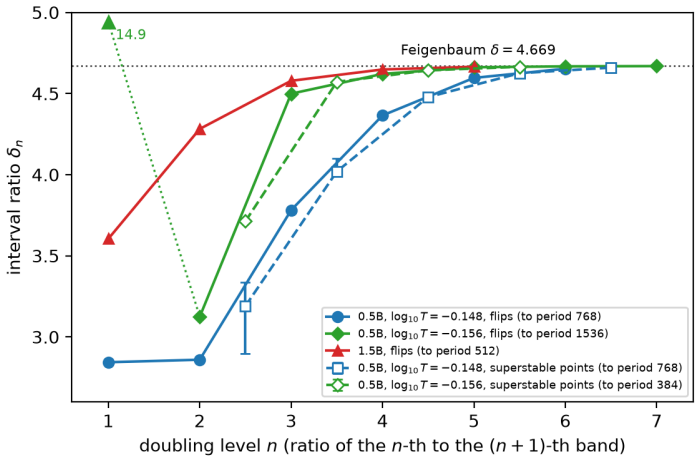


**Figure 23:** Finite-order interval ratios of the doubling sequences: the crescent of Qwen2.5-0.5B-Instruct (philosophy direction, layer 12), from flips and from superstable points (which reach period 768), and the route of Qwen2.5-1.5B (philosophy direction, layer 14; Figure 70), from flips. A superstable ratio spans half-bands, so it is plotted half a level after the flip ratio of its first band. Bars: worst-case ranges from the brackets of $s_{12}$ and $s_{24}$. At $\log_{10} T = -0.148$, and in the 1.5B model, the ratios rise toward Feigenbaum's $\delta$ from below; the last superstable ratio at $-0.148$ is within 0.21 % of it, and the last 1.5B ratio (4.665) within 0.1 %. At $\log_{10} T = -0.156$ the first ratio, 14.9, lies off the scale (arrow), and the later ratios approach $\delta$ from below, the last (4.6688) within 0.008 % of it, and within 0.015 % over the location uncertainty of the period-384 flip. Its first two superstable ratios carry no bars: the brackets of $s_{12}$ and $s_{24}$ allow $[3.40, 29.3]$ and $[1.01, 4.65]$. Each sequence ends at the deepest level computed: the flips at $-0.148$ at period 384, the superstable points at period 768, the 1.5B route at period 256, and the cut at $-0.156$, which we followed furthest, at the $768 \to 1536$ flip.

6 over about 14, period 12 over 4 and period 24 in one column, followed by a chaotic core. The doubled loops repeat the same leading tokens twice and four times, with alternating probabilities. Locating the flips along this cut in float64 (Appendix B), in the steering coordinate $\alpha$, gives Table 13. The first two ratios, $\delta_2 = 2.844$ and $\delta_3 = 2.859$ (indexed as in Table 13), are far from Feigenbaum's 4.6692, even though from the second flip on the orbits are effectively one-dimensional (next modulus 0.0023, $2 \times 10^{-6}$, $2 \times 10^{-12}$). The next ratio, $\delta_4 = 3.781$, is markedly larger. The first four flip parameters agree between completed float64 computations on a CPU and an H100 to $4 \times 10^{-15}$.

Continuing a just-born doubled orbit past period 48 failed: Newton's method slides onto the half-period orbit, which is also periodic with the doubled period. We therefore also located the superstable parameters $s_p$, where the critical multiplier vanishes in the middle of each band (Table 12). There the orbit attracts, so it can be reached by forward iteration and cannot slide onto its half-period parent. Through period 768 the superstable ratios are 3.19, 4.02, 4.478, 4.625 and 4.660. The last three come from parameters resolved to $10^{-14}$ and differ from Feigenbaum's value by 0.19, 0.044 and 0.0097; from 4.02 on, the distance shrinks by factors of 3.4, 4.3 and 4.6. The flip ratios 2.84, 2.86, 3.78, 4.36, 4.60 and 4.65 rise in step (Figure 23); the last three come from runs started inside the period-96 band, which located the flips of periods 96, 192 and 384 directly. The accumulation point lies near $\alpha_\infty \approx 0.0661250$. The early superstable values are less precise. The other computed Ritz values of the period-12 and period-24 orbits blur the root, so $s_{12}$ and $s_{24}$ are known only within brackets of $1.24 \times 10^{-5}$ and $6.9 \times 10^{-7}$, and the ratios 3.19 and 4.019 have worst-case ranges $[2.895, 3.338]$ and $[4.019, 4.101]$. $s_6$ is less precise still, and $s_3$ was not bracketed.

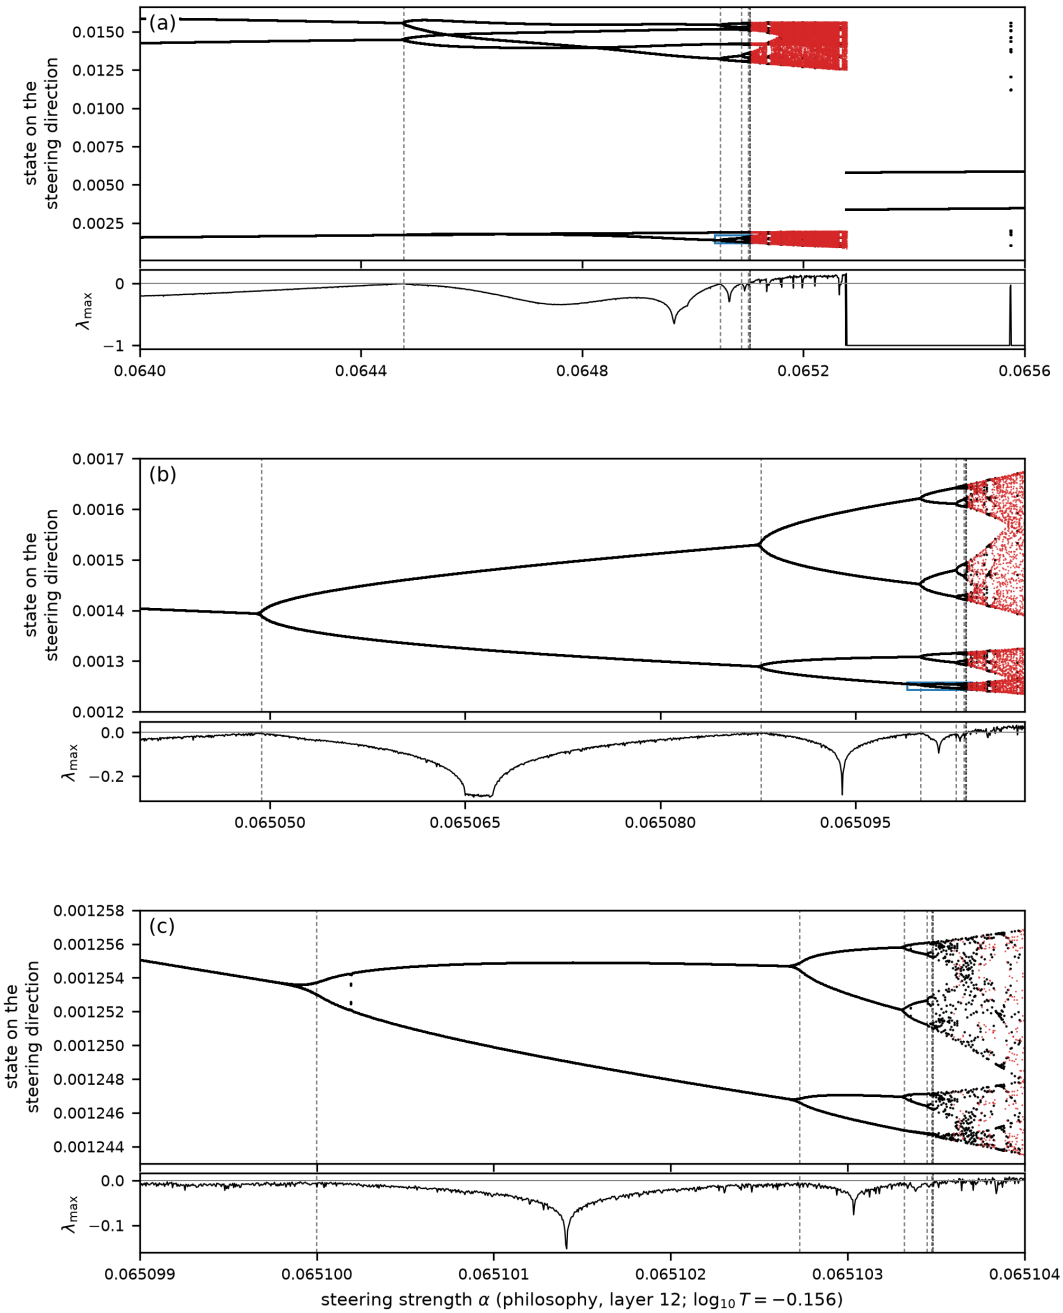


**Figure 24:** The Feigenbaum tree of the crescent cascade (Qwen2.5-0.5B-Instruct, philosophy direction at layer 12, $\log_{10} T = -0.156$): float64 line scans of 1600, 1360 and 1000 cells, each with 3000 transient steps and 256 recorded states projected on the unit steering direction (red: chaotic cells). (a) The whole cut: period 3 doubles into chaos, which ends at $\alpha = 0.065278$, where the attractor jumps to a strongly contracting period-2 orbit. (b, c) Zooms in both coordinates on the branch boxed in the panel above, showing the doublings $6 \to 12 \to 24 \to 48$ and $24 \to 48 \to 96 \to 192$. Dashed lines: flips located by Newton's method (Table 14); dotted line: the accumulation point estimated from the last two flips with $\delta$. Under each panel, the largest Lyapunov exponent touches zero at every flip and turns positive beyond the accumulation point. Near a flip the orbit converges slowly, so with 3000 transient steps each fork opens slightly before its Newton flip, by $8.4 \times 10^{-6}$ in $\alpha$ at the first and by at most $1.1 \times 10^{-6}$ at the later ones.

| period $p$ | superstable parameter $s_p$ | bracket width | ratio $\frac{s_p - s_{p/2}}{s_{2p} - s_p}$ |
|---|---|---|---|
| 12 | 0.0659717 | $1.24 \times 10^{-5}$ | |
| 24 | 0.06608014 | $6.9 \times 10^{-7}$ | 3.19 |
| 48 | 0.066114132784466 | $3.3 \times 10^{-15}$ | 4.019 |
| 96 | 0.066122589892689 | $7 \times 10^{-15}$ | 4.4779 |
| 192 | 0.066124478510077 | $6.4 \times 10^{-15}$ | 4.6251 |
| 384 | 0.066124886853811 | $5 \times 10^{-15}$ | 4.6595 |
| 768 | 0.066124974490236 | $4.1 \times 10^{-15}$ | |

**Table 12:** Superstable parameters of the crescent's doubling sequence along $\log_{10} T = -0.14798$: the critical multiplier of the period-$p$ orbit changes sign across the bracket, with Newton residuals below $3 \times 10^{-13}$ and the other computed Ritz moduli below $10^{-20}$ from period 96 to 384; at period 768 the residual is $1.2 \times 10^{-12}$ and the other moduli are below $3 \times 10^{-20}$. Brackets for periods 12 and 24 are the closest points where the critical multiplier is cleanly identified.

Why are the early ratios so small? We first considered a crossover. Softmax at temperature $T$ is a smoothed argmax, so the reduced one-dimensional map might have a nearly corner-like extremum, rounded only on a scale set by $T$. Early doublings would then see the corner, where ratios tend toward 2, and later ones the smooth quadratic core. This predicts smaller early ratios at lower temperature. We fixed that prediction before locating the flips along two lower cuts, and it fails. At $\log_{10} T = -0.156$ the first ratio is 14.93, five times its value at $-0.148$ (Table 14). At $-0.152$ the continued period-12 solution collapsed onto its period-6 parent near $\alpha \approx 0.0657$, and the forward search found no next flip. This is compatible with a doubling bubble, but we did not locate its reverse boundary or exclude a narrower cascade on that cut. The early ratios thus depend strongly on where a cut crosses the crescent, and we withdraw the crossover explanation. The later ratios at $-0.156$ behave as universality requires. The next ratios are 3.124, 4.4988, 4.6208, 4.6618, 4.6673 and 4.6688. Their deviations from $\delta = 4.6692$ are $-1.55$, $-0.17$, $-0.048$, $-0.0074$, $-0.0019$ and $-0.00036$; they keep one sign, from the third on each step closes the gap by a factor of 3.5 to 6.5 (the location uncertainty of the period-384 flip, given below, leaves the last factor undetermined), and Aitken's $\Delta^2$ extrapolation of the last three ratios gives 4.6694. Universality of this kind occurs in suitable strongly dissipative families of any dimension [50, 51]. The last ratio uses the flip of the period-768 orbit (the $768 \to 1536$ flip), located with $|\mu + 1| = 4.1 \times 10^{-7}$. The penultimate flip, of the period-384 orbit, approaches the precision floor of its multiplier, a product of 384 step Jacobians. On an H100 the computed $\mu + 1$ scatters by $1.8 \times 10^{-5}$ about a straight line near the root; under that local linear fit, the largest residual divided by the slope gives a location uncertainty of about $\pm 3.3 \times 10^{-13}$, an estimate rather than a certified bound. The workstation GPU located it at $\alpha = 0.06510347354866666$ with $|\mu + 1| = 4 \times 10^{-9}$, $9 \times 10^{-14}$ from the H100 estimate. Over that range the ratio $\delta_7$ lies between 4.6672 and 4.6674, $\delta_8$, the last ratio, between 4.6685 and 4.6692, and the extrapolated value between 4.6688 and 4.6702, an interval that contains $\delta$. The superstable points along the same cut, through period 384, give the ratios 10.21, 3.713, 4.572, 4.643 and 4.6646. Before computing them we fixed the prediction that the last two superstable ratios at a new temperature would lie within 5 % of $\delta$, in $[4.436, 4.902]$. At the original readout, through period 192, the point estimates 4.572 and 4.643 met it, but the bracket envelope of 4.572 did not; extending the computation to period 384 later gave the pair 4.643 and 4.6646, both inside the interval. The last, 4.6646, rests on parameters resolved to $5 \times 10^{-15}$ and differs from $\delta$ by 0.1 %. Over the corners of the brackets the one before lies in $[4.639, 4.647]$, limited by $s_{48}$, whose bracket is $2.4 \times 10^{-9}$ wide. The earlier ratio 4.572 depends on $s_{24}$, known only within a bracket of $5.9 \times 10^{-6}$

(worst-case range $[1.01, 4.65]$). Finite-order ratios also depend on the parameter coordinate, so only the trend of later ratios can test universality [23, 52, 53]. Three claims should be kept apart here. The map has a period-doubling cascade; its late finite-order ratios approach $\delta$ numerically, with the digits limited by the brackets above, since the last flips lie near the float64 floor of the multiplier computation; and Feigenbaum's theory explains such convergence for an effectively one-dimensional, unimodal return map, a hypothesis these ratios alone do not establish for this map.

| $n$ | orbit | flip parameter $\alpha_n$ | next modulus | ratio $\delta_n = \frac{\alpha_n - \alpha_{n-1}}{\alpha_{n+1} - \alpha_n}$ |
|---|---|---|---|---|
| 1 | $3 \to 6$ | 0.0654807769499 | 0.088 | |
| 2 | $6 \to 12$ | 0.0659055406325 | 0.0023 | 2.844 |
| 3 | $12 \to 24$ | 0.0660549041785 | $2.4 \times 10^{-6}$ | 2.859 |
| 4 | $24 \to 48$ | 0.0661071412523 | $2.3 \times 10^{-12}$ | 3.781 |
| 5 | $48 \to 96$ | 0.0661209563174 | $< 10^{-13}$ | 4.365 |
| 6 | $96 \to 192$ | 0.0661241213732 | $< 10^{-13}$ | 4.596 |
| 7 | $192 \to 384$ | 0.0661248100141 | $< 10^{-13}$ | 4.653 |
| 8 | $384 \to 768$ | 0.0661249580173 | $< 10^{-13}$ | |

**Table 13:** Flips of the crescent's period-doubling sequence along $\log_{10} T = -0.14798$. For the first five flips (H100) the critical Ritz value is real and differs from $-1$ by at most $4 \times 10^{-10}$, the Newton residuals are below $4 \times 10^{-13}$, and the other computed Ritz values lie inside the unit circle. The sixth flip was located at the precision floor of the period-96 multiplier: the critical value differs from $-1$ by $5.7 \times 10^{-7}$, its scatter between bracket points $10^{-13}$ apart is about $10^{-6}$, and the Newton residual is $5.5 \times 10^{-12}$; the location is uncertain by about $2 \times 10^{-12}$, which changes $\delta_5$ by less than $10^{-5}$. The seventh flip is clean (critical value $-1.000000016$, Newton residual $2.8 \times 10^{-12}$). The eighth was accepted at the precision floor of the period-384 multiplier: there the critical value differs from $-1$ by $5.3 \times 10^{-5}$ (acceptance threshold $10^{-4}$), bracket evaluations within $4 \times 10^{-12}$ of it scatter by about $10^{-4}$ in that difference, and the Newton residuals are below $4 \times 10^{-11}$. Its location is uncertain by about $4 \times 10^{-12}$, which changes $\delta_7$ by about $10^{-4}$. Feigenbaum's constant is $\delta = 4.6692\ldots$ [23]; for the logistic map the first ratios are 4.751, 4.656, 4.668. The first four parameters agree between the completed CPU and H100 computations to $4 \times 10^{-15}$. Superstable parameters (Table 12) extend the ratio sequence through period 768.

| $n$ | orbit | flip parameter $\alpha_n$ | next modulus | ratio $\delta_n$ |
|---|---|---|---|---|
| 1 | $3 \to 6$ | 0.0644766567385 | 0.12 | |
| 2 | $6 \to 12$ | 0.0650493555308 | 0.045 | 14.93 |
| 3 | $12 \to 24$ | 0.0650877194158 | $7.0 \times 10^{-5}$ | 3.124 |
| 4 | $24 \to 48$ | 0.0650999993318 | $4.3 \times 10^{-7}$ | 4.4988 |
| 5 | $48 \to 96$ | 0.0651027289524 | $1.8 \times 10^{-13}$ | 4.6208 |
| 6 | $96 \to 192$ | 0.0651033196816 | $2.9 \times 10^{-14}$ | 4.6618 |
| 7 | $192 \to 384$ | 0.0651034463988 | $1.5 \times 10^{-14}$ | 4.6673 |
| 8 | $384 \to 768$ | 0.0651034735487 | $3.2 \times 10^{-13}$ | 4.6688 |
| 9 | $768 \to 1536$ | 0.0651034793638 | $2.9 \times 10^{-14}$ | |

**Table 14:** Flips of the crescent's doubling sequence along $\log_{10} T = -0.156$, in float64. Flips 1–3 were computed on an H100 and flips 3–8 on a workstation GPU (NVIDIA RTX 2000 Ada); the two computations of flip 3 agree to $4 \times 10^{-16}$, and an H100 computation of flip 8 from its evaluations at the multiplier's precision floor lies $9 \times 10^{-14}$ away. Flip 9 was computed on an H100. Every critical multiplier is real; for flips 1–8 it differs from $-1$ by at most $5 \times 10^{-8}$, and for flip 9 by $4.1 \times 10^{-7}$.

Not every doubling leads to chaos. In the high-temperature region (Figure 58, Appendix E), along $\log_{10} T = 0.0319$, the period-2 loop "\n\nThe" flips at $\alpha = 0.0753534$ and its doubled loop at 0.0736921. These orbits are far from one-dimensional (next moduli 0.38 and 0.28). Toward smaller $\alpha$ the period-8 orbit does not double again: near $\alpha \approx 0.0705$ it merges back into the period-4 orbit. Along this cut it is therefore a period-doubling bubble, bounded by two flips of the period-4 orbit, not the start of a cascade to chaos.

| | offset | $\beta$ | amplitude ratio | doubled multiplier | $1 - 4\beta$ |
|---|---|---|---|---|---|
| period $2 \to 4$ | $2.5 \times 10^{-5}$ | 0.0092 | 1.005 | 0.96335 | 0.96320 |
| ($c = 6.49 \times 10^3$) | $1 \times 10^{-4}$ | 0.0364 | 1.020 | 0.8572 | 0.8545 |
| | $4 \times 10^{-4}$ | 0.1400 | 1.078 | 0.513 | 0.440 |
| period $4 \to 8$ | $2.5 \times 10^{-5}$ | 0.0175 | 1.003 | 0.92987 | 0.92983 |
| ($c = 1.24 \times 10^4$) | $1 \times 10^{-4}$ | 0.0685 | 1.012 | 0.7257 | 0.7260 |
| | $4 \times 10^{-4}$ | 0.2470 | 1.056 | complex | 0.012 |

**Table 15:** The flip normal form where the map is far from one-dimensional: the two flips of the high-temperature bubble (next moduli 0.38 and 0.28). At offsets below each flip in $\alpha$, $\beta = -\mu_p - 1$ from the period-$p$ orbit's multiplier; amplitude ratio: the doubled orbit's half-amplitude along the critical direction divided by the prediction $\sqrt{\beta/c}$; doubled multiplier: computed against the prediction $1 - 4\beta$. Both coefficients are positive (supercritical), as the stable doubled orbits require. Three of five offsets per flip are shown.

The local theory still applies here (Section 3). At each flip we computed the cubic coefficient of the flip normal form, $\eta \mapsto -(1+\beta)\eta + c\eta^3$ on the critical direction, from the dense monodromy and float64 directional derivatives (notation of Appendix B), $c = \ell^\top C(r,r,r)/6 + \ell^\top B(r, h_2)/2$ with $(I - M)h_2 = B(r,r)$ [42]. To leading order it predicts the doubled orbit without fitting: half-amplitude $\sqrt{\beta/c}\,(1 + O(\beta))$ along $r$ and multiplier $1 - 4\beta + O(\beta^2)$. At the smallest offset the amplitude ratios are 1.005 and 1.003, and the multipliers agree within $1.5 \times 10^{-4}$ and $5 \times 10^{-5}$; the larger discrepancies at larger offsets are consistent with higher-order corrections (Table 15). These finite comparisons support the leading-order prediction; they do not establish the order of the remainder. Figure 24 shows the cascade itself as a bifurcation diagram: in three nested zooms each

fork sits at a flip located independently by Newton's method, and the largest exponent touches zero at every flip and turns positive beyond the accumulation point. The route to chaos of Qwen2.5-1.5B (Figure 70) behaves the same way: its last ratio, 4.665, is within 0.1 % of $\delta$ (Figure 23).

## 10 Steering toward hostility

A second steering direction tests whether the organization of the philosophy-steered map is specific to one concept. We steer along a valence direction, the contrast of hostile statements against matched kind ones, built in the manner of contrastive activation addition [31]; its cosine with the gratitude direction is $-0.04$. Sampled self-dialogue under the same steering is a different system, with a growing context and sampling noise; we report that study separately and follow the direction here in the deterministic map.

**The hostility direction in the deterministic map.** Steering the soft-token map of Section 2 along the same hostility direction gives a plane with chaos (a positive largest exponent in 10 % of a coarse $128 \times 192$ float32 scan) and with periodic text loops that are hostile: "Yes, that's crap" (period 6), "a lie is" (3), "STUP…" (3), a loop on the Chinese word for insult and its 2-cycle, and others. They appear at $\alpha$ above about 0.035 (the insult loop) and above 0.065 (the rest). Around the period-6 loop the windows form a dome (Figure 25), and toward higher temperature its texts gain one "!Yes" after another (periods $6, 8, \ldots, 20$). In float64 the windows of periods 12 to 20 are born in folds on their low-temperature side and end in flips or $+1$ crossings on the other, like the stripes of Sections 7 and 8. The period-6 window ends in a fold at $\log_{10} T = -0.0991$, and the continuations of the period-8 and period-10 windows failed to converge.

The windows accumulate on the fold of the 2-cycle "!Yes" at $\log_{10} T_c = -0.0462465357$ ($\alpha = 0.083$; critical multiplier 0.9999999954, next modulus 0.050). From period 16 on, $1/\sqrt{\log_{10} T_c - \log_{10} T_{\text{fold}}}$ rises by 2.235 per lap. The fold's normal form ($a = -1.1683$, $b = 44.525$ with $\varepsilon$ in $\log_{10} T$) predicts $\sqrt{|ab|}/\pi = 2.296$ per lap for full passages through the bottleneck, within 3 % and without a fitted parameter. An independent float64 forward and automatic-differentiation implementation reproduces this fold (location to $6 \times 10^{-10}$ relative, a simple real $+1$ multiplier with next modulus 0.050) and its coefficients ($ab$ to 8 parts per million). In that implementation, controlled passages from fixed entrances at $\log_{10} T$ offsets $-10^{-5}$, $-3 \times 10^{-5}$ and $-10^{-4}$ took 119/59, 61/31 and 27/13 iterates of $F^2$ (full channel/from its midpoint), against prospectively frozen quadratic forecasts of 118/61, 61/32 and 27/14. Five of the six are within one iterate; the smallest-offset midpoint missed by two, failing the frozen all-six criterion. Finite-endpoint (arctan) forecasts, also frozen, were within 0.923 iterates. These are controlled local transits. At the window distances the finite-channel correction to the asymptotic passage time is large, so the agreement of the window slope with the full-passage coefficient does not by itself show where the natural dynamics reinjects. The same type-I intermittency mechanism as in the philosophy-steered map is thus consistent with the hostile windows' organization, which the local fold normal form supports; the controlled passages do not identify the natural reinjection or the global organization.

A second region, near $(\alpha, \log_{10} T) = (0.06, 0.20)$, shows arms of period-7 and period-8 windows spiralling around the insult loop. In float64 the insult fixed point doubles into a 2-cycle at $\alpha \approx 0.041$ and 0.079, and that 2-cycle has a Neimark–Sacker bifurcation in the spiral region: at $\alpha = 0.062$ its complex pair crosses the unit circle near $\log_{10} T = 0.1656$, turning 0.12 of a revolution per step of the 2-cycle. This does not explain the arms. The two invariant circles born at a 2-cycle's Neimark–Sacker point are exchanged by the map, so orbits locked on them have even periods, near 16 for this rotation, whereas the arms include period 7; and of four float32 arm cells, only one kept

its period in float64. In dissipative flows, windows wind in nested spirals around periodicity hubs [54], and in the Rössler system the hub's shape was traced to a conjugacy to unimodal maps in part of its parameter plane [55]; we have not tested whether the arms here wind around such a hub. Float64 zooms show more structure. In one arm a period-7 domain carries period-14 crescents with period-28 cores along its lower edge, between period-1 and period-2 regions and a chaotic band. In the cascade the windows are nested crescent arcs inside a dome bounded by the "!Yes" 2-cycle region, and near $(\alpha, \log_{10} T) = (0.087, -0.069)$ the period-12 and period-14 windows bend into hooked, nested arches. These are the map-level features that accompany shrimp (a periodic body with doubling crescents; hooked windows).

In float64 the period-7 body is bounded by folds. At $\log_{10} T = 0.1925$ the orbit exists between $\alpha = 0.065966$ and 0.071188, and at $\alpha = 0.066$ it ends in a fold at $\log_{10} T = 0.19263$. Below that, the multiplier passes through $-1$ twice (bracketed in $[0.19176, 0.19196]$ and $[0.18931, 0.19036]$), so the period-14 crescent is a doubling bubble. Further down, the branch folds twice (0.18797 and 0.18922, the second located by continuing its fold curve; three coexisting period-7 orbits in between) before a third flip. All crossings are simple (next modulus below $1.5 \times 10^{-3}$). An S-shaped pair of folds is what a cusp of the fold curves leaves on a nearby cut. When these boundaries are continued in the plane in float64 (Figure 28), each of the two fold curves reverses its parameter tangent once. There, as the fold condition requires, the oriented quadratic coefficient $b$ of the fold's normal form passes through zero; what makes such a point a cusp is that the cubic coefficient $c$ and the unfolding determinant $\det K$ are nonzero there (the cusp test, Appendix E) (upper fold: $-23.9$ to $+244.6$ between adjacent points, with $a \approx 2.0$; lower fold: $+31.2$ to $-58.7$, with $a \approx 0.55$) while $a$ stays away from zero. Located along the curves, the two cusps lie at $(\alpha, \log_{10} T) = (0.067213, 0.198983)$ and $(0.066611, 0.189382)$. There $b \operatorname{sign} a$ is below $1.3 \times 10^{-5}$ of its bracket values, $c = -1.41 \times 10^6$ and $-5.61 \times 10^5$, and $\det K = 58.2$ and 55.2, all evaluated at the located points. The flip curve of the period-14 bubble lies inside the body and closes around the map's period-14 cells. The cubic coefficient is nonzero at the points that bracket both sign changes: $c \approx -1.4 \times 10^6$ to $-2.0 \times 10^6$ (step agreement 5 %; the smallest steps converge like the square of the step, and extrapolation leaves the sign) and $-5.8 \times 10^5$ to $-5.3 \times 10^5$. This supports nondegenerate cusps inside both brackets, and $c < 0$ agrees with the three coexisting period-7 orbits, two of them stable, found between the S-shaped folds. At a fold point near the lower cusp (where $b = 31.4$) the estimated unfolding is nonsingular too ($\det K = 53.5$ in the same coordinates, singular values 262 and 0.20). Its local predictions at six frozen offsets matched the orbits that Newton solves seeded at the predicted roots and the base state recovered: in number at all six and in stability at five. The miss, at the largest offset beyond the edge of the region with three orbits, marks the range of the cubic model. The hostile period-7 body thus has the same skeleton as the period-6 window of Appendix E.

Its interior is shrimp-like too. At $\log_{10} T = 0.1830$, float64 bifurcation diagrams through the body (Figure 26; 1400 cells per line) show the period-7 orbit doubling to periods 14 and 28 and entering chaos (largest exponent up to $+0.1$) for $\alpha \approx 0.0659$–$0.0673$. Windows of periods 28, 35 and 42 sit inside the chaotic band, and the orbit then undoubles through 28 and 14 back to 7; the exponent touches zero at every doubling. Newton's method converges at map cells to primitive orbits of periods 14, 28 and 21 (residuals $3 \times 10^{-15}$, $2 \times 10^{-14}$ and $5 \times 10^{-13}$; spectral radii 0.08, $4 \times 10^{-4}$ and 0.006). Periods 21, 35 and 42 are three, five and six times the body's period, as expected for the windows that renormalization places inside the band chaos of a period-7 cascade. Continued in temperature, the period-14 orbit flips into period 28 near $\log_{10} T = 0.1841$ and back near 0.1857, the two ends of a doubling bubble that holds period 28 and chaos. Lower down, its branch is S-shaped (folds near 0.1824 and 0.18244, with three coexisting period-14 orbits between them) before another flip near 0.1819. All these crossings are simple (next modulus below $4 \times 10^{-5}$). A $160^2$ float64 zoom of the lower body (Figure 68) shows this anatomy in the plane. The period-14

domain encloses a period-28 ring around a chaotic core. Period-21 windows sit in the chaotic region as thin crescents with legs, and curves of very negative exponent, where the leading multiplier is small (candidate superstable curves), run through the windows, as superstable lines run through the windows of low-dimensional maps. In this zoom 18 % of cells are chaotic.

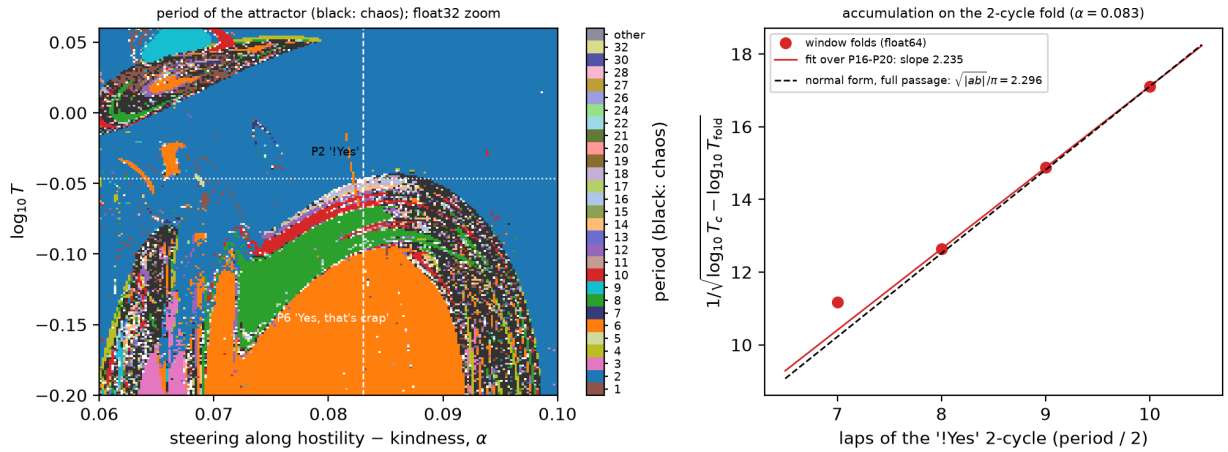


**Figure 25:** The hostility-steered soft-token map of Qwen2.5-0.5B-Instruct (layer 12). Left: period of the attractor in a float32 zoom (black: chaos), with the period-6 "Yes, that's crap" dome and its period-adding bands; dashed, the cut at $\alpha = 0.083$; dotted, the float64 fold of the "!Yes" 2-cycle. Right: float64 fold edges of the windows (periods 14–20) against the number of "!Yes" laps; the dashed line is the normal-form prediction for full passages, anchored at the last window.

**No one-dimensional shrimp center.** In a shrimp of a one-dimensional map, two superstable curves of the window's orbit cross at a doubly superstable center, the head [56, 57]. We continued one period-7 orbit over a $31 \times 31$ grid of the body's upper part and followed the sign of its leading real multiplier (Figure 27). The curves where that sign changes between cells are candidate superstable curves: the modulus is small along them, but a sign change between cells can also come from two real multipliers of opposite sign exchanging dominance. They form two arcs that approach each other near $(\alpha, \log_{10} T) = (0.0700, 0.206)$ and turn away without crossing at this resolution ($10^{-4}$ in $\alpha$, $4.3 \times 10^{-4}$ in $\log_{10} T$). A finer grid of that approach (1155 cells, about 2 times finer in $\alpha$ and 6 times finer in $\log_{10} T$) shows why. There the leading multiplier is tiny (median modulus $9 \times 10^{-4}$) and as small as the next one, and in 221 cells the two form a complex pair, in two wedges that flank the gap. On this sampled approach the two computed leading multipliers exchange dominance and form a complex pair, so the sign of a leading real multiplier no longer defines a scalar superstable curve there. Where a one-dimensional map would place its doubly superstable center, the orbit's local linearization has two comparable directions; whether the dynamics there reduces to an effectively two-dimensional map is not tested. Next to the body, the 7-step return maps of chaotic cells have a coarse one-extremum shape in every phase: one interior extremum when the points are binned into 16 intervals, while finer partitions keep extra extrema, especially in phases 4 and 5, which we do not attribute to noise. In two phases the points split into two thin strands, an observation of the projection that does not establish a second invariant dimension (Figure 65). Cobwebs on these maps show the doubling cascade and the chaos as on a one-humped interval map (Figure 66). On the tracked branch and in the sampled region, the body is therefore not the shrimp of a one-dimensional map. In the two-dimensional theory of Façanha et al. the head is not generic (Section 11); arcs that

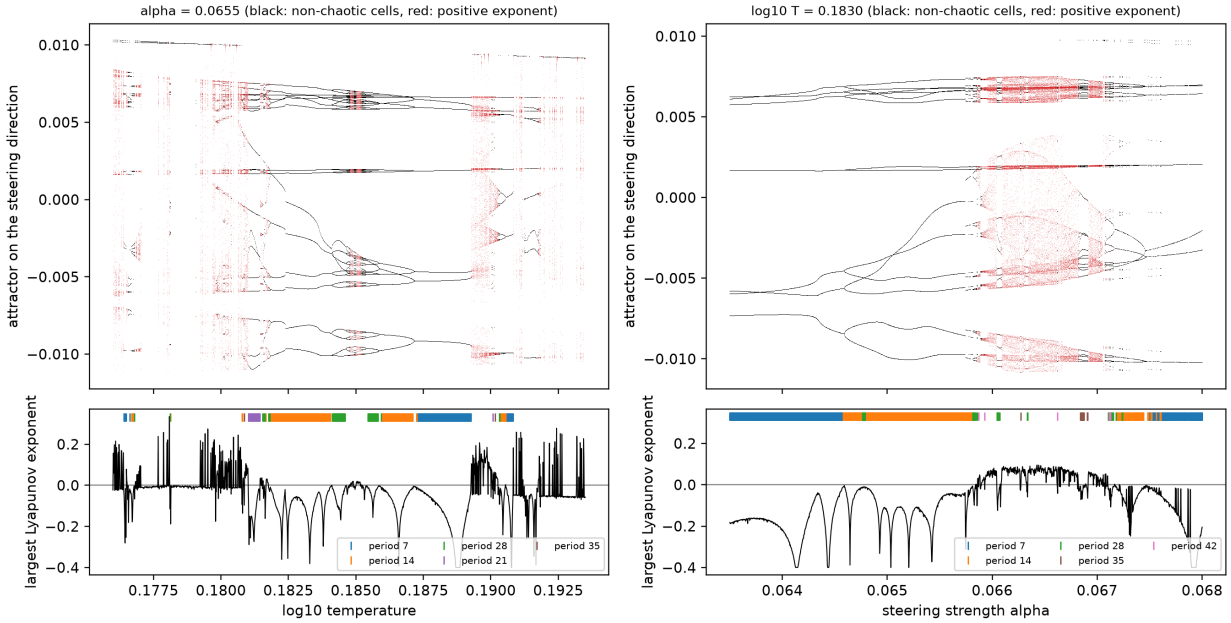


**Figure 26:** Inside the hostile period-7 body (Qwen2.5-0.5B-Instruct, hostility direction at layer 12): float64 bifurcation diagrams along temperature at $\alpha = 0.0655$ (left) and along the steering strength at $\log_{10} T = 0.1830$ (right). Top: the last 160 states of the attractor reached from the fixed start, projected on the steering direction (red: cells with a positive largest exponent). Bottom: largest Lyapunov exponent, with the cells of periods 7, 14, 21, 28, 35 and 42 marked (cells of other periods are not marked). On the right, period 7 doubles to 14 and 28, enters chaos with windows of periods 28, 35 and 42, and undoubles back to 7. Labels come from 400 measured steps after 1000 transient steps; with 2000 measured steps at two twin offsets, 135 of the 235 red cells on the left stay chaotic and 91 are periodic (Appendix K).

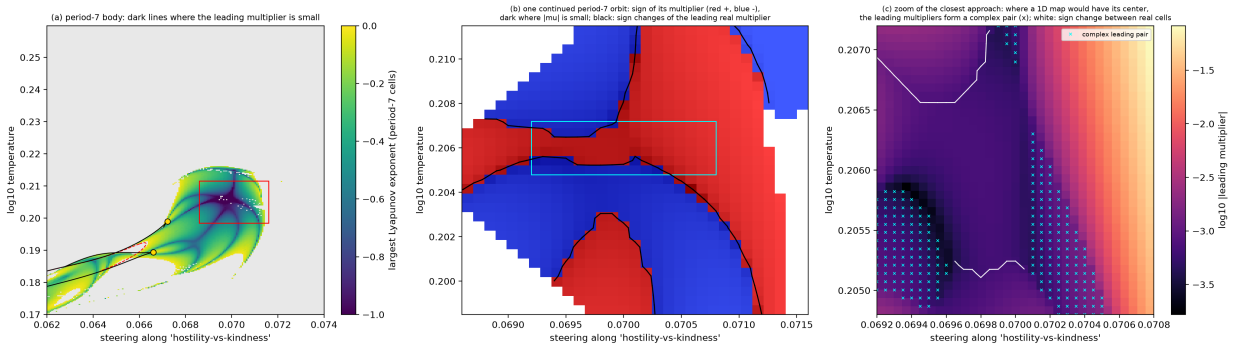


**Figure 27:** Small-multiplier structure of the hostile period-7 body (Qwen2.5-0.5B-Instruct, hostility direction at layer 12, float64). (a) Largest Lyapunov exponent of the period-7 cells, with fold (black) and flip (red, dashed) curves and the two located cusps (gold); dark lines mark a small leading multiplier. (b) One period-7 orbit continued over the red box of (a): sign of its leading multiplier (red positive, blue negative), dark where it is small, and the curves where that sign changes between cells (black). These are candidate superstable curves: the modulus is small along them, but a sign change between cells can also come from two real multipliers exchanging dominance. The two arcs approach near $(0.0700, 0.206)$ without crossing, a Type-B-like geometry. (c) Finer zoom of the cyan box of (b) (about 2 times finer in $\alpha$, 6 times in $\log_{10} T$): logarithm of the leading multiplier's modulus. Crosses mark cells where the two leading multipliers form a complex pair; white segments mark sign changes between cells with a real leading multiplier. Where a one-dimensional map would have its center, the orbit's linearization has two comparable leading directions.

turn away give a Type-B-like geometry, but they follow the sign of the leading real multiplier, not the trace that the theory uses, so this is a comparison, not a test.

**Chaos behind a repeating text.** The text records less than the loop feeds back. What returns at each step is the expected embedding under the whole next-token distribution; the printed token is only that distribution's most probable entry. A repeating text therefore says that the same token wins at each position of the repetition, not that the distribution repeats. Along the temperature line of Figure 26 (left), a longer test (2000 measured steps after 1000 transient steps, twins at offsets $10^{-6}$ and $10^{-9}$, whose exponents agree to within 0.0031 in every chaotic cell) finds 182 chaotic cells among 1400 between $\log_{10} T = 0.176$ and 0.191. In 65 of them the leading token repeats exactly for all 2000 steps while the state moves chaotically; in 59 of these the period of the text is a multiple of 7, most often 7 or 28. Figure 29 shows the strongest case ($\log_{10} T = 0.18995$, largest exponent 0.091 per step at both offsets). Its 2000 sampled states fall into seven separated groups, one for each position in the seven-token text, visited in a fixed order and at least 0.098 of the state norm apart (a property of the samples, not a proof of separated invariant sets), and each group lies inside one cell of the partition by leading token, so the text `I!Yes heels`↩↩`pee`↩↩ repeats at every one of the 2000 steps we followed. Within each group the most probable token never changes, but the probabilities do: at the last position of the text, the probability of the double line break, which wins there, takes values between 0.235 and 0.254 and does not repeat over the 2000 steps. This is band chaos, the regime of a chaotic attractor that is a finite union of pieces visited cyclically [58, 59]. Over the measured horizon, the periodic sequence of leading tokens does not reveal the nonperiodic state dynamics: the finite record of leading tokens hides the variability of the states and their positive finite-time growth. In the terms of symbolic dynamics, this is consistent with a partition of the state space by leading token that is not generating on this banded attractor, but a finite record cannot establish that property, which concerns infinite itineraries. A periodic text can hide chaotic dynamics. Inside a group the sampled states lie close to a curve (a strongly anisotropic cloud). Read once per repetition

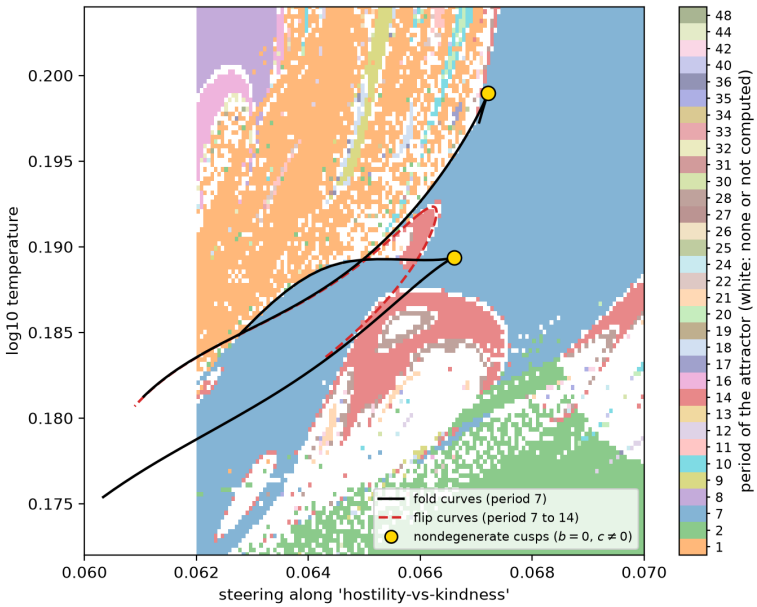


**Figure 28:** The period-7 body of the spiral region (Qwen2.5-0.5B-Instruct, hostility direction at layer 12): attractor periods of a float64 zoom (white at $\alpha < 0.062$: outside the zoom), the float64 fold curves of the period-7 orbit (black) and the flip curves into period 14 (red, dashed), with the two located cusps (gold).

through the probability of the last token, the sampled return relation is well approximated, on the sampled range, by a smooth map with a single quadratic maximum, the shape of the logistic map: a polynomial of degree 8 fits it to $4 \times 10^{-4}$ of its range, and the fitted map's Lyapunov exponent, 0.647 per repetition, is within 2 % of the full map's 0.636 per seven steps, measured with twin trajectories in all 896 dimensions. On their sampled ranges, the scalar approximation fits most of the cascade's cells. Rerun with the leading-token sequences saved, 62 of the 65 cells are again chaotic behind a repeating text, and in every one of them several phases of the text (a median of ten) give single-valued return maps; in 59 cells the best-fitting phase has a single interior stationary point (a maximum in 36, a minimum in 23). If the dynamics were exactly one-dimensional and each phase's probability a smooth invertible coordinate on it, all single-valued phases would give the same asymptotic exponent, since exponents do not change under such a change of coordinates. We therefore fit each phase's map by a polynomial whose degree is chosen by cross-validation over random folds of the return-map pairs, and take the median over the phases. It matches the full map's exponent within 10 % in 51 of the 62 cells (median discrepancy 3.7 %; within 10 % in 23 of the 24 cells with seven-token text, which give 285 repetitions in 2000 steps; Figure 67). This analysis was adopted after we inspected an outlier of our first, pre-specified analysis (a fixed degree of 8 at the single best-fitting phase), which gave 49 of 62 and underfitted one cell whose maps are steep and have two turning points; we report both. An exploratory temporal split (fit on the first 60 % of each record, test on the last 30 %) gives small value-prediction errors at the best scalar phase, chosen on the test segment itself, but in 30 of 61 cells two- or three-delay predictors improve the held-out error by 20 % or more, which the pre-stated rule counts against scalar sufficiency. These results support an empirical scalar description, not a proved one-dimensional reduction: a low-residual fit does not show that the observable is invertible, and even exact agreement of exponents would not establish a one-dimensional invariant curve (two uncoupled logistic maps observed through one coordinate agree in the same way). An independent implementation reproduced the strongest

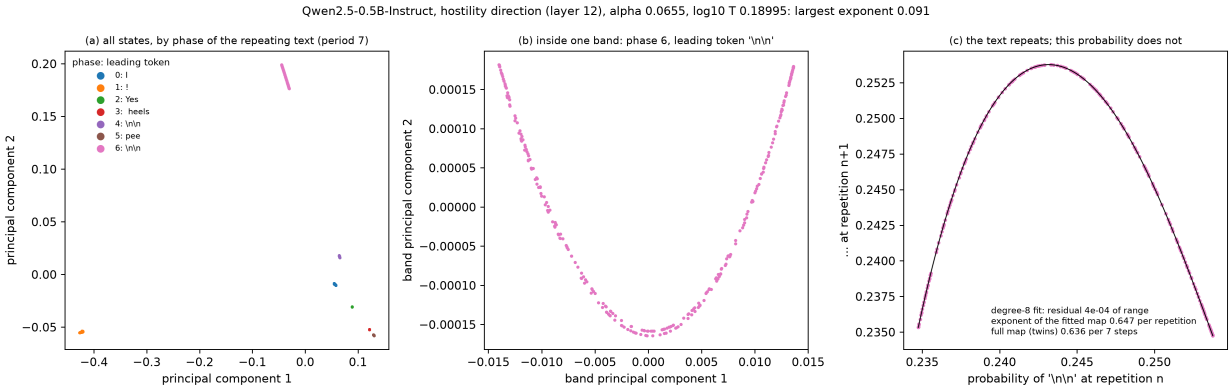


**Figure 29:** Chaos behind a repeating text, a periodic text on a chaotic orbit: the soft-token map of Qwen2.5-0.5B-Instruct steered along hostility at layer 12 ($\alpha = 0.0655$, $\log_{10} T = 0.18995$; float64, 2000 steps after 1000 transient steps). At every step the most probable token follows the same seven-token cycle, `I`, `!`, `Yes`, `heels`, ↩↩, `pee`, ↩↩, while the largest Lyapunov exponent is 0.091 per step: the token that wins repeats, but the probabilities behind it, which the loop feeds back, do not. (a) All states on their first two principal components, colored by their position in the text: seven separated sampled clouds. (b) The widest cloud (the last position, whose most probable token is a double line break) on its own principal components: the sampled states lie close to a curve. (c) The probability of that token, which stays between 0.235 and 0.254 and does not repeat over the 2000 steps, at one repetition of the text against the next: the points fall on a single hump (black: a fitted polynomial of degree 8), and the fitted map's Lyapunov exponent, 0.647 per repetition, is within 2 % of the full map's 0.636 per seven steps.

cell (the same leading token at all 2000 steps; exponent 0.089 against our 0.091; scalar discrepancy +2.3 % under the first rule and +1.5 % under the amended one) and both cross-cell counts (49 and 51 of 62). At two further cells it chose, it found good agreement after the amendment in one (text period 10, +0.2 %, although its fitted maps have both a maximum and a minimum) and a persistent discrepancy of about 18 % in the other (period 28), despite a small value error. These are the chaotic bands that follow a period-doubling cascade, and a smooth unimodal map is the setting of Feigenbaum's universality [23]; a fitted maximum on the sampled range does not by itself establish that theorem's hypotheses, and we have shown the scalar approximation for this cascade only. A reader of the text sees a loop. Only the probabilities, or the state, reveal the chaos.

## 11 Cusps and shrimp-like windows

The fold of Section 8 is one boundary of one window. Continuing such boundaries through the parameter plane, and following the orbits inside them, shows how the windows of the maps are organized, and which parts of that organization are low-dimensional. Appendices E and F report the continued curves and cusps of the period-4, -5 and -6 windows in full, and Section 10 those of the period-7 body; this section collects what they establish about the shape of the windows, after the cascade of Section 9 and the hostile windows of Section 10.

**Fold curves with cusps.** Fold and flip curves continued in float64 with the minimally augmented systems of Appendix B keep their critical multipliers at +1 and −1 (Appendix E). The fold curve of the 2-cycle "is it" traces the boundary of the period-2 region on which the stripes accumulate, as the mechanism of Section 8 requires. The fold curves of a period-6 window, of a hostile period-7 window, of a period-4 window and of a period-5 window steered at two depths bend back on themselves. On

the eleven fold curves we continued, 13 of the 17 reversals of the parameter tangent are located cusps: the oriented quadratic coefficient of the fold's normal form changes sign there, while the cubic coefficient stays nonzero and the two-parameter unfolding is regular. The other four, all found on 18 October, are flagged by the continuation but not located: one on the lower-left leg's own fold curve, one on an extension of the period-5 window's second fold curve, and two on a partial trace of a fold curve of the same window at $\log_{10} T = -0.105$. This is not a global count of cusps. Near a cusp with negative cubic coefficient, three orbits of the same period coexist between the two fold branches, two of them stable. At a fold point near one cusp in each of two windows, the local cubic model, frozen before solving, matched the number of orbits that Newton solves seeded at its predicted roots recovered at all twelve parameter offsets, and their stability at eleven; the search was not exhaustive.

**What the shrimp-like shapes are.** The maps show bodies with legs, hooks and crescents that resemble the shrimp-shaped domains that Gallas found in the parameter plane of the Hénon map: a main body of period $k$, followed by domains of periods $k \cdot 2^n$, with thin legs [4]. They are made of the bifurcation curves of periodic windows; where two windows overlap, their strips can cross in an X (Appendix E). A periodic window is the region where one periodic orbit attracts. It is bounded by fold curves, where the orbit is born or dies together with a saddle (multiplier $+1$), and flip curves, where it doubles (multiplier $-1$); beyond the flips lie the period-doubled shells. In a one-dimensional map the multiplier is $+1$ on a fold edge and $-1$ on a flip edge, so it vanishes in between: every path across a window from a fold edge to a flip edge crosses a superstable curve. In the soft-token maps the dark lines of strongly negative exponent, where the leading multiplier is small, are the candidates for such curves. Gallas's dissection of one-dimensional shrimps names the parts of a cell (Figure 40a) [56]. The superstable curves of the map's two critical points cross at the head, where the orbit passes both critical points at once. At the end of the cell two legs, each a thin strip between a fold and a flip curve, cross in a kite. The kite begins at a cusp, where the two legs' fold curves meet; inside it two attracting orbits of the same period coexist, and their superstable curves cross at the tail.

Mira and coworkers sort the organizations around a cusp of a fold curve in two-dimensional maps into three kinds [60–62]. Passing through the cusp into its wedge splits an attracting node into a saddle and two nodes in a crossroad area, where the flip curves of the cusp's two branches cross, as in Gallas's kite, and in a spring area, where a flip curve loops around the cusp. It splits a saddle into a node and two saddles in a saddle area, where the attracting orbit exists only inside the wedge. The sign of the cubic coefficient $c$ of the fold's normal form decides between the two splittings: $c < 0$ for crossroad and spring areas, $c > 0$ for the saddle area (Figure 30). Mira also noted that in two dimensions the attracting node becomes a focus, with a complex pair of multipliers, away from the fold and flip curves. In a two-dimensional map whose Jacobian is never singular, such as Hénon's, no multiplier can vanish. There the curves on which the trace of the cycle's two multipliers vanishes take the place of the superstable curves, and the head is no longer generic. Façanha, Oldeman and Glass found two unfoldings: in both the crossing at the tail survives, while at the head the curves either close into a loop (their Type A) or approach each other and turn away (Type B) [57].

**The skeleton of one window.** The plane steered at two depths (Section 6) holds a period-5 window (Figure 38). A $31 \times 31$ grid of the window's continued orbit (Appendix F) left two anomalies, signs of folds it could not resolve, so we continued the window's fold and flip curves in float64. One fold curve bounds the body on its right, runs over its top and along one side of the upper and lower-right legs. Flip curves bound the body's upper-left and lower sides and the other side of each

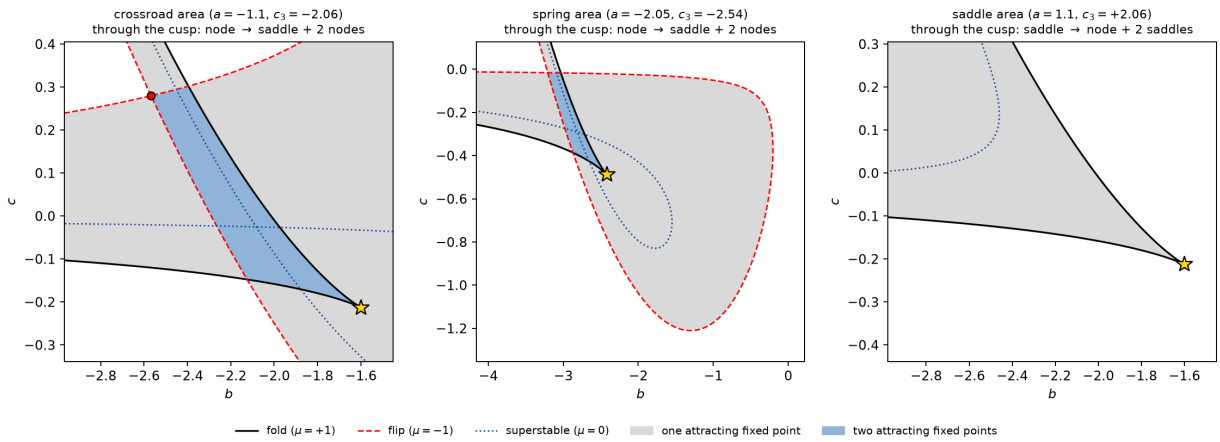


**Figure 30:** The three kinds of organization around a cusp of a fold curve, computed from the quartic map of Carcassès et al. [61], $x \mapsto c + (1+a)x + bx^2 + x^4$, in planes of $b$ and $c$ at fixed $a$, as they drew them (gray: one attracting fixed point; blue: two). The cusp (gold) lies at the fixed point $x = t$ with $a = 8t^3$, and $c_3 = 4t$ is the cubic coefficient of its fold normal form (written $c$ in the text). Left, $a = -1.1$: a crossroad area; passing through the cusp splits a node into a saddle and two nodes, and the two attracting fixed points coexist in a kite whose far corner is the crossing of the flip curves of the cusp's two branches (red dot). Middle, $a = -2.05$: a spring area; a flip curve closes into a loop that winds once around the cusp (the loop forms at $a = -2$, the codimension-three point $a_7$ of Carcassès et al.). Right, $a = +1.1$: the saddle kind; passing through the cusp splits a saddle into a node and two saddles, and the attracting fixed point exists only inside the cusp's wedge. Each frame contains the whole defining structure. Period-2 curves are not drawn.

leg, so each leg lies between a fold curve and a flip curve, as in Gallas's anatomy, and beyond the flips lie shells of periods 10 and 20. Where the upper leg leaves the body, the fold curve has two located cusps that share a segment of the curve, and its other two branches cross (Figure 38d). At the crossing the two arms are folds of two different period-5 orbits with the same token loop (their states differ by about 4 %). A second fold curve, on the far left, where the orbit dies after regaining stability beyond a doubling bubble, has two more located cusps, which also share a segment, and its other two branches cross as well, again as folds of two different period-5 orbits (states about 9 % apart; Figure 38a). Along the curves continued on 15 October the critical multiplier stays at $+1$ or $-1$ to within $1.2 \times 10^{-7}$, and no other multiplier exceeds 0.4 in modulus; with the curves of 18 October (their extensions toward the legs' tips and the lower-left leg's own pair) these bounds become $1.9 \times 10^{-7}$ and 0.87, the largest second multiplier (0.86) lying where the lower-right leg's curves reach the bound of the continuation. No second multiplier reaches the unit circle along them; this does not exclude cusps, which need only a nonlinear degeneracy.

**The shrimp itself.** From the fixed start, a $512 \times 512$ map of the window (Figure 39a; run HP5) shows the window's family in 59 % of the cells of the followed domain; in 24 % the fixed start reaches another periodic attractor, mostly the coexisting period-4 attractor and its doublings (periods 4, 8, 16 and 32), in 12 % a largest exponent above $10^{-3}$ (chaos; at 33 cells it overrides a detected period), and in 5 % neither. To see the window whole, we followed its attractor from the body outward over a grid of spacing $1.25 \times 10^{-4}$ in both strengths (Figure 39; `tools/follow_attractor.py`). Each cell starts from the final state of a neighboring cell that is still on the attractor and runs 250 steps, followed by 300 recorded steps with a twin. It stays on the attractor only if its orbit has a period that is a multiple of five and the body's five-token text in at least four of its five places, or no detectable period, an exactly repeating text and an exponent below 0.005 (a slowly

converging orbit next to a fold or a flip); cells with chaos behind the same text are recorded but not continued. (A first rule, which compared each cell only with its neighbor, leaked across the fold into the surrounding chaos, where intermittent motion keeps the same text most of the time.) The followed attractor fills a shrimp: a body against the fold curve and three long legs, each between a fold curve and a flip curve, reaching $(\alpha_1, \alpha_2) = (-0.1148, 0.109)$, $(-0.1252, 0.0918)$ and, on the left, $\alpha_2 = 0.108$, with shells of periods 10, 20 and 40 beyond the flips and chaos behind the same five-token text outside them; a fourth leg, along the lower right, narrows from $5.1 \times 10^{-5}$ in $\alpha_1$ near the body to $3.5 \times 10^{-8}$, far below the grid step, so the follow does not enter it. Along its center line, each point started from the orbit continued along the leg's fold curve (`tools/leg_centerline.py`), the attractor of the body's family, with the body's text, is present at all 128 points from the body down to $\alpha_2 = 0.075$, the bound of the continuation (period 5 at 127, period 20 at one); one leg width beyond the fold none of them keeps it, and one leg width beyond the flip 118 of 128 carry the doubled orbit or chaos behind the same text (Figure 39b). Of 2173 cells computed, 1720 are on the attractor: 822 with period 5, 371 with period 10, 82 with period 20 and 11 with period 40, a few with periods 15, 30 and 50 inside chaotic bands, 240 chaotic behind the same text and 178 converging slowly. At $\log_{10} T = -0.105$ the followed domain has the same anatomy (1760 cells on the attractor; Figure 61): its period-5 body moves by $(+0.00085, +0.00236)$ in $(\alpha_1, \alpha_2)$, and the head, continued in temperature, by about $(+0.00105, +0.00247)$ over the same step, so the window drifts as a whole. The computed curves lie where the followed domain ends. The continuations from the body do not reach the lower-left leg's own boundary, even when rerun with wider parameter bounds, so we marched the period-5 orbit into the leg by Newton's method, through the 68 cells by which the follow run entered it, and continued it there (Appendix F, Figure 62). The leg is a strip between a flip curve on its left and a fold curve on its right. Every period-5 cell of the leg lies inside that strip (39 of 39), and no computed cell inside it is lost or has another period. With these curves, 276 of the 292 pairs of neighboring cells with periods 5 and 10 straddle a flip curve to within one grid step, and 290 to within two. Of the 754 pairs in which a period-5 cell borders a cell where the attractor was lost, 717 lie within one step of a fold curve and all 754 within two steps of a fold or flip curve, the farthest 1.7 steps away; with the body's curves alone these counts were 251, 504 and 544. Below $\alpha_2 = 0.0934$ the strip is narrower than one grid step (0.015 steps at $\alpha_2 = 0.080$, where the continuation reached its bound), so the leg goes on below the followed domain, too narrow to be followed cell by cell.

**Shrimps of a two-dimensional kind.** The period-5 window has this anatomy; only its head differs. At every cell of the $31 \times 31$ continuation grid and every point of the curves continued on 15 October, the multipliers beyond the leading pair are below 0.0032 (on the curves of 18 October at this temperature that recorded them, they stay below it inside the followed domain and reach 0.010 beyond it), so on the grid the orbit's linearization has at most two non-negligible directions. On the grid the leading multiplier never vanishes (its modulus stays at least 0.0139): where a one-dimensional map would be superstable, the two leading multipliers form a complex pair, the node having become a focus, or pass each other as real numbers of opposite sign. Between grid cells, however, a two-parameter Newton search for the point where the sum of the leading multipliers and the sum of their pairwise products vanish converges at $(\alpha_1, \alpha_2) = (-0.1184836, 0.1017217)$ (`docs/review/p5-nilpotent.jsonl`). There the three leading multipliers have nearly equal moduli, 3.4 to $3.6 \times 10^{-3}$, as the two conditions would make exactly equal for three roots alone (they would make the roots the cube roots of their product). The leading modulus sets the asymptotic linear contraction, a factor of about 280 per period, but a single return can still amplify a perturbation: at one phase the norm of the return map is about 65 (below). This point of small leading multipliers,

which we call near-nilpotent (the leading eigenvalues of the monodromy matrix nearly vanish, although the matrix itself does not), plays the role of the head. The nearly equal moduli do not by themselves decide whether the return map is locally of higher rank there or nearly of rank one and strongly nonnormal; its singular values decide it (`tools/monodromy_svd.py`, checked on synthetic operators with equal eigenvalues and different rank). At the point the second singular value of the return map is $1.8 \times 10^{-4}$ of the first at one starting phase (1.7 to $1.8 \times 10^{-4}$ at four points $5 \times 10^{-5}$ away) and at most 0.031 at the others, while the first, at that phase, is about 65, four orders of magnitude above the eigenvalues; in the body, away from the head, the ratio is 0.017 to 0.23. Near its head the return map is nearly of rank one and strongly nonnormal. Its leading rank-one part is nearly nilpotent because its left and right singular vectors are nearly orthogonal, which shows how a large norm can coexist with small eigenvalues. That part's eigenvalue, however, is about 13 times smaller than the full leading modulus: the remainder, whose norm is the second singular value (about 0.011 at that phase), exceeds the leading modulus and matters for the full spectrum. In the reduction to this rank-one part, $\lambda = \sigma_1 (v_1 \cdot u_1)$, the nonzero eigenvalue of $\sigma_1 u_1 v_1^\top$, which stays defined where the eigenvalues collide (at the head $\lambda = -2.7 \times 10^{-4}$, so the two directions are orthogonal to about $4 \times 10^{-6}$), the head lies on a single zero curve: on an $11 \times 11$ grid of spacing $10^{-5}$ around it, $\lambda$ changes sign exactly once in every row, along one nearly straight line through the head (Figure 60). Even in this reduction the head is not a crossing of two superstable curves. Continued in temperature, over the eleven values of $\log_{10} T$ from $-0.104$ to $-0.094$ at which the continuation passed its gates, the point moves along a nearly straight line; the leading modulus stays between 2.4 and $5.6 \times 10^{-3}$, and a fourth multiplier approaches it twice (Figure 59; `tools/nilpotent_track.py`). The product $D = \mu_1 \mu_2$ of the two leading multipliers also changes sign in the window ($D < 0$ at 41 of its 447 attracting cells), so the linearization restricted to the leading pair reverses orientation in part of the window. This differs from the setting of Hénon's map, whose two-dimensional Jacobian determinant has a fixed sign, but it does not by itself establish noninvertibility or a two-dimensional reduction of the full map: the pair is selected by modulus and can change identity, and where $D$ changes sign the second multiplier is as small as those beyond the pair. The trace-zero curve around an island of negative trace (Figure 38c) is closed on the grid except at one cell next to the fold curve, where it must close, because on a fold the trace is 1 plus the second multiplier and therefore positive: a closed trace-zero contour as in Type A, a classification derived for determinants of fixed sign [57]. In the hostile period-7 body the curves on which the leading real multiplier changes sign, candidate superstable curves of the continued orbit, form two arcs that approach each other and turn away without crossing, a Type-B-like geometry, where the leading multiplier becomes as small as the next (Figure 27; Section 10). The same plane holds a period-doubling cascade whose cells are nested V-shaped tongues near $\alpha_1 = -0.105$, $\alpha_2 = 0.105$. Continued in float64 on grids over these cells, its period-2, -4 and -8 orbits read the same way: no cell reaches superstability (the smallest leading moduli are 0.222, 0.041 and 0.034), and complex leading pairs and trace-zero curves take the place of the superstable curves. The cells become more one-dimensional with each doubling: over their attracting cells, the median ratio of the second to the leading multiplier is 0.59, 0.125 and 0.027. Per step, the second multiplier contracts by a nearly constant factor (medians 0.50 to 0.57), so its share shrinks like a power of the period; the per-step medians predict 0.52, 0.146 and 0.029, within 17 % of the measured ratios. In the terms of the Hénon map, whose Jacobian determinant $-b$ is constant, so that $\mu_1 \mu_2 = (-b)^p$, the per-step area contraction $|\mu_1 \mu_2|^{1/p}$ plays the role of $|b|$; its medians are 0.41, 0.41 and 0.50. In the period-4 and period-8 cells the trace-zero curves run along both arms of the V. Finer grids at its bottom resolve them: in both cells the two arms are one U-shaped trace-zero curve, and they do not cross. In the period-8 cell the product of the two leading multipliers is positive throughout and the third multiplier is at most $6 \times 10^{-5}$ of the second, so the reading is two-dimensional to that accuracy. In

the period-4 cell that product changes sign, and near the bottom of the U the second and third multipliers form a complex pair, so the leading pair is not isolated there. Neither cell has a crossing of trace-zero curves, the analog of a one-dimensional shrimp's head, and the period-4 cell has no near-nilpotent point at the bottom of its U either: a two-parameter Newton search on the invariants of the leading spectrum, as for the period-5 window, converges where its three leading multipliers have nearly equal modulus, 0.0325, and lie 120° apart, ten times the period-5 point's $3.5 \times 10^{-3}$ (`tools/nilpotent_search.py`). Under the decision rule fixed before these grids, both cells remain unresolved between the loop and turn-away types (the first period-8 grid left the bottom of the V unsolved because of a defect in the continuation, fixed for the second; `docs/dss`).

The junction where the upper leg leaves the body, two cusps that share a segment of the fold curve and a crossing of its other two branches, is the configuration that Mira et al. call a dovetail for critical curves with two such adjacent cusps [63]; we borrow the name, with periodic orbits in place of preimages. With the crossing, the configuration is consistent with a plane section of a swallowtail, whose geometry predicts four orbits in the pocket between the cusps and the crossing, none beyond the crossing and two elsewhere (Figure 40b). An orbit census at 13 points fixed before the computation found exactly these numbers at nine (Figure 38d): four orbits at three of five pocket points, none at either point beyond the crossing, and two at four of five surrounding points. At three other points it found fewer orbits, but all the attracting ones the model predicts (the counts are lower bounds); at one point, beyond a flip curve, it also found an orbit with another token loop. At all five pocket points of the census two attracting period-5 orbits coexist; near the upper cusp a flip curve crosses the pocket, beyond which one of them has doubled. The pocket therefore plays the kite's part, a bistable region at the end of a leg, with two cusps and a crossing where Gallas's kite has one cusp. In the quartic models of Figure 40, both configurations are plane sections of the swallowtail of the quartic fixed-point equation, and the window's configuration is consistent with such a section. Lifted from the parameter plane into the orbit states, the fold curve is smooth: its cusps are only where its shadow folds, and the two arms that cross in the shadow lie on different sheets, as in the model (Figure 41). The window's second fold curve has a second dovetail. In each, the two cusps have cubic coefficients of opposite sign, as in any section of a swallowtail: one of the saddle-area kind ($c > 0$, the upper cusp in both) and one of the crossroad or spring kind ($c < 0$). We do not claim the swallowtail point itself, which needs a third parameter, and we have not traced the tail [56], determined symbolic sequences or tested for a periodicity hub [54, 55]. With these qualifications, the period-5 window meets the three numerical criteria we required before calling a window a shrimp: primitive periodic orbits of the full state (float64 Newton solves), their stability (the multipliers and the followed attractor), and the organization of their boundary (continued fold and flip curves with located cusps, matched by the edge of the followed domain). It is a numerically verified shrimp in a two-parameter plane of the full map, of the kind Gallas found in Hénon's map [4, 64]. Its head resembles those of two-dimensional maps, a closed trace-zero curve rather than crossing superstable curves, but that likeness is geometric: no two-dimensional reduction of the dynamics is established (a closure test failed for numerical reasons; Appendix F), the product of the two leading multipliers changes sign, and none of this is proved by interval arithmetic.

**A second shrimp, in the plane of the crossing window.** The plane of Figure 11, the philosophy direction at layer 12 against the temperature, holds a second shrimp-shaped window: the period-6 loop "\n\nThe question\n\nThe existence" (Figure 31; runs P6S, HR9, HR10, DSS6 and KITE). At a strongly contracting cell of the map, $(\alpha, \log_{10} T) = (0.073097, -0.15204)$, Newton's method in float64 converges to a primitive period-6 orbit (residual $1.6 \times 10^{-14}$) whose leading multipliers form a complex pair of modulus 0.016. Followed from there through neighboring cells

on the grid of Figure 11, the attractor fills 4224 cells: a body and three long legs, with period 6 in 1946 cells, periods 12, 24 and 48 in 945 along the edges, other periods in 35, chaos behind the repeating text in 811 (an exactly repeating text, no period up to 64 and an exponent of at least 0.005) and slow cells in 487 (the same with an exponent below 0.005; with the maps' threshold of $10^{-3}$ the split would be 842 and 456). Four float64 branches out of the body end at a fold above and on the right and at flips on the left and below. Continued in the plane with every point checked (residual at most $10^{-10}$, critical multiplier real and within $10^{-7}$ of $\pm1$ on the body and kite curves; four points of the extended leg curves reach $2.9 \times 10^{-7}$), the curves outline the anatomy of Gallas's cell (Figure 40a): the fold curve bounds the body above and on the right, one flip curve bounds it on the upper left and a second along its bottom, and the doubled shells lie beyond both. Within the window of Figure 31a, the edge of the followed domain lies within two grid steps of the curves for all 232 neighboring pairs of periods 6 and 12 and all 459 pairs of a period-6 cell and a cell where the followed attractor was lost (median distances 0.19 steps); over the whole followed domain the shares fall to 388 of 916 and 1,720 of 1,888 (medians 4.3 and 0.24 steps), because the far parts of the legs leave the traced curves, so their boundary is not resolved. A $640 \times 640$ fixed-start map centered on the body (steps $4.4 \times 10^{-6}$ in $\alpha$ and $1.25 \times 10^{-5}$ in $\log_{10} T$, about seven times finer than Figure 11; 66.5 % of its cells chaotic) shows the body with its dark lines of strongest contraction, the flip region along its bottom and the two lower legs leaving its lower-left end, one straight down along the left flip curve and one to the lower left (Figure 31a).

The two flip curves cross at that end, near $(0.072912, -0.154104)$. They are flip curves of two different orbits: Newton's method at that point (`tools/kite_newton_at_R.py`), started from the orbit stored on each curve, converges to two distinct period-6 orbits (residuals $3 \times 10^{-14}$ and $2 \times 10^{-13}$), with the same six-token text but 6.4 % of the mean state norm apart (the largest point distance after the best of the six cyclic alignments). Their leading multipliers are $-0.9952$ and $-1.0005$ at this approximate crossing of the two traced curves, whose nearest saved points lie 1.7 and 0.3 steps of the grid of Figure 11 away. The crossing is a pseudo-crossing of curves on two sheets of the orbit family, the configuration at the corner R of Gallas's kite, where the flip curves of two coexisting fixed points cross [56, Fig. 7]. Inside the body near it, at $(0.0730, -0.1539)$, the orbit of the lower flip curve is attracting (leading multiplier $-0.797$); Newton's method from the other orbit did not converge there: the point lies just beyond that orbit's fold, on the branch C–A of the kite (Figure 32), where the orbit no longer exists. The rest of the kite follows from continuation (Figure 32; run KITE). Continued in $\alpha$ at fixed $\log_{10} T = -0.15395$ from the first orbit's flip, the branch is S-shaped: the orbit stays attracting up to a fold at $\alpha = 0.072992$, the branch returns along the saddle to a second fold at 0.072793, and it continues on the second orbit, which flips near 0.07301; at that temperature the two attracting orbits coexist for $\alpha$ between 0.072907 and 0.072992. The second orbit, continued upward in $\log_{10} T$ from its flip at fixed $\alpha$, is attracting up to its own fold at $-0.153657$. The fold curves traced from the two folds turn back at the same point, the kite's cusp C, located at $(0.0730186, -0.1532803)$ (cubic coefficient $c = -1.33 \times 10^4$, unfolding determinant $\det K = -2624$, critical multiplier within $7.7 \times 10^{-9}$ of $+1$, next modulus 0.00095), on the side of R toward the body. Its two branches meet the two flip curves at A = $(0.072991, -0.153984)$ and B = $(0.072900, -0.153707)$, completing the kite C–A–R–B of Gallas's cell. Besides C, the fold curves have five more located cusps (Table 17): near the ends of the upper-left and lower-left legs, two pairs that share a segment, each with cubic coefficients of opposite sign, the configuration of the period-5 window's upper leg; and one at the tip of a small separate window beyond a narrow neck below the body, where the orbit is stable again after a doubling; two branches, run independently, trace that fold curve and its turn to within one curve step.

On a $31 \times 31$ grid of the continued orbit over the body ($\alpha$ from 0.0724 to 0.0738, $\log_{10} T$ from $-0.1545$ to $-0.1500$; 529 of 961 cells solved), the leading multiplier is nonzero at every solved cell.

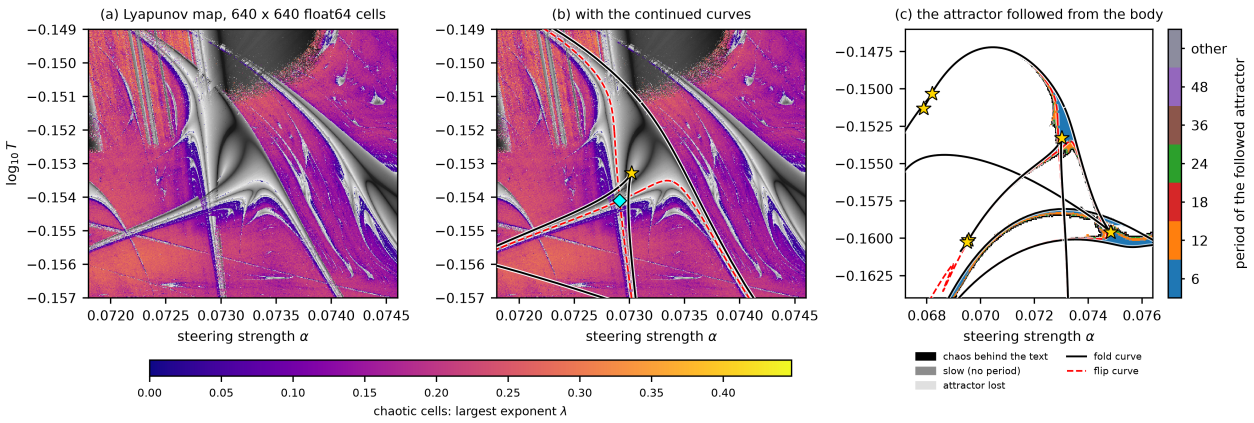


**Figure 31:** The period-6 shrimp, in the plane of Figure 11 (Qwen2.5-0.5B-Instruct, philosophy direction at layer 12; float64). (a) A $640 \times 640$ map of the window, centered on the body, colored as Figure 11. (b) The same map with the continued curves of the period-6 orbit: fold curves black, flip curves red and dashed; cyan diamond: the crossing of the two flip curves, where two distinct period-6 orbits are found (a pseudo-crossing); gold star: the kite's cusp C. (c) The attractor followed from the body, on the grid of Figure 11 and over a wider window, colored by its period (black: chaos behind the repeating text; gray: slow cells), with the same curves; gold stars: the six located cusps (Table 17): the kite's cusp C, pairs near the ends of the upper-left and lower-left legs (the lower pair's stars overlap at this scale) and the tip of the small window beyond the neck. The fold curve through C is that of the kite (Figure 32).

Its smallest modulus on the grid, 0.0063 at the cell $(0.073053, -0.15120)$ on the line of strongest contraction, belongs to a nearly imaginary leading pair, $0.0004 \pm 0.0063i$, with a third multiplier of modulus 0.0051: three multipliers of nearly equal small modulus, the near-nilpotent signature of the period-5 head. The dark line of strongest contraction runs from the flip crossing up the body and bends to the upper left, and all nine cells with a complex leading pair lie on its upper part (arguments 43 to 135 degrees, moduli 0.006 to 0.038). At 289 solved cells the two largest-modulus multipliers form a real or complex-conjugate pair, and their real product is negative at 143; at the other 240 the leading real multiplier is followed by a complex-conjugate pair, so the first two alone define no real two-dimensional determinant, and we infer no determinant-zero curve from them. The real leading multiplier changes sign across 45 neighboring solved pairs; only two have leading and next moduli within a factor three at both ends, and this endpoint test does not tell a multiplier crossing zero from an exchange of dominance. For a smoothly tracked two-dimensional invariant subspace the eigenvalues solve $\lambda^2 - \tau\lambda + \delta = 0$, so $\delta = 0$ marks a zero eigenvalue of that block, not of the leading multiplier; if $\delta$ has a nondegenerate saddle with a nonzero saddle value, its zero set near the saddle has two hyperbolic branches that approach and turn away, and the eigenvalues are complex where $\tau^2 < 4\delta$. This conditional geometric model is consistent with the complex pairs on the upper part of the line, but it is not an established explanation (consult 18, `docs/consults/2026-10-19-avoided-crossing`): at the minimum the third multiplier is comparable, and neither a saddle of $\delta$ nor a coupling of the two directions has been measured. Near the kite, where two orbits exist, curves that belong to different orbits can cross in the parameter plane without any degeneracy, as the superstable curves of Gallas's two coexisting fixed points do at his tail. With these qualifications the period-6 window meets the three numerical criteria along its body, with six located cusps and the kite of Gallas's cell: a second shrimp-shaped window of the full map, in the plane of Figure 11 itself. The far parts of its legs remain unresolved.

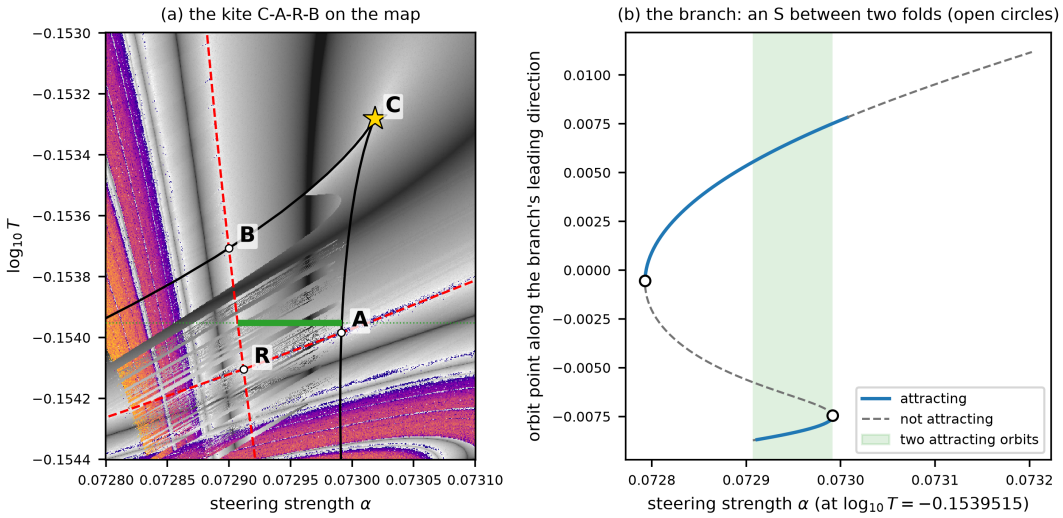


**Figure 32:** The kite of the period-6 shrimp (Qwen2.5-0.5B-Instruct, philosophy direction at layer 12; float64). (a) A $512 \times 512$ float64 map of the lower-left end of the body, with cells 7.5 times finer in $\alpha$ and 4.6 times finer in $\log_{10} T$ than in Figure 31a (gray: periodic, darker where more contracting; colors: chaotic), with the body's two flip curves (red, dashed), the fold curve continued from the branch of (b) (black), and the corners of Gallas's kite: R, where the flip curves cross (two distinct orbits, one on each curve); A and B, where the fold curve meets them; C, the located cusp where the fold curve turns back (gold star). Green: the line $\log_{10} T = -0.15395$ of the branch, thick where the two attracting orbits coexist. (b) The branch: the orbit's position along the leading direction of the branch's states against $\alpha$, solid where the orbit is attracting and dashed where not; two folds (open circles) make it an S, and the two attracting sheets overlap in the shaded interval (`tools/plot_p6_kite.py`). Inside the kite, the straight edge where the gray changes abruptly (near $\log_{10} T = -0.15353$) is a basin boundary of the fixed start, not a bifurcation, where we checked it: at two neighboring cells across it both attracting period-6 orbits exist (leading multipliers 0.18 and 0.60 to 0.61), the fixed start reaches one above the edge and the other below (`tools/kite_basin_check.py`), and at one steering strength the start on the edge lies on the stable manifold of a saddle orbit between them (Figure 34).

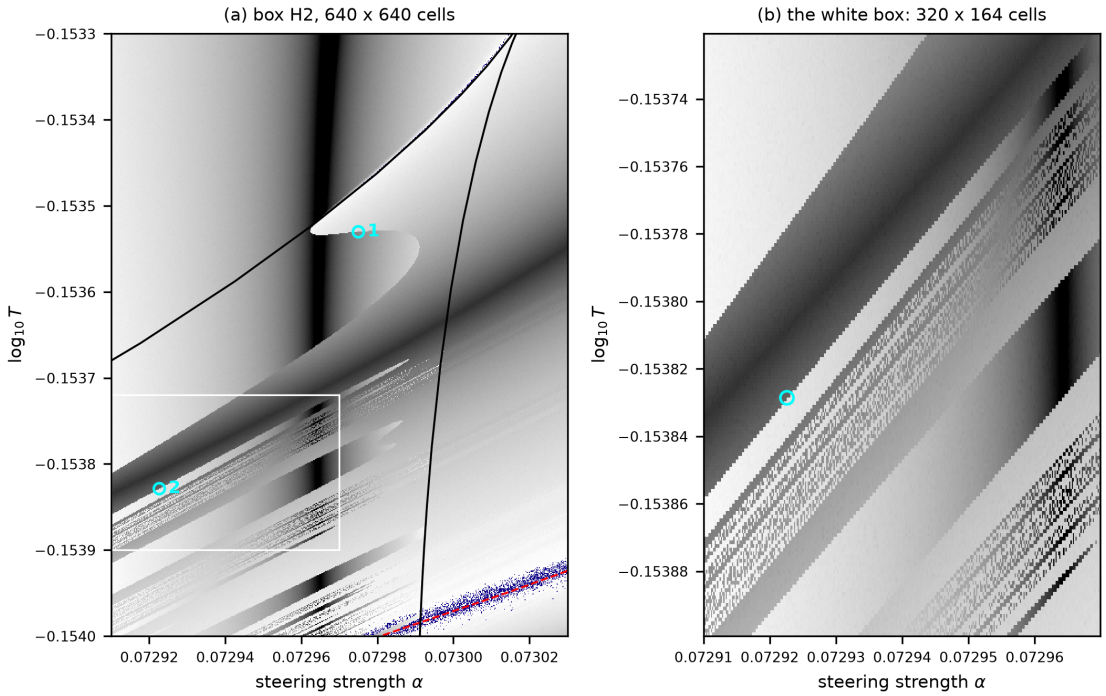


**Figure 33:** The hook and the striations at the upper end of the kite (Qwen2.5-0.5B-Instruct, philosophy direction at layer 12; float64). (a) A $640 \times 640$ map of $\alpha \in [0.07291, 0.07303]$ and $\log_{10} T \in [-0.1540, -0.1533]$ (gray: periodic, darker where more contracting; colors: chaotic), with the kite's fold curve (black) and a flip curve of the body (red, dashed); cyan: the two pairs of adjacent cells checked by Newton continuation, on the wedge's lower edge (1) and on a tongue's edge (2). (b) The white box in (a) at the map's own cells: tongues in which the outcome alternates from cell to cell.

**The hook.** A $640 \times 640$ map of the upper end of the kite (Figure 33; cells 3.1 and 2.5 times finer than in Figure 32a) resolves the hook-shaped light wedge and the striations below it. The wedge is bounded above by the kite's fold curve, where its orbit disappears, and below by a smooth curve where the fixed start switches to the other attracting orbit; at adjacent cells across that curve both orbits exist and attract (multipliers 0.18 and 0.60 to 0.61; pair 1). The striations are tongues bounded the same way: across the edge of one, two other attracting period-6 orbits exist at both cells (multipliers $-0.72$ and $-0.11$; pair 2), and inside several tongues the exponents of neighboring cells fall into two separated groups, so the fixed start's outcome alternates from cell to cell, a structure not resolved at this grid spacing (`tools/plot_p6_hook.py`, `tools/kite_basin_check.py`). From a random token's embedding as the start, the same box at $128 \times 128$ cells shows neither the hook nor the tongues, and only 38 % of its cells keep their exponent within 0.02 of the nearest cell of the fixed-start map (run HR12-RS): these edges are set by where the fixed start lies relative to the basins, as basin boundaries should be, not by bifurcations.

**Why the lower edge lies where it does.** An edge of the fixed start's outcome that is not a bifurcation is where the start crosses the boundary between two basins, and the boundary between the basins of two attracting orbits is typically the stable manifold of a saddle orbit between them. At $\alpha = 0.072975$ we bisected the wedge's lower edge in $\log_{10} T$ to the float64 limit, at $\log_{10} T = -0.1535299666043828$ (`tools/hook_saddle_check.py`). Started there, the loop comes close to a third period-6 orbit and stays near it: Newton's method from the most nearly periodic

state of that stretch converges (residual $2 \times 10^{-14}$) to a saddle with a single multiplier outside the unit circle, $\mu_u = 1.2625$, real, with the next modulus $7.8 \times 10^{-4}$, at relative distances $3.5 \times 10^{-3}$ and $4.7 \times 10^{-3}$ from the two attracting orbits. A start a small distance $\delta$ off the saddle's stable manifold comes within a distance $\propto \delta^{\chi_s/(\chi_s+\chi_u)}$ of the saddle, as for a passage near a linear saddle with $\chi_u = \ln \mu_u$ and $\chi_s = -\ln |\mu_s|$ from its slowest stable multiplier $\mu_s$ (an exponent of 0.97 here), and then leaves along the unstable direction, its distance growing by $\mu_u$ per period, so the time it spends near the saddle grows by $6/\ln \mu_u = 25.74$ steps for every factor $e$ by which the offset shrinks. Both predictions hold over eight decades (Figure 34; `tools/hook_saddle_exit.py`). At 17 temperatures on each side of the edge, a distance $\delta$ from $10^{-6}$ to $10^{-14}$ in $\log_{10} T$ away, the last step within $10^{-3}$ of the saddle grows by 25.78 and 25.75 steps per factor $e$ in $\delta$ (all points within 4.0 and 2.9 steps of the fitted lines), the closest approach grows with $\delta$ with log-log slopes 0.986 and 0.995 (predicted 0.97), and every start below the edge ends on the strongly contracting orbit and every start above it on the other. Together with the random start, which removes the edge, this is strong numerical evidence that, at this steering strength, the lower edge is where the fixed start crosses the saddle's stable manifold. Bisecting 676 jumps of the outcome along the map's columns (to $2.6 \times 10^{-13}$ in $\log_{10} T$; `tools/hook_edge_track.py`) traces the hook's other edges (Figure 34a). The upper edge follows the kite's fold curve, 0.1 to 1.6 grid rows above a spline through the continued curve's points and more so toward the cusp. The offset comes from the map's window (Figure 35b,c; `tools/hook_tip_strip.py`): half a row and one row beyond the fold, where the weaker orbit does not exist, the exponent over the map's window (steps 300 to 600) lies between $-0.022$ and $+0.012$ for $\alpha$ above 0.072965 and 0.072967, because the loop still lingers at the orbit that vanished there, while over steps 3000 to 3400 every cell of the strip beyond the fold gives the strongly contracting orbit's exponent ($-0.18$ to $-0.71$).

**The tip of the hook.** The two edges meet where the fixed start lands exactly on the saddle-node orbit. At a point of the fold, the coordinate $u$ of the merged orbit along its critical direction changes over one six-step return as $u' = u + \eta + bu^2$ to leading order, with $\eta$ the distance from the fold in the normal form's units and $\eta = 0$ on the fold (Appendix E; [42]); after its fast transient the fixed start lands at $u_0 = \ell^\top (x - p_0)/\ell^\top r$, with $r$ and $\ell$ the right and left eigenvectors of the multiplier $+1$ at the orbit point $p_0$. Where $u_0$ has the sign that the quadratic term drives toward zero, the start converges onto the saddle-node orbit, and just inside the coexistence region it reaches the weaker orbit; where $u_0$ has the other sign, the start escapes to the strongly contracting orbit. To leading order the tip is therefore the point of the fold where $u_0$ changes sign (exactly, it is where the start lands on the strong-stable set of the saddle-node orbit, which the zero of $u_0$ approximates near that orbit). At seven points of the continued fold curve, $u_0$ is negative at $\alpha = 0.072980$ to 0.073002, where the start converges slowly onto the orbit (its drift fits $u' = u + bu^2$ with $b = 56$ to 68), and positive at $\alpha = 0.072889$ to 0.072963, where it escapes (`tools/hook_tip_check.py`). At eight fold points located between them by Newton's method at fixed $\alpha$ (residuals at most $5 \times 10^{-14}$; `tools/hook_tip_fold_points.py`), $u_0$ is nearly linear in $\alpha$ and crosses zero at $\alpha = 0.0729655$, the predicted tip to leading order (Figure 35a). Inside the fold, the boundary between the two outcomes approaches this point: at offsets of 2, 1, 0.5, 0.25 and 0.125 grid rows below the fold, the last cell that ends on the strongly contracting orbit lies at $\alpha = 0.0729627$, 0.0729632, 0.0729637, 0.0729642 and 0.0729645 (long window, cells $10^{-7}$ apart), and extrapolations with exponents from 1/3 to 1/2 put the boundary's end on the fold at $\alpha = 0.0729651$ to 0.0729657, bracketing the prediction (Figure 35d). The normal form predicts a tangential contact, the gap between the edges growing quadratically along the fold, which corresponds to the exponent 1/2; these points do not resolve the exponent. In the map's window the boundary appears up to $7 \times 10^{-7}$ farther from the tip, as

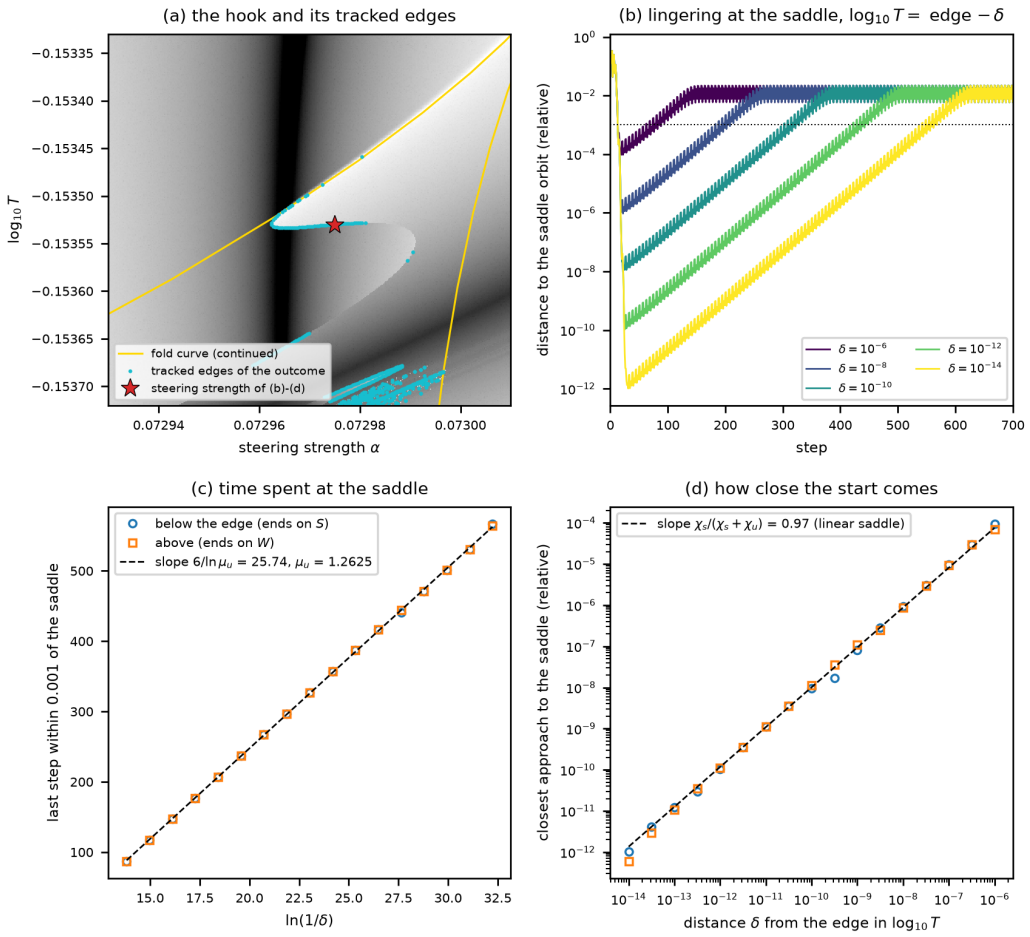


**Figure 34:** The hook's lower edge is where the fixed start crosses the stable manifold of a saddle orbit (Qwen2.5-0.5B-Instruct, philosophy direction at layer 12; float64). (a) The map of Figure 33a near the hook, with the kite's continued fold curve (gold) and the edges of the fixed start's outcome bisected along the map's columns (cyan; brackets whose end exponents differ by at least 0.1); red star: the steering strength $\alpha = 0.072975$ of (b)–(d). (b) Distance to the saddle orbit along the loop started a distance $\delta$ in $\log_{10} T$ below the edge: it arrives along the stable manifold within about 25 steps, lingers, and leaves along the unstable direction; dotted: the radius $10^{-3}$ of (c). (c) The last step within $10^{-3}$ of the saddle against $\ln(1/\delta)$, for starts below the edge (which end on the strongly contracting orbit $S$) and above it (which end on the other, $W$); dashed: slope $6/\ln \mu_u$ from the saddle's unstable multiplier $\mu_u$. (d) Closest approach to the saddle against $\delta$; dashed: slope $\chi_s/(\chi_s + \chi_u) = 0.97$ from the saddle's multipliers.

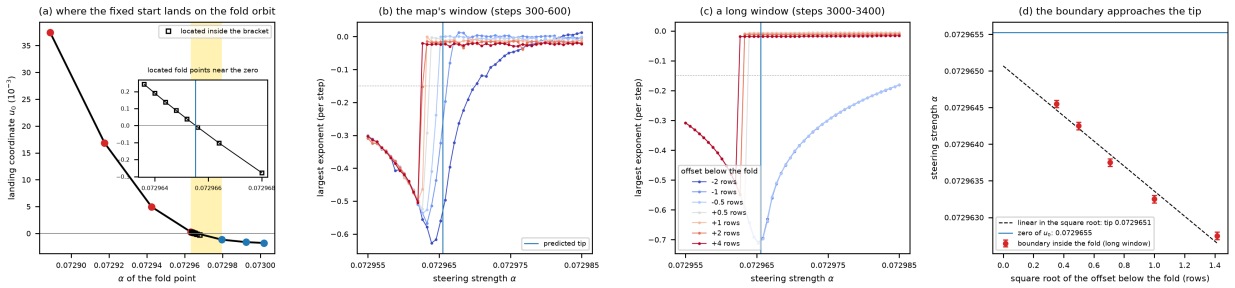


**Figure 35:** The tip of the hook (Qwen2.5-0.5B-Instruct, philosophy direction at layer 12; float64). (a) The fixed start's landing coordinate $u_0$ on the saddle-node orbit at points of the kite's fold curve: negative (blue) where the start converges onto that orbit, positive (red) where it escapes; squares and inset: fold points located by Newton's method at fixed $\alpha$, where $u_0$ crosses zero at $\alpha = 0.0729655$ (vertical line, the predicted tip, also in (b) and (c)). (b) The largest exponent over the map's window (steps 300 to 600) along rows at fixed offsets from the fold curve (negative: beyond the fold, where the weaker orbit does not exist); the strongly contracting orbit has exponents of $-0.18$ to $-0.71$ here, the weaker one exponents near $-0.01$; dotted: the threshold $-0.15$ between them. (c) The same cells over steps 3000 to 3400: beyond the fold every cell ends on the strongly contracting orbit. (d) The boundary between the two outcomes inside the fold (last cell on the strongly contracting side and first on the weaker, long window) against the square root of the offset, with a straight-line extrapolation to the fold (which assumes the exponent 1/2; the points do not resolve it).

expected where the saddle's unstable multiplier approaches 1 near the fold and the start lingers longer.

**Symbolic dynamics.** Jones's unimodal interpretation of selected Rössler return maps, which traced the shape of a periodicity hub to a conjugacy between the Rössler system and unimodal maps in part of its parameter plane [55], suggests an approximate scalar coding of the six-band attractor. Where the attractor writes the body's six-token text, the loop visits six thin bands of the state space in turn, one per token, and returns to each band every six steps. Many sampled six-step return maps, plotted along a band's first principal axis, show a single turning point: the next visit traces a parabola against the previous one (Figure 36). We code each visit by the branch it lies on, L on the increasing one and R on the decreasing one. The branch is read from the sign of the six-step derivative along the band, which the twin trajectory of the Lyapunov exponent provides (`tools/symbolic_dynamics.py`): the twin's offset direction is carried along the attractor, and its scalar product with its own direction six steps earlier has the sign of that derivative where the offset is aligned with the band and the band turns by less than a right angle. The checks below support this approximation; they do not prove it. Pooling the misplaced visits and the rarer symbol's visits over the phases where the band is straight enough for the sign to be defined, 48 of the 58 chaotic six-band cells of a $48 \times 48$ map of the window have an error ratio below 5 % (the largest passing ratio is 4.7 %, 23 cells have no misplaced visit, and a single phase of a passing cell reaches 21.7 %). The other 10 cells fail the coding test: three in one column beside the body's left flip curve and seven below the kite. In 7 of them the return map has more than one resolved turning point: it rises and falls more than once (Figure 36h–k). For a $C^3$ unimodal interval map with negative Schwarzian derivative, at most one attracting periodic orbit can have an immediate basin that avoids the interval's endpoints [39]; the extra turning points below the kite are consistent with a scalar explanation of the coexistence inside it, but they establish neither a global scalar reduction nor its Schwarzian sign.

A periodic orbit of period $6k$ visits each band $k$ times. Its signs, rotated to the largest sequence in the order of kneading theory, give it a label W|X in the sense of Metropolis, Stein and Stein (MSS) [65, 66]: W is matched to the quadratic family's superstable itinerary WC and names the window, and X records the orbit's inferred last branch symbol. Away from a superstable parameter this is an orbit label, not a measured itinerary of the critical point. After a majority vote over the band phases whose coding is usable (at least three) and an explicit filter that keeps only MSS words, 44,577 periodic six-band cells on the $640 \times 640$ grid of Figure 31a receive 23 distinct window words W (Figure 37); the filter rejects 240 further cells whose labels are not MSS words. The body and its period doublings carry the words of the doubling cascade: the empty word (period 6), R (12), RLR (24) and RLRRRLR (48). Windows in the surrounding chaos carry other words, among them RL (period 18), RLRR (30), and RLRRR and RLLRL, two distinct windows of period 36 that only their words tell apart. Within a window, the label predicts the sign of the orbit's leading multiplier, $(-1)^{n_R}$ with $n_R$ the number of R's in W|X: positive next to the boundary where the orbit is born (a fold, or for a doubled orbit the flip curve of its parent) and negative next to its own flip. The curve where the predicted sign changes is a candidate for the window's superstable curve. The scan assigns C to 153 cells whose usable phases do not agree sufficiently on the last symbol; at the two selected C cells, Newton calculations report small, nonzero complex leading pairs. These labels mark ambiguous scalar coding, not located superstable curves. Float64 Newton solves with exact Jacobians at one cell for each label W|X with at least three coded cells in the half of the scan then complete (the cell nearest the center of the label's largest patch: 23 cells, covering 12 of the 23 words; Table 16), scored by a subsequent clean-phase rule (phases whose L and R visits one threshold separates along the band, with every $|\cos| \geq 0.5$), reproduce the scan's label at 16 cells; the two C cells have complex leading pairs, and at the remaining 5 cells, just below the kite, no phase is clean, so their four words (RLL on both sides, RLLLRLL, RLLLRLR and RLLLRRR) remain unconfirmed; the other 11 words were not checked. At the 16 confirmed cells the full map's leading multiplier also has the sign that the label's parity predicts; this sign rule belongs to the scalar coding and carries over to the full map only while that multiplier stays real and dominant. These checks support selected labels, not the whole map. In total, 1,469 of the 46,046 eligible periodic six-band cells receive no word (3.2 %), the 240 rejected by the filter among them; 922 of them (63 %) lie within Euclidean distance two grid cells of the eligible domain's edge.

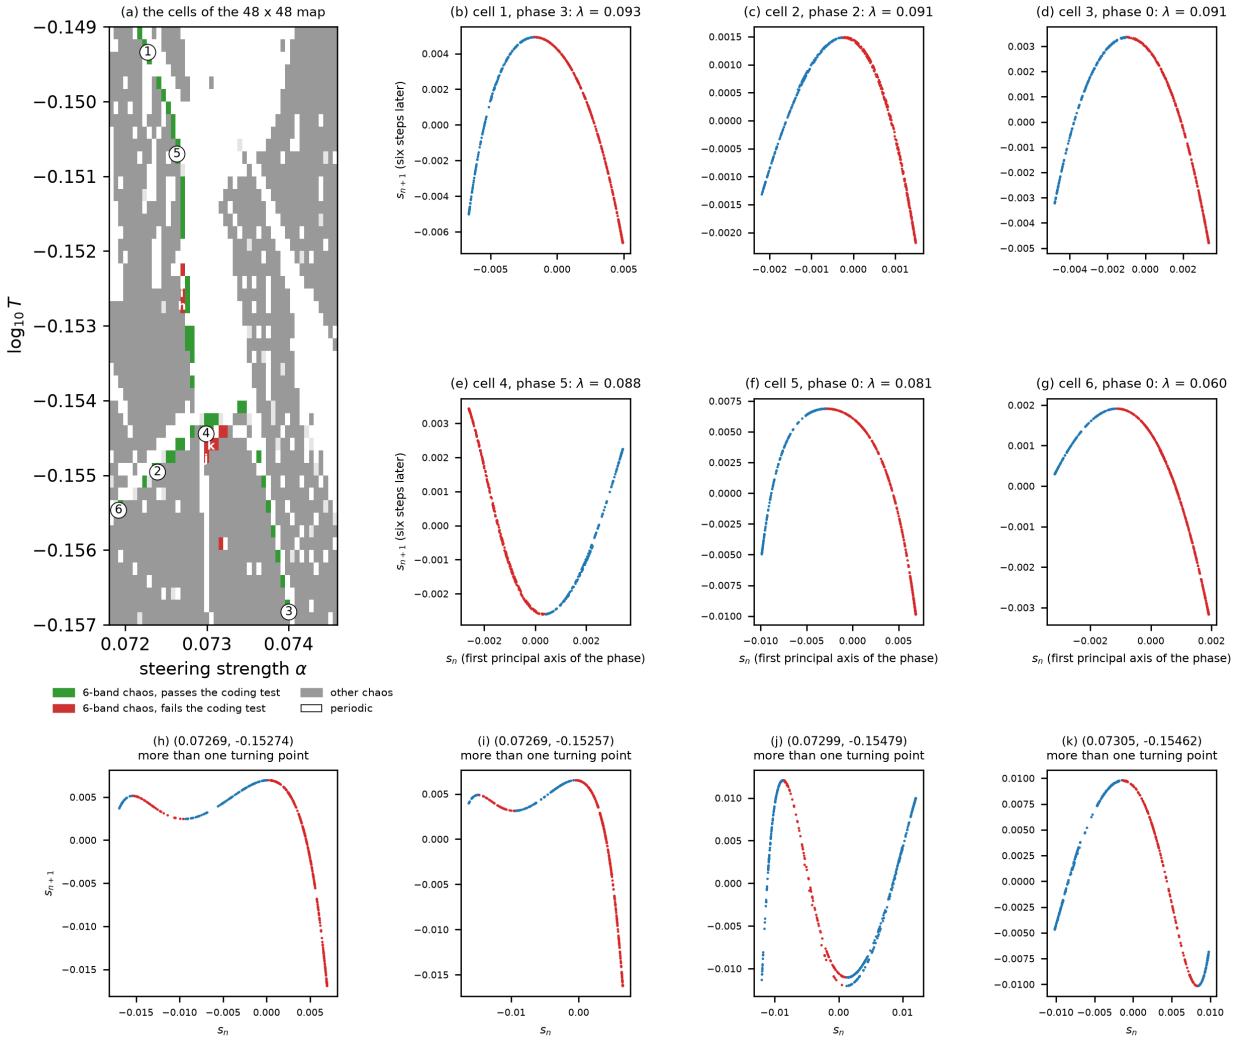


**Figure 36:** Return maps of the six-band chaos around the period-6 shrimp (Qwen2.5-0.5B-Instruct, philosophy direction at layer 12, float64; 1000 transient and 3000 recorded steps per cell). (a) The cells of a $48 \times 48$ map of the window of Figure 31a: chaotic cells writing the six-token text that pass the pooled coding test (green: misplaced visits below 5 % of the rarer symbol's, pooled over the usable phases) or fail it (red), other chaotic cells (gray) and periodic cells (white). (b–g) Six-step return maps at six green cells: the position along one band (its first principal axis) against the position at the previous visit; blue: visits where the six-step derivative is positive (L), red: negative (R). (h–k) Return maps at four red cells (letters in (a)) with more than one turning point.

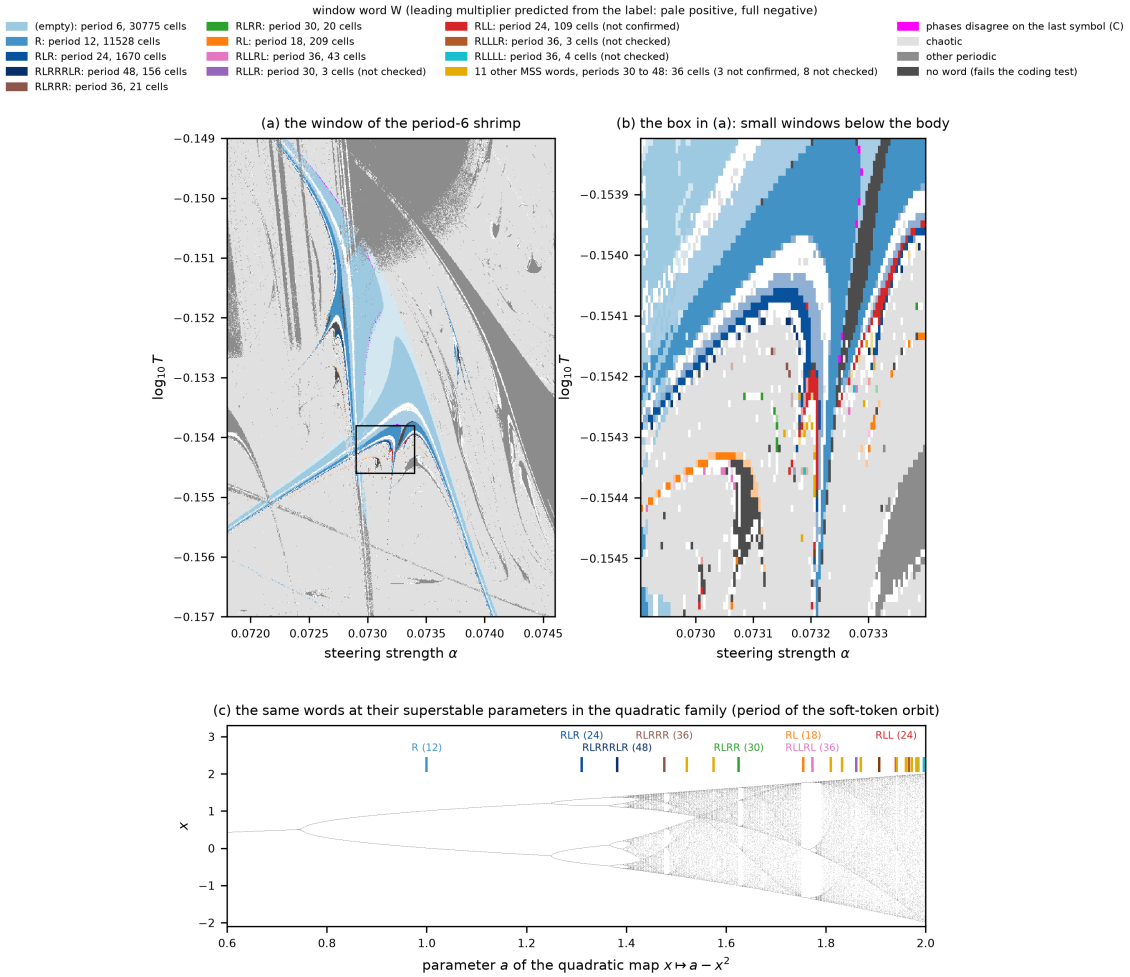


**Figure 37:** Symbolic words of the period-6 shrimp's windows ($640 \times 640$ float64 cells, the grid of Figure 31a). (a) Each periodic cell of the six-band region colored by the word of its window: pale where the label predicts a positive leading multiplier, full where it predicts a negative one, magenta where the phases disagree on the last symbol (C); light gray: chaos; mid gray: other periodic orbits; dark gray: no word (fails the coding test). Windows marked "not confirmed" in the legend are those of Table 16's cells without a clean phase, and those marked "not checked" had no float64 check. (b) The box in (a). (c) The same words at the superstable parameters of the quadratic family $x \mapsto a - x^2$, on its bifurcation diagram (the body's empty word is that of its fixed point, at $a = 0$); labels give the period of the soft-token orbit, six times the word's period.

**Table 16:** Float64 checks of the symbolic words (`tools/sd_verify_words.py`): Newton with exact Jacobians at the center of the largest patch of each window word and side of Figure 37 with at least three cells in the eight of the scan's 16 bands then complete (23 cells covering 12 of the 23 words; the other 11 were not checked). Word and side: the scan's label; $\mu_1$: the orbit's leading multiplier; clean: the phases whose L and R visits one threshold separates along the band, with every $|\cos| \geq 0.5$; result: the clean phases give the scan's word (confirmed), no phase is clean, or the leading pair is complex (side C: the scan's phases disagree on the last symbol).

| word | side | period | $(\alpha, \log_{10} T)$ | $\mu_1$ | clean | result |
|---|---|---|---|---|---|---|
| (empty) | C | 6 | $(0.0730707, -0.1520673)$ | $-0.002 + 0.024i$ | 0 | complex pair |
| (empty) | L | 6 | $(0.0731584, -0.1527559)$ | $+0.189$ | 6 | confirmed |
| (empty) | R | 6 | $(0.0732285, -0.1533944)$ | $-0.686$ | 6 | confirmed |
| R | C | 12 | $(0.0732548, -0.1537825)$ | $-0.001 + 0.004i$ | 0 | complex pair |
| R | L | 12 | $(0.0731628, -0.1539703)$ | $-0.770$ | 5 | confirmed |
| R | R | 12 | $(0.0733030, -0.1538200)$ | $+0.078$ | 5 | confirmed |
| RL | L | 18 | $(0.0730488, -0.1543333)$ | $-0.184$ | 3 | confirmed |
| RL | R | 18 | $(0.0727465, -0.1528936)$ | $+0.266$ | 2 | confirmed |
| RLL | L | 24 | $(0.0732110, -0.1542582)$ | $-0.481$ | 0 | *no clean phase* |
| RLL | R | 24 | $(0.0731847, -0.1542707)$ | $+0.278$ | 0 | *no clean phase* |
| RLR | L | 24 | $(0.0731540, -0.1540454)$ | $+0.178$ | 4 | confirmed |
| RLR | R | 24 | $(0.0727772, -0.1524053)$ | $-0.526$ | 3 | confirmed |
| RLRR | L | 30 | $(0.0731408, -0.1543208)$ | $-0.051$ | 3 | confirmed |
| RLRR | R | 30 | $(0.0731408, -0.1542707)$ | $+0.139$ | 4 | confirmed |
| RLLRL | L | 36 | $(0.0740260, -0.1569249)$ | $+0.168$ | 4 | confirmed |
| RLLRL | R | 36 | $(0.0730444, -0.1543584)$ | $-0.439$ | 3 | confirmed |
| RLRRR | L | 36 | $(0.0731671, -0.1542457)$ | $+0.146$ | 3 | confirmed |
| RLRRR | R | 36 | $(0.0731628, -0.1541956)$ | $-0.063$ | 3 | confirmed |
| RLLLRLL | L | 48 | $(0.0731803, -0.1543083)$ | $+0.169$ | 0 | *no clean phase* |
| RLLLRLR | L | 48 | $(0.0732066, -0.1543834)$ | $-0.251$ | 0 | *no clean phase* |
| RLLLRRR | L | 48 | $(0.0733074, -0.1541581)$ | $+0.035$ | 0 | *no clean phase* |
| RLRRRLR | L | 48 | $(0.0731146, -0.1541080)$ | $-0.085$ | 4 | confirmed |
| RLRRRLR | R | 48 | $(0.0731102, -0.1541080)$ | $+0.226$ | 5 | confirmed |

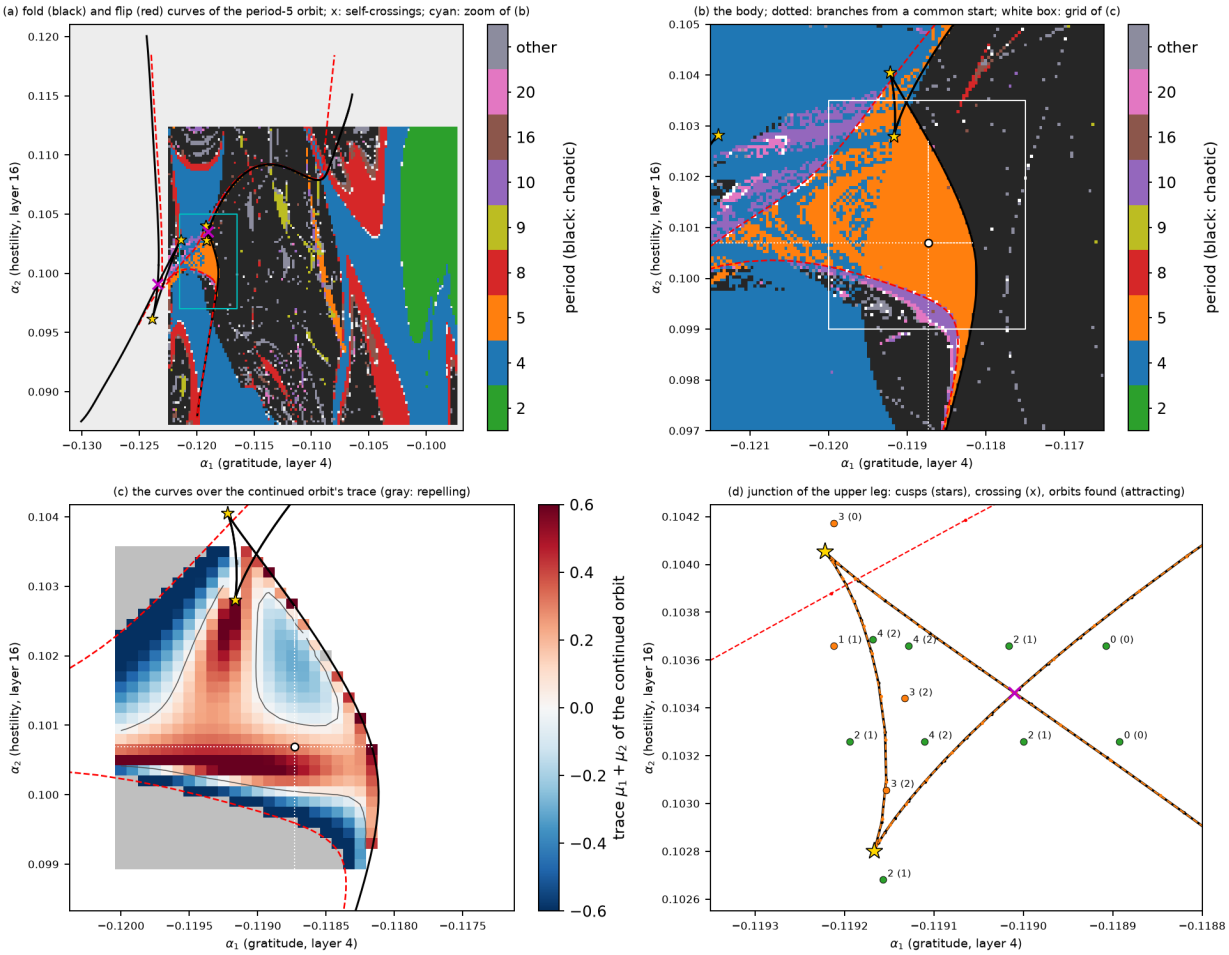


**Figure 38:** The skeleton of the period-5 window in the plane steered at two depths (Qwen2.5-0.5B-Instruct, gratitude at block 4 and hostility at block 16, $\log_{10} T = -0.1$, float64). (a) The two fold curves (black; multiplier $+1$) and the flip curves (red, dashed; multiplier $-1$) of the window's period-5 orbit, over the attractor reached from the fixed start of every cell (Appendix B) on a wider grid (gray: outside it); gold stars: the four located cusps; magenta crosses: the self-crossings of the two fold curves; cyan: the zoom of (b). (b) The body over a finer grid (as Figure 64a), with the four branches (dotted) that found the first boundary points from a common start (circle); white: the continuation grid of (c). (c) The same curves over the trace of the continued orbit's two leading multipliers (Figure 64b; gray: repelling). (d) The junction of the upper leg with the body: the fold curve has two cusps that share a segment and crosses itself (x), where its arms are folds of two different period-5 orbits; its two traces, continued from two different boundary points (black, and orange dashed), coincide. Circles: the 13 points of the orbit census, with the number of period-5 orbits found and, in brackets, the number attracting (green: the count predicted before the computation; orange: not).

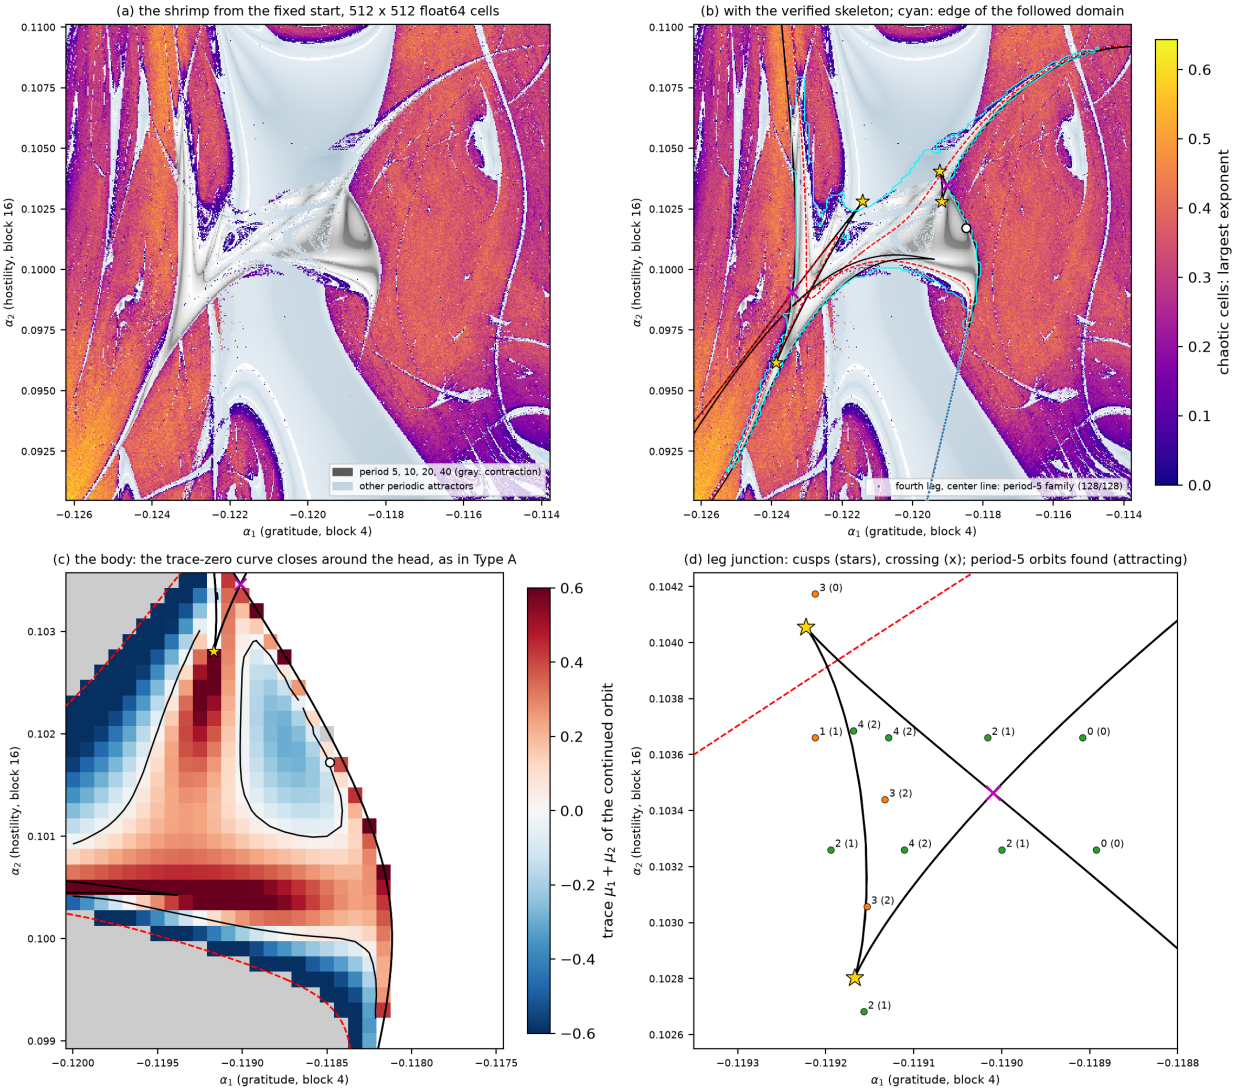


**Figure 39:** The period-5 shrimp (Qwen2.5-0.5B-Instruct, gratitude at block 4 and hostility at block 16, $\log_{10} T = -0.1$, float64). (a) A $512 \times 512$ map of the window from the fixed start (run HP5; steps $2.4 \times 10^{-5}$ in $\alpha_1$ and $3.8 \times 10^{-5}$ in $\alpha_2$): cells whose period is a multiple of five, the window's family, in gray by contraction; other periodic attractors (among them the coexisting period-4 attractor that the fixed start reaches in parts of the legs) pale; cells whose largest exponent exceeds $10^{-3}$ by its value (this overrides a detected period at 33 cells of the followed domain). (b) The same map with the window's verified skeleton: the fold curves (black; multiplier $+1$) and flip curves (red, dashed; $-1$) of the period-5 orbit, including the lower-left leg's own pair (Figure 62), the located cusps (gold stars), the self-crossings of the fold curves (magenta) and the near-nilpotent point (white circle). Cyan: the edge of the domain of the window's attractor followed cell by cell from the body on a grid of spacing $1.25 \times 10^{-4}$. Blue dots: the center line of the fourth (lower-right) leg, too thin for the grid; all 128 sampled points retain the followed family, 127 with period 5 and one with period 20. (c) The body over the trace of the continued orbit's two leading multipliers (gray: repelling): the trace-zero curve (black) closes around an island of negative trace, the geometry of a Type A head, and passes the near-nilpotent point. (d) The junction of the upper leg: two cusps that share a segment of the fold curve and the crossing of its other branches, with the number of period-5 orbits found (attracting) at 13 points fixed before the computation (green: the count predicted by a section of a swallowtail; orange: not).

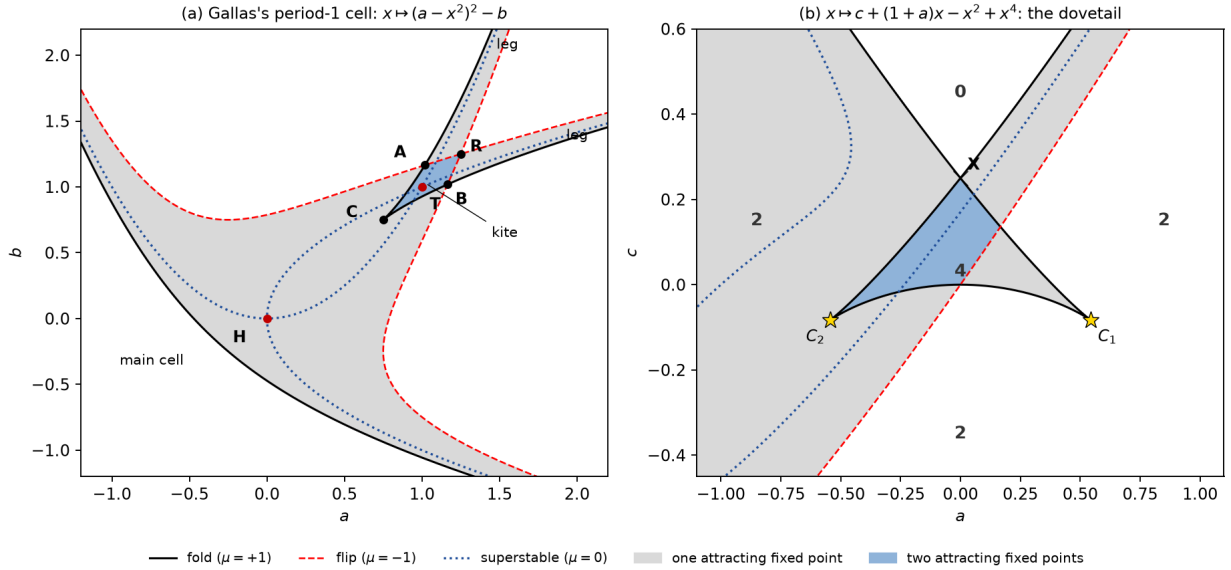


**Figure 40:** The anatomy of a shrimp's cell in two classical one-dimensional models, computed (gray: one attracting fixed point; blue: two). (a) Gallas's canonical period-1 cell, $x \mapsto (a - x^2)^2 - b$ (his eq. (5.3), rotated and labeled as in his Figure 7 [56]). Fold curves (black; multiplier $+1$) and flip curves (red, dashed; $-1$) bound the main cell, and the superstable curves (blue, dotted; 0) of the map's critical points cross at the head H. Two legs, each between a fold and a flip curve, cross in the kite C–A–R–B, which begins at the cusp C of the fold curve; in the kite two attracting fixed points coexist, and their superstable curves cross at the tail T. The flip curves of the two legs cross at R, which makes the kite a crossroad area in the sense of Carcassès et al. The computed corners A and B agree with Gallas's to six significant digits. (b) The quartic model of Carcassès et al. [61], $x \mapsto c + (1 + a)x + bx^2 + x^4$, in the plane of $a$ and $c$ at $b = -1$, a plane they did not draw: the fold curve has two cusps $C_1$ and $C_2$ that share a segment and crosses itself at X (a dovetail, in the term Mira et al. use for critical curves with two such cusps [63]). Numbers: real fixed points in each region; a flip curve crosses the pocket, and two fixed points attract only to its left. Both fixed-point equations are quartics $x^4 + ux^2 + vx + w = 0$, whose fold set is the swallowtail: (a) is a section at fixed $v$, with one cusp, (b) a section at fixed $u < 0$, with two cusps and a crossing. A two-dimensional map whose Jacobian determinant never vanishes, such as the Hénon map, has no superstable curves, since no multiplier of its periodic orbits can vanish; trace-zero curves take their place and either close around the head (Type A) or approach each other and turn away (Type B) [57]; the language model's period-5 window has the first geometry (Figure 39c).

**Table 17:** The six located cusps of the period-6 window (float64), in the plane of $\alpha$ and $\log_{10} T$ (C: the cusp of the kite of Figure 32; upper and lower 1, 2: pairs near the ends of the upper-left and lower-left legs; neck: at the tip of the small window beyond the neck): position, cubic coefficient $c$ and unfolding determinant. At each cusp the oriented coefficient $b \operatorname{sign} a$ falls from values between 2.4 and 39.2 at the bracketing curve points to at most $9.5 \times 10^{-5}$ in modulus, the critical multiplier equals $+1$ to within $8.2 \times 10^{-9}$, and the next has modulus at most 0.74 (located by `tools/cusp_locate.py`; records `p6s/locate-*` in the data store, with checksums in the research log).

| cusp | $(\alpha, \log_{10} T)$ | $c$ | $\det K$ |
|---|---|---|---|
| C | $(0.0730186, -0.1532803)$ | $-1.33 \times 10^{4}$ | $-2.62 \times 10^{3}$ |
| upper 1 | $(0.0678765, -0.1513104)$ | $+6.10 \times 10^{3}$ | $4.59 \times 10^{4}$ |
| upper 2 | $(0.0682059, -0.1503283)$ | $-8.01 \times 10^{3}$ | $2.20 \times 10^{5}$ |
| lower 1 | $(0.0694974, -0.1602656)$ | $-2.25 \times 10^{3}$ | $2.09 \times 10^{4}$ |
| lower 2 | $(0.0695513, -0.1601114)$ | $+2.01 \times 10^{3}$ | $2.20 \times 10^{4}$ |
| neck | $(0.0748392, -0.1595956)$ | $-4.02 \times 10^{4}$ | $4.47 \times 10^{3}$ |

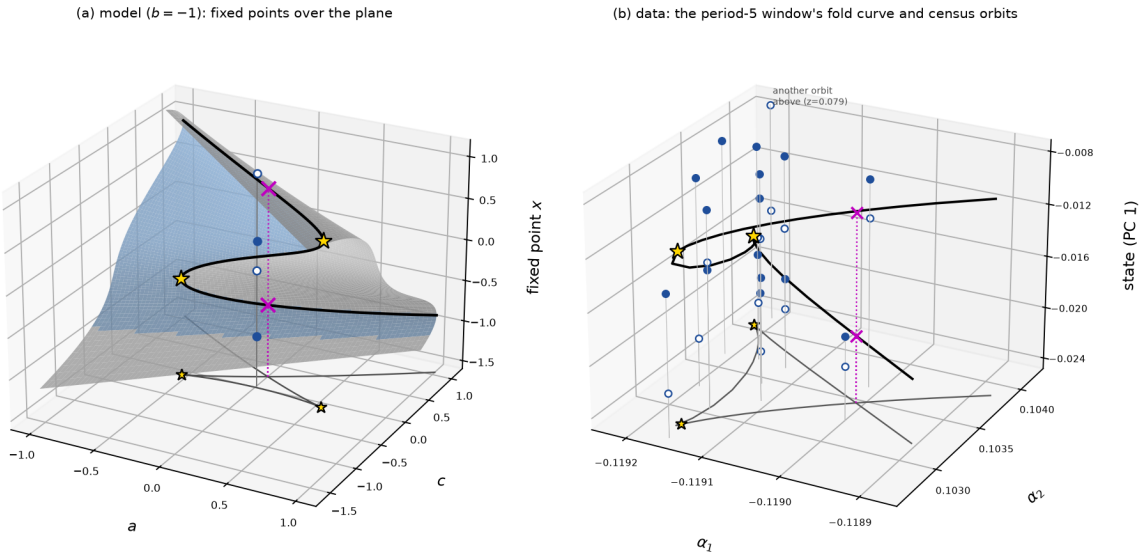


**Figure 41:** The dovetail in Mira's foliated representation: parameters and one state coordinate. (a) Model: the fixed points $x$ of the quartic map at $b = -1$ over the plane of $a$ and $c$ (blue: attracting; gray: not). The fold curve (black) is a smooth curve on this surface, and its shadow on the parameter plane is the dovetail of Figure 40b, with its two cusps (stars) and its crossing X, whose two lifts (crosses) lie on different sheets. Over a point of the pocket the surface has four sheets (circles; filled: attracting). (b) Data: the period-5 window of Figure 38 (Qwen2.5-0.5B-Instruct, gratitude at block 4 and hostility at block 16, $\log_{10} T = -0.1$, float64). The continued fold curve through the junction (black), lifted by the first principal coordinate of these states (86 % of their variance), with its shadow (gray), its two located cusps (stars), the two lifts of the crossing (crosses), and every period-5 orbit the census found (filled: attracting; open: repelling), each at the phase continuous with the fold curve. One orbit with another token loop lies above the frame.

## 12 From greedy loops to chaos: one picture

The preceding sections establish the pieces: a factorized derivative, folds, cascades and windows. This section assembles them into one account of why the loop of Qwen2.5-0.5B along the philosophy direction looks the way it does. It answers three questions: where the periodic orbits come from, why the windows cross one another, and why a network with 896-dimensional states shows the signatures of one-dimensional maps. Every step was checked against the full map in float64 (`docs/e2e/`).

**At zero temperature: greedy loops.** As $T \to 0$ the soft token becomes the embedding of the most probable token (at an exact tie, the average of the tied embeddings). Wherever each visited state has a unique most probable token, the loop thus becomes greedy decoding with a one-token memory (Section 3), and its eventual cycles are token cycles: the zero-temperature attractors, superstable because the limit map is locally constant away from ties. Along this direction the greedy map has a two-token loop " is there" for $\alpha$ between 0.06301 and 0.07773, and a three-token loop "\n\nThe question" for $\alpha$ between 0.06609 and 0.07006. At $\alpha = 0.070$ and low temperature, the loop indeed settles on these: in a column of 96 temperatures from $\log_{10} T = -2$ upward, 59 end on "\n\nThe question" and 16 on a period-4 loop that alternates " is it" and " is there".

**At finite temperature: compromises between competing continuations.** The attractors that organize the maps are not greedy loops. No value of $\alpha$ between 0 and 0.12 (in steps of 0.0005) makes " is it" a greedy cycle: after " it" greedy decoding writes "'s" for $\alpha < 0.105$, and above that, where it writes " is", the next greedy token after " is" is not " it". The 2-cycle exists only because the soft token is a mixture. After " is", the fed-back vector mixes " it" and " there"; after " it", it mixes " is" and "'s". Each step thus feeds back a weighted blend of two continuations, and the blends close into a cycle that greedy decoding never closes. Such a compromise lives in a band of temperature and dies at both of its ends. At $\alpha = 0.070$ the 2-cycle is stable between $\log_{10} T = -0.5147881$, where a multiplier reaches $-1$ (a flip: the competition becomes too sharp, and the blend alternates), and $\log_{10} T = -0.1741065$, where a multiplier reaches $+1$ (a fold, the cyan curve of Figure 10). The period-3 loop of the crescent, "\n\nThe existence", is a compromise of the same kind, between " existence" and " question" in the noun slot. It too lives in a band, between a fold above (at $\alpha = 0.065$, extrapolated to $\log_{10} T = -0.14536$ from a continuation whose last converged multiplier was 0.956) and a flip below. It does not connect to a zero-temperature loop.

**What happens at the two ends.** Beyond the fold the 2-cycle is gone, but its ghost delays every trajectory that passes near it. The number of laps $N$ spent there grows as the inverse square root of the distance to the fold, so periodic windows of period $2N + 6$ line up parallel to the fold curve and crowd toward it, with distances close to $1/N^2$ (log-log slope $-2.00$; Section 8). This gives the near-vertical fan of stripes. Below the flip, a compromise starts alternating between its two blends, and in the crescent the alternation doubles again and again, a Feigenbaum cascade into chaos (Section 9). The near-horizontal band that crosses the stripes near $\log_{10} T = -0.14$ is the first doubling of the crescent's period-3 loop, continued to larger $\alpha$. At $\alpha = 0.070$ it is bounded by two flips, at $\log_{10} T = -0.1392937$ above and $-0.1414292$ below. The two families cross because each is bounded by its own curves: the stripes by the distance to the fold of " is it", the band by the flips of the period-3 loop.

**Why the two families cross in both orders.** Which family a map shows where they overlap is not decided by either family's curves. In parts of the crossing the crescent's family lies over the stripes, in others a stripe lies over the band, and the order can change from one cell to the next. Every cell of the maps starts from the same state, the embedding of the prompt's last token, so where two attractors coexist a map shows the one whose basin contains that state. To see what the maps hide, we recomputed the window of Figure 11 on a $192 \times 256$ grid as eight maps: one from the fixed start; three from states of the crescent's period-3 orbit, of the band's 6-cycle and of the period-10 stripe; and four sweeps that follow each attractor across the plane as far as they can, with every column (or row) of cells starting from the final states of the previous one, in both directions of $\alpha$ and of $T$ (Figure 42; `docs/sheets/analysis.json`). An independent audit with separate code reproduced every count below from the raw maps.

- *Two overlapping sheets.* We group periodic attractors by the text their loops write, not by continuation. Periodic attractors of the crescent's family (loops that write "\n\nThe ...") were found at 13,585 of the 49,152 cells, and those of the 2-cycle and its stripes (loops that write " is ...") at 36,787. Both exist at 9,675 cells, on a broad arc that covers the crescent and runs under the stripes (Figure 42b). The fixed-start map hides 32 % of the crescent family's cells and 36 % of the 2-cycle family's. Along each temperature row the crescent family's branch is continuous: at $\log_{10} T = -0.1415$ it runs from $\alpha = 0.066$ to about 0.0745, under the stripes (Figure 42d; Figure 43 shows the two sheets in 3D).

- *Selection by the start.* Where the seven other maps find a periodic attractor of only one family, the fixed start reaches the other family at just 70 of those 31,042 cells (0.2 %). Where both families were found, it reaches the crescent's family at 65.4 % of the cells and the 2-cycle's family at 28.5 % (the rest are chaotic or unresolved). In the crescent zone the split is 70 to 29 %; across the band it is 48.5 to 48.0 %, with the choice alternating from cell to cell, which is the alternating order seen in the map. Of the map's 1,376 edges between periodic cells of different families, 557 are pure switches: each side's family was also found on the other side, and only the basin that holds the fixed start changes. At 662 one side's family was not found on the other side by any map, and at 157 neither was. Eight maps cannot find every attractor, so these are not proofs that a family ends there, and the switch count is a lower bound.

- *The crescent's own edge is a switch.* At each temperature the crescent's period-3 orbit exists from its fold onward, but the fixed start reaches it only farther right: in a strip up to $1.1 \times 10^{-3}$ wide in $\alpha$ both coexist and the map shows the 2-cycle (Figure 44). At $\log_{10} T = -0.148$ the map's existence edge, $\alpha = 0.06444$, coincides with the fold found by continuation, 0.064444. The strip narrows to the grid spacing toward the top of the crescent. At $(\alpha, \log_{10} T) = (0.06468, -0.148)$, inside the strip, interval arithmetic proves that the 2-cycle and the 3-cycle coexist and that both attract (the parameters are read as exact binary64 rationals, and the temperature is the real number $\exp(\ln 10 \cdot \log_{10} T)$ for that exact $\log_{10} T$; Appendix L).

- *Chaos.* Almost all chaotic attractors (96 % of the chaotic cells) visit the crescent family's blank-line and "The" tokens, including the chaos between the stripe windows, so the chaotic regions cannot be assigned to the 2-cycle's side alone.

Why the fixed start lands where it does is not explained by its nearness to either attractor. At three crescent cells random starts (single token embeddings and mixtures of the top 64) reached the 2-cycle in 82 to 90 % of cases, and the nearest attractor phase predicted their destinations worse than always guessing the 2-cycle (`docs/basins/basins-summary.json`). The newline that ends

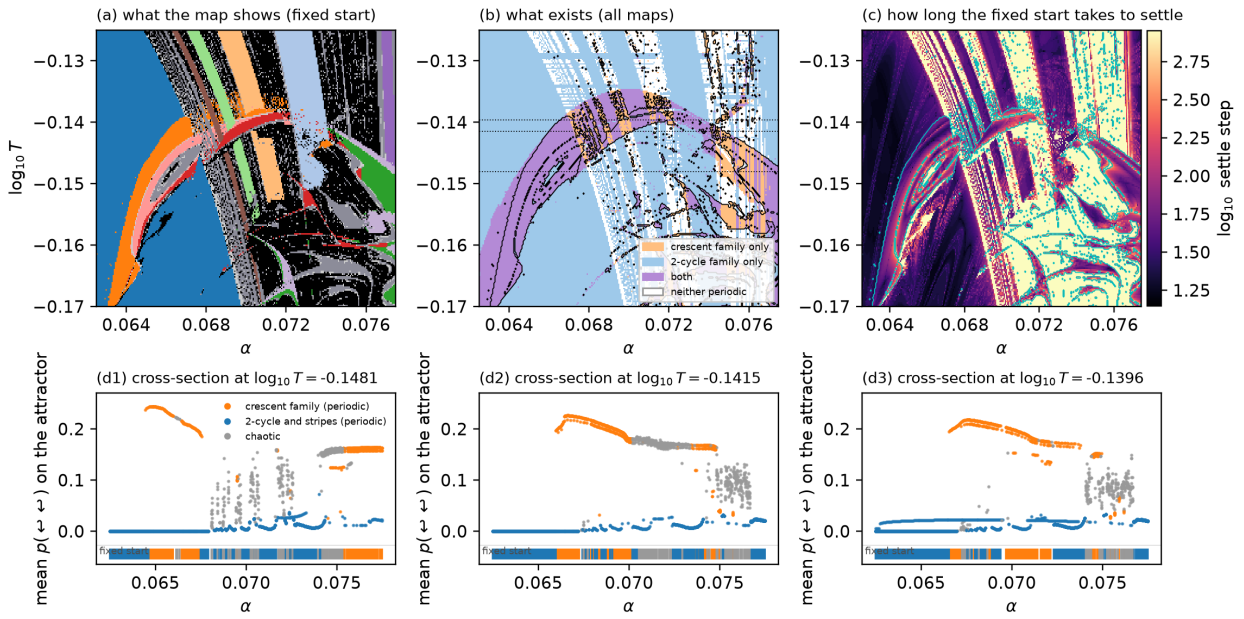


**Figure 42:** What the fixed-start map shows, and what it hides (Qwen2.5-0.5B-Instruct, philosophy direction at layer 12, float64; the window of Figure 11 on a $192 \times 256$ grid). (a) The attractor reached from the fixed start (colors as in Figure 11; black: chaos). (b) Where periodic attractors of each family exist, according to all eight maps of the run: four starts (the fixed start and states of the crescent's period-3 orbit, the band's 6-cycle and the period-10 stripe) and four adiabatic sweeps; black contour: where the fixed start reaches the crescent's family. (c) How many steps the fixed start takes to settle. (d) Cross-sections along three temperatures: the mean probability of the blank-line token on the attractor reached in each map against $\alpha$, colored by family, with the family the fixed start reaches shown as a ribbon at the bottom. The crescent family's branch (orange) continues under the stripes while the fixed start switches between the two branches.

the prompt happens to lie in the crescent's basin over most of the overlap, even though that basin is the smaller one for random starts. Settle times give no sign of long transients at the switches (median 94 steps near the edges and 87 elsewhere), so these basin boundaries do not hold trajectories for long. Refined at single switches, both mechanisms appear. Along two short transects through the band, chosen from the fixed-start map before the other maps were inspected ($\alpha = 0.0708$ from $\log_{10} T = -0.1440$ to $-0.1396$, and $\log_{10} T = -0.1396$ from $\alpha = 0.0690$ to $0.0700$), we bracketed every switch of the fixed start's family by bisection, to 1/64 of the transect spacing at three of the eight switches and to 1/4 or 1/2 of it at the other five, where the bisection met a third loop; at both ends of each bracket we ran the fixed start, continued each end's attractor at the other end and computed the multipliers of every periodic orbit found (`tools/sheets_transect.py`). Of the eight switches, two are selections (each side's family persists on the other side, all four orbits attracting, and only the basin that holds the fixed start changes), two are intrinsic (one side's family does not persist across the bracket), and four remain unresolved, involving chaos or an orbit that converges too slowly near its doubling; a calibration bracket at the crescent's edge is a selection, as expected. A classifier fixed before the run compared continuation arms arriving from opposite sides and classed none of the first seven switches as selections; we replaced it, before any cross-test data, with the test above, and both results are kept (`docs/research-log.md`).

**Why one dimension.** A single step of the map is not close to rank one. Along these orbits, the second eigenvalue of the readout covariance $\Sigma_p$ is 0.23 to 0.87 of the first, and the second singular

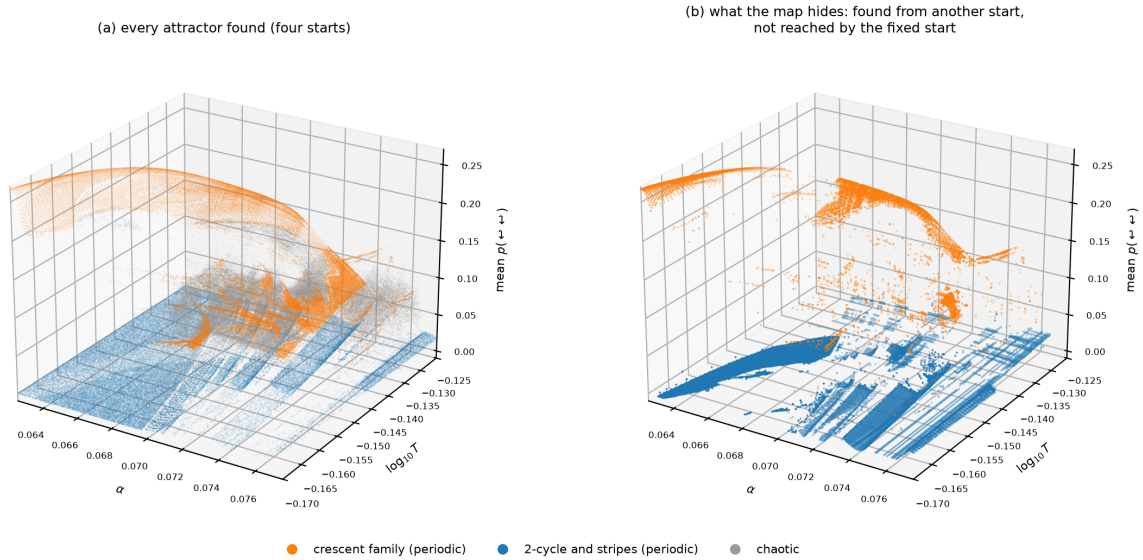


**Figure 43:** The two families as sheets. Each point is an attractor found at one cell of Figure 42, at a height equal to its mean probability of the blank-line token: about 0.2 for the crescent's family (orange), about 0 for the 2-cycle and its stripes (blue); gray: chaos. (a) Everything found by the eight maps. (b) Only what the fixed-start map hides: periodic attractors found from another start at cells where the fixed start reaches something else.

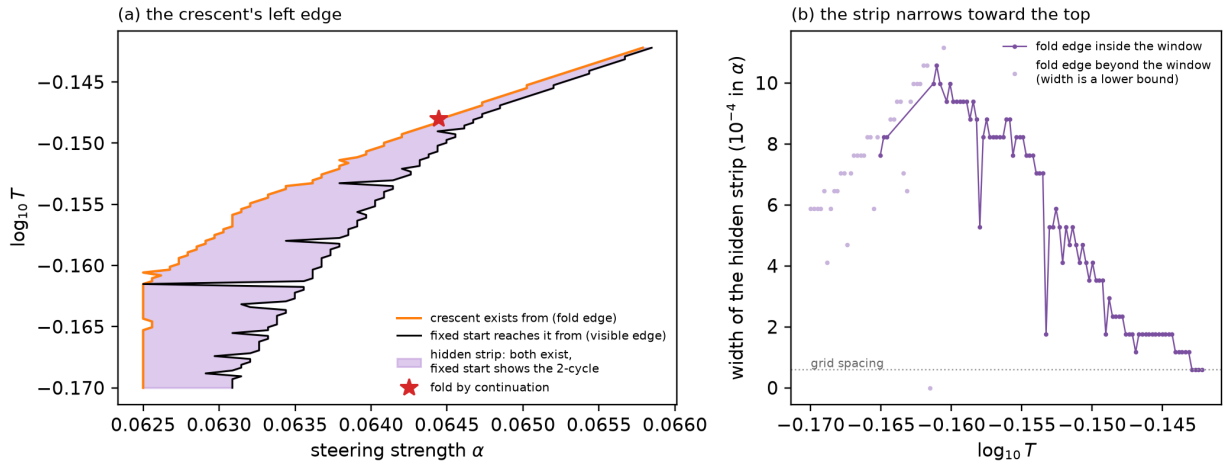


**Figure 44:** The crescent's left edge is a switch, not its fold. (a) Along each temperature, the smallest $\alpha$ at which the crescent's periodic family exists in any map of the run (orange) and the smallest at which the fixed start reaches it (black); between them (purple) both exist and the map shows the 2-cycle. Star: the period-3 fold found by continuation at $\log_{10} T = -0.148$. (b) The width of that strip; pale points: rows where the fold lies beyond the window, so the width is a lower bound.

value of the step derivative is 0.11 to 0.90 of the first. Composed over a cycle, however, the map is nearly one-dimensional. The ratio of the two leading singular values is 0.081 for the 2-cycle, 0.092 for the period-3 loop and 0.26 for the period-6 band; it falls to $3 \times 10^{-4}$ over twelve steps of the chaotic crescent and to $4 \times 10^{-9}$ in the chaotic stripes. Each step stretches some direction, but different steps stretch different ones, and only the direction along which the competition between two continuations repeats keeps growing over a cycle. The Lyapunov spectra say the same. At three chaotic cells the leading exponents are 0.109, 0.424 and 0.239 per step, the next three lie between $-0.82$ and $-2.01$, and the Kaplan–Yorke dimension is 1.13, 1.43 and 1.21 (spectra over 600 steps; over 3000 steps the leading exponents are $0.098 \pm 0.010$, $0.437 \pm 0.016$ and $0.196 \pm 0.014$, Section 16). Of the four computed exponents one is positive and three are strongly negative. These finite spectra and the singular-value ratios support strong effective contraction in the sampled directions and motivate scalar approximations: on the sampled range, the crescent's attractor gives a scalar return relation with a single extremum (Figure 45e). The measured cascade separately provides finite evidence consistent with Feigenbaum scaling (Section 9); no global one-dimensional invariant reduction is established. A scalar model built from the two competing tokens, $q' = \sigma(h(q)/T)$, reproduces the crescent's hump (Figure 45e) and, at $\log_{10} T = -0.156$, places its first flip between $\alpha = 0.0646$ and 0.0648, against 0.0644767 in the full map. It does not reproduce the cascade, so the competition sets the shape, while the rest of the network sets where the cascade ends.

**The picture.** At zero temperature, away from ties, the loop writes greedy loops. As the temperature rises, the soft token starts to mix the two continuations a token has, and the mixtures form new periodic orbits that greedy decoding does not have. The two we continued each live between a flip, where the competition is too sharp, and a fold, where it is too weak. Their folds leave ghosts that line up the windows, and their flips start cascades into chaos. One competition stretches while the rest of the network contracts. This supports describing these structures by one-dimensional maps, as Feigenbaum's ratios suggest, although no global one-dimensional reduction is established. Steering moves which continuations compete, and so where all of this happens.

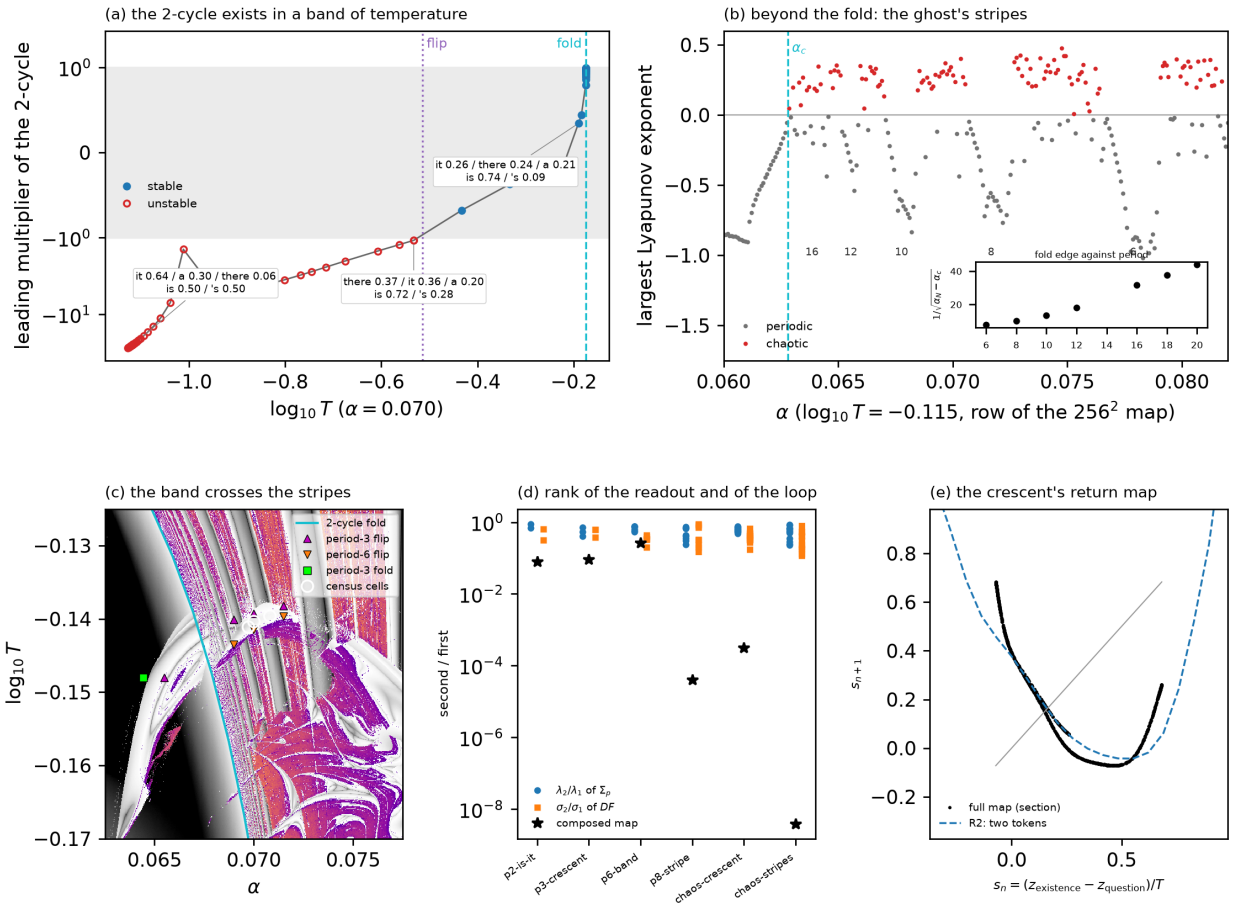


**Figure 45:** One picture, in float64 (Qwen2.5-0.5B, philosophy direction, layer 12). (a) Leading multiplier of the " is it" 2-cycle along temperature at $\alpha = 0.070$. It is stable (blue, inside the gray band $|\mu| < 1$) only between the flip ($\log_{10} T = -0.5148$) and the fold ($-0.1741$). The boxes give the two blended continuations at each phase of the cycle, with their probabilities. (b) Largest Lyapunov exponent along the row $\log_{10} T = -0.115$ of the $256 \times 256$ map. Beyond the fold $\alpha_c$ of the 2-cycle, periodic windows (gray, labeled with their periods) alternate with chaos (red). Inset: $1/\sqrt{\alpha_N - \alpha_c}$ for the fold edges of the windows against their period. For the longer windows (periods 16 to 20) it grows linearly with the period, as the ghost predicts (Section 8). (c) Part of the crossing map, with the fold curve of the 2-cycle (cyan). The period-6 band is bounded by the flip of the period-3 orbit above and the flip of the period-6 orbit below, located on cuts at $\alpha = 0.069$, 0.070 and 0.0715. On the cut $\log_{10} T = -0.148$, the crescent's period-3 orbit is born at a fold ($\alpha = 0.06444$) and flips at $\alpha = 0.06548$. White circles: the census cells. At the two in the overlap all ten starts ended on the band's 6-cycle; at the third (0.0708, $-0.1396$) one of five starts ended on a period-10 loop. (d) Second over first eigenvalue of the readout covariance $\Sigma_p$ and second over first singular value of the step derivative $DF$ at every recorded state of four periodic orbits and two chaotic attractors, and the same ratio for the derivative composed over one period, or over twelve steps for the chaotic cells (stars). (e) Return map of the crescent's attractor in the noun log-odds $s$ (black), with the two-token model $q' = \sigma(h(q)/T)$ (dashed).

## 13 Beyond the one-token loop

The soft-token map feeds back one expected embedding at a fixed prefix and position. This section summarizes what changes when the loop keeps more context, when tokens are sampled and in other models (details in Appendices G and H); Sections 14 and 15 then follow model size and a second system.

**Memory and sampling.** As $T \to 0$ the soft-token map tends to a map with finitely many values that agrees, away from ties, with greedy decoding with the same finite memory, so every orbit of the limit ends in a cycle (Appendix G). Fed back the last 8 or 16 soft tokens instead of one, Qwen2.5-7B is chaotic at 21 and 20 of 24 temperatures, against 8 with one. In Soft Thinking's growing context, where every soft token stays visible, an early perturbation of $10^{-10}$ grows exponentially in the same model inside its one-token chaotic band. This does not hold in every model: in Qwen2.5-0.5B the growth moves to sharper distributions, outside its narrow one-token chaotic band, and Qwen2.5-72B stays nearly insensitive (Section 14). Sampling is different. When the expected embedding is replaced by the mean of $m$ sampled token embeddings, the laminar phases of the bottleneck, 120 steps long in the exact map at the closest offset, last about 10.6 steps with $m = 64$ and 7.7 with $m = 8$, and with single samples essentially none remain. The deterministic intermittency belongs to the expected-embedding map; sampling noise turns the bottleneck into a noise-limited trap whose strength grows with $m$.

**Other models.** The organization recurs in Qwen2.5-1.5B (Figure 46) and 7B, in OLMo-2 7B, in Llama-3.1 8B, whose attractors we also read with sparse-autoencoder features, and in a second checkpoint of the 0.5B architecture, which shares the organization but not the attractors (Appendix H). The fold law of Section 8 recurs at 1.5B and 7B: windows accumulate on the fold of a short cycle, and the nearest four resolved windows meet a criterion fixed before the lines were computed, within 0.12 % at 1.5B and 4.5 % at 7B (a correction of the period selector after the first scoring is disclosed); farther out, the 1.5B windows spread by 10.3 to 14.0 %.

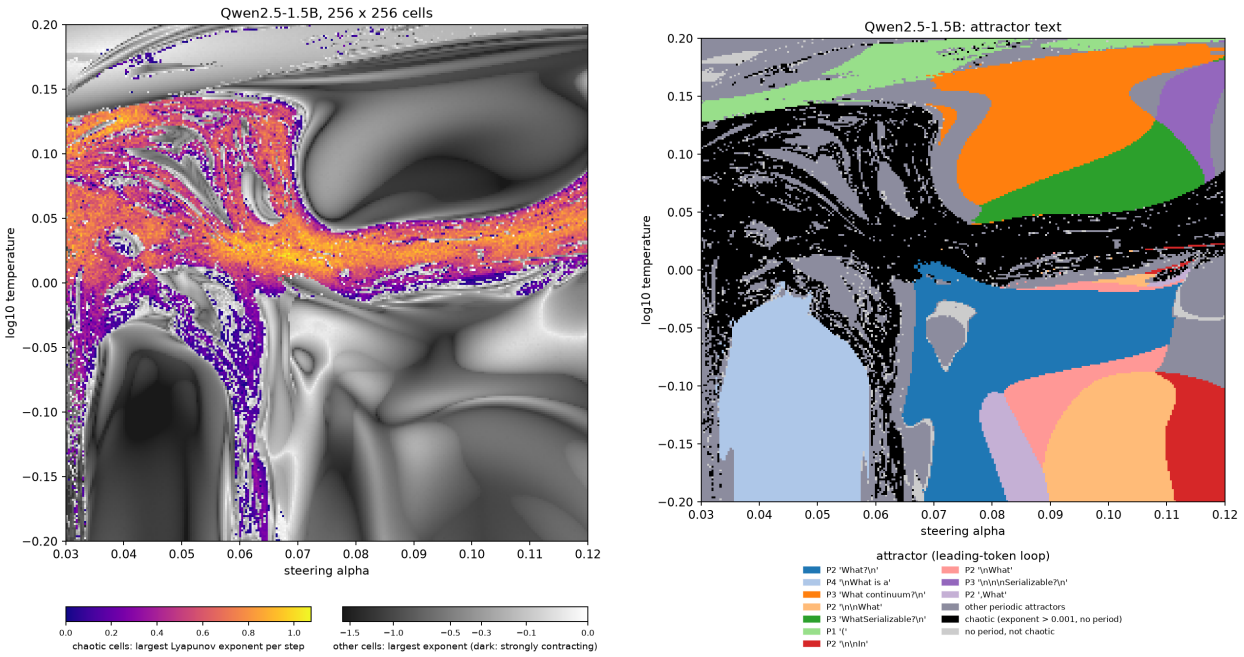


**Figure 46:** Qwen2.5-1.5B soft-token map steered along the philosophy direction at layer 14, $256^2$ float64 cells over $\alpha \in [0.03, 0.12]$, $\log_{10} T \in [-0.2, 0.2]$: largest Lyapunov exponent (left, colored as in Figure 1) and attractor texts (right, as in Figure 11). Several period-2 label regions touch without a gap; as explained in Appendix B, such boundaries may be label switches of one orbit.

## 14 Chaos and model size

Is the chaos of the loop a small-model effect that larger models leave behind? We measured the unsteered map of fifteen models: Qwen2.5 at seven sizes from 0.5B to 72B parameters, OLMo-2 at 1B, 7B, 13B and 32B, Llama-3.1 at 8B and 70B, Llama-3.3-70B, and the mixture of experts Qwen3.5-35B-A3B, all with the paper's prefix and the settings of Appendix B (1000 transient and 2000 measured steps in float64; chaotic: an exponent above $10^{-3}$ and no detected period, which is what "positive" abbreviates below). The stored checkpoint values are evaluated in float64 (Appendix B, "Precision"), and the 70B-class models, spread over two GPUs, were recomputed where an earlier two-GPU computation was less precise (Appendix I). The 7–8B and 70B-class models had shown a steep decline of chaos with size. Before measuring the others we fixed three predictions that extrapolate it (`docs/scaling-predictions.md`): within each family, every model above 8B is less chaotic than the family's 7–8B model (P1); the chaotic share does not increase with size above 7B (P2); and at matched next-token entropy, both gain factors of Section 3 of the 14B and 32B models lie at or below those of the 7B model (P3). After a review pointed out that a single prompt and a fixed temperature window could mislead, we froze a fourth test across ten prompts (`docs/prefix-scale-test.md`).

**In a fixed temperature window, chaos seems to fade with size.** Table 18 and Figure 47 give each model's chaotic share of the temperatures in $\log_{10} T \in [-1, 0.3]$, the range common to all sweeps, and the chaotic length of its whole temperature axis. In two families the largest models are nearly free of chaos in this window. Qwen2.5-7B is chaotic at 12.7 % of the temperatures in the common range, and the 14B, 32B and 72B models at none. Llama-3.1-8B is chaotic at 19 %, Llama-3.1-70B, from the same release and training recipe, at 2.3 %, and Llama-3.3-70B, which differs

from Llama-3.1-70B only in post-training, at none. In the third family the order fails: OLMo-2-32B is the most chaotic OLMo model, at 16.2 % against 6.2 % at 7B, 3.8 % at 1B and none at 13B. (The 32B model is a later release, 0325, than the 7B and 13B models, 1124, so within OLMo-2 size and release are confounded.) The frozen predictions P1 and P2 hold for Qwen2.5 and fail for OLMo-2. Below 7B we predicted no order, and none appears (Qwen2.5 0.5B, 1.5B and 3B: 1.4, 1.5 and 0 %).

**What a loop without chaos writes at 70B.** Not chaotic does not mean a single repeated token. Over its 128 temperatures ($\log_{10} T$ from $-1$ to 0.3; 1000 transient and 2000 measured steps), the unsteered Llama-3.3-70B settles on long cycles. At low temperature, at 46 of the 49 temperatures from $\log_{10} T = -1$ to $-0.5$, it writes a fifteen-token loop without end, `. It'supgrading the infinite possibilities are you'recognized protocols` (the tokens run together as written). At intermediate temperatures period-16 variants end in `established` (15 temperatures) or `acknowledged` (9), and a period-21 variant turns into `... of a fellow AI to another artificial greetings` (8). Higher temperatures give cycles of 24 to 63 steps, and 19 temperatures have neither a period up to 64 nor a positive exponent. Llama-3.1-70B, which differs only in post-training, mostly writes the three-token loop `to another AI` (31 temperatures) or the four-token loop `. It'sup` (21), longer repetitions of `to another AI` with periods 6 to 18, and at four temperatures the fixed point `It`, a single token repeated. Steering changes this picture (Figure 49): along the hostility direction, fixed points fill the plane above the chaotic band and windows of periods 3 to 13, most often 6, lie below it.

**Across prompts, the chaos moves to higher temperature instead.** The fixed window hides where larger models are chaotic. The frozen prompt-blocked test compares Qwen2.5-7B and -14B on ten system prompts and openers (two for development, eight held out), over $\log_{10} T \in [-0.4, 0.9]$ (48 temperatures) and then over the temperature interval where each model's next-token entropy rises most (24 temperatures), with twins at offsets $10^{-5}$ and $10^{-7}$; a temperature counts as chaotic only when both exponents are positive (Figure 77). It predicted that the 14B model would be less chaotic. Both predictions fail: on all eight held-out prompts the 14B model is chaotic at more of the 48 temperatures (9 to 17, against 0 to 7 for the 7B), and its largest exponent is lower on only three. Every chaotic temperature of the 14B model, on all ten prompts, lies between $\log_{10} T = 0.36$ and 0.90, at and above the temperature where its next-token distribution spreads (0.35–0.65); the 7B model's chaos lies mostly between 0.21 and 0.43, around its own, lower transition (0.21–0.46). On the paper's prompt, 12 of the 48 coarse temperatures of the 14B model are chaotic, from 0.59 to 0.90, and the adaptive fine stage found one more near 0.519; the initial sweep of Table 18 ended at 0.6 and saw only the lower edge (the table now also includes the upper sweep). Within Qwen2.5, then, the larger model is not less chaotic: its distribution stays sharp up to higher temperature, and its chaos sits there. The decline in the fixed window is largely a shift. A second frozen test (`docs/prefix-scale-olmo.md`; stage 1 only, four held-out prompts) asked whether the OLMo-2 order survives other prompts. It does, with small counts: OLMo-2-32B is chaotic at more of the 48 temperatures than OLMo-2-7B on three of the four prompts (4, 5, 3 and 0 against 3, 0, 1 and 3), as predicted, and its chaos again lies somewhat higher ($\log_{10} T = 0.10$–$0.35$ against $-0.01$–$0.21$).

| model | params (B) | chaotic, $[-1, 0.3]$ (%) | unres. | sweep, $\log_{10} T$ | chaotic dec. | breadth | max $\lambda$ |
|---|---|---|---|---|---|---|---|
| Qwen2.5-0.5B | 0.5 | 7/512 (1.4) | 1 | $-1.0$ to 0.3 | 0.018 | 0.053 | +0.28 |
| Qwen2.5-1.5B | 1.5 | 2/130 (1.5) | 0 | $-1.0$ to 1.2 | 0.531 | 0.191 | +0.85 |
| Qwen2.5-3B | 3.1 | 0/130 (0.0) | 0 | $-1.0$ to 1.2 | 0.030 | 0.060 | +0.85 |
| Qwen2.5-7B | 7.6 | 65/512 (12.7) | 6 | $-1.0$ to 1.2 | 0.226 | 0.249 | +0.88 |
| Qwen2.5-14B | 14.7 | 0/130 (0.0) | 0 | $-1.0$ to 1.2 | 0.500 | 0.191 | +1.14 |
| Qwen2.5-32B | 32.8 | 0/130 (0.0) | 0 | $-1.0$ to 1.2 | 0.010 | 0.091 | +0.36 |
| Qwen2.5-72B | 72.7 | 0/128 (0.0) | 0 | $-1.0$ to 1.2 | 0.000 | 0.014 | $-0.45$ |
| Llama-3.1-8B | 8.0 | 96/512 (18.8) | 2 | $-1.0$ to 1.2 | 0.241 | 0.634 | +0.66 |
| Llama-3.1-70B | 70.6 | 3/128 (2.3) | 28 | $-1.0$ to 0.3 | 0.031 | 0.307 | +0.41 |
| Llama-3.3-70B | 70.6 | 0/128 (0.0) | 19 | $-1.0$ to 0.3 | 0.000 | 0.225 | $-0.27$ |
| OLMo-2-1B | 1.5 | 5/130 (3.8) | 0 | $-1.0$ to 1.2 | 0.050 | 0.322 | +0.23 |
| OLMo-2-7B | 7.3 | 32/512 (6.2) | 3 | $-1.0$ to 1.2 | 0.083 | 0.197 | +0.30 |
| OLMo-2-13B | 13.7 | 0/130 (0.0) | 0 | $-1.0$ to 1.2 | 0.000 | 0.131 | $-0.0007$ |
| OLMo-2-32B | 32.2 | 21/130 (16.2) | 0 | $-1.0$ to 1.2 | 0.252 | 0.694 | +0.62 |
| Qwen3.5-35B-A3B | 35.0 | 0/128 (0.0) | 15 | $-1.0$ to 0.3 | 0.000 | 0.143 | $-0.27$ |

**Table 18:** Unsteered soft-token maps of fifteen models (float64; 1000 transient and 2000 measured steps; one twin offset). Chaotic: exponent above $10^{-3}$ and no period up to 64; unres.: temperatures in $[-1, 0.3]$ with neither a detected period nor a positive exponent. Chaotic decades: the grid-weighted extent of the temperature axis labeled chaotic over the whole sweep, each temperature weighted by its grid spacing (an estimate of the sampled extent; models whose sweep stops at 0.3 have incomplete coverage); max $\lambda$: the largest exponent on the sweep, rounded to two decimals (OLMo-2-13B: $-6.7 \times 10^{-4}$); breadth: decades in which the mean next-token entropy on the orbit lies between 1 and 10 nats. The Qwen2.5-72B sweep joins two grids that share $\log_{10} T = 0.3$, counted once; for the 7–8B models the share in $[-1, 0.3]$ comes from their 512-temperature sweeps, on which the frozen predictions are scored, and the whole-axis columns also include sweeps over $[-1, 0.6]$ and $[0.61, 1.2]$ (64 temperatures), as for the other models swept to 1.2. Positive cells found later on finer lines (Qwen2.5-32B, -72B; Llama-3.3-70B) are not in these regular-grid counts.

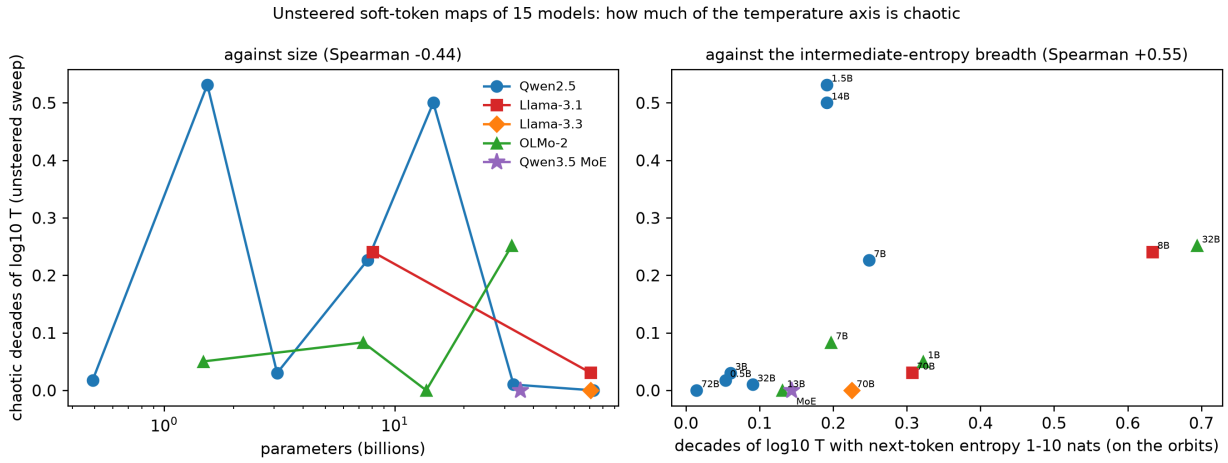


**Figure 47:** How much of the temperature axis is chaotic, for the fifteen unsteered maps of Table 18: against parameter count, by family (left), and against the breadth of the intermediate-entropy regime (right). Spearman correlations over the fifteen models. Each model's sweeps cover the range listed in Table 18; those of the two Llama-70B models and the mixture of experts end at $\log_{10} T = 0.3$, so their values are lower bounds. The breadth is measured on the loop's own orbits; the loop-free test of the same idea is in Appendix I.

**What sets it: the gain of the loop.** The gain split of Section 3 shows which factor removes or keeps the chaos (Figure 78). We compare medians of the two factors in bins of the mean next-token entropy on the orbit; the bins hold 1 to 17 of each model's 24 temperatures, so single medians are noisy. Within one training recipe, from Llama-3.1-8B to Llama-3.1-70B, the readout factor changes by at most 0.3 per step in every bin above one nat (below one nat the 8B model has a single temperature), while the network factor is lower by 0.5 to 1.3 per step between 1 and 10 nats (6–10 nats: median $-0.98$ from 3 temperatures against $+0.28$ from 4) and by only 0.18 above 10 nats: in these two checkpoints the larger model damps changes of its fed-back token. Llama-3.3-70B, which differs from Llama-3.1-70B in post-training, has a much lower readout factor below 3 nats (1–3 nats: $-2.33$ from 7 temperatures against $-0.10$ from 6) and a similar one above 6 nats. In Qwen2.5, both factors of the 14B and 32B models lie below the 7B's in every bin between 1 and 10 nats, as the frozen prediction P3 states (the 6–10 nat bin only with the 7B's wider gain split, from one temperature), and both factors of the 72B lie below the 7B's in every bin. Above 10 nats, where the distribution is nearly uniform, the 14B and 32B models instead have the larger network factor ($+2.98$ and $+1.17$ against $+0.19$), and those are the bins of their chaotic temperatures above $\log_{10} T = 0.3$. Below 3 nats the readout factor dominates at 32B and 72B, because the next-token distribution stays sharp up to high temperature (for the 72B, entropy at most 0.15 nats up to $T = 2$). In OLMo-2, P3 fails, and the readout factor tracks the chaos: OLMo-2-13B, with no chaotic temperature, has a lower readout factor than OLMo-2-7B in all three bins between 1 and 10 nats ($-1.0$ to $-1.4$ against $+0.06$ to $-0.72$ per step) although its network factor is higher in two of them, whereas OLMo-2-32B, the most chaotic OLMo model, has a higher readout factor than the 7B in all three ($+0.10$ to $+0.35$), positive as in the chaotic 7–8B models. These are descriptive comparisons of trained checkpoints, not interventions on size or post-training: the split is a decomposition along the evolving tangent direction, and equal entropy does not imply equal embedding covariance. Entropy clamping tests at 72B whether forcing an intermediate entropy suffices to destabilize the loop. If its loop were stable only because its distribution jumps from sharp to flat, holding the distribution in between should destabilize it. We therefore choose each step's temperature so that the next-token entropy equals a target and sweep the target instead of the temperature (entropy-clamped decoding; the map stays deterministic, and the entropy holds to $10^{-14}$). The temperature then depends on the state, $T = \tau(x)$ with $H(x, \tau(x)) = H_\star$ for the entropy $H$, so the derivative of the clamped map $\hat{F}(x) = F(x, \tau(x))$ gains a rank-one term, $D\hat{F} = D_x F - \partial_T F \, D_x H / \partial_T H$. We therefore take its exponents from twins of the clamped map itself, temperature solve included, and use no fixed-temperature derivative or gain split for it. The safeguarded solve is only piecewise smooth, but on these orbits one-step central differences at $10^{-5}$ to $10^{-7}$ agree with those at $10^{-4}$ within $6 \times 10^{-6}$. Held at any of 16 targets between 1 and 11 nats, Qwen2.5-72B has only periodic orbits, the echo of period 2 on the paper's prompt and periods 1 to 19 on a held-out prompt, with twin exponents between $-0.08$ and $-4.5$ that agree within 0.004 across offsets $10^{-5}$ to $10^{-7}$, whereas Qwen2.5-0.5B under the same clamp is chaotic at 6.1 nats. The clamped 72B loop thus stays stable even where its readout is spread. The clamp changes the map, so this is consistent with damping by the network in the original map but does not identify it. The pretrained checkpoint is also mostly non-chaotic. A test frozen before its data (`docs/prefix-scale-72b-base.md`) predicted that the pretrained base model of the same size would be chaotic at three or more temperatures more than Qwen2.5-72B-Instruct on at least three of the four held-out prompts. It fails on all four: the base model is chaotic at 1, 0, 0 and 0 of the 48 temperatures (and at 2 on the paper's prompt; computed after the precision fix, with 500 transient and 1000 measured steps, half the Instruct model's horizon), although its next-token distribution spreads over 2.5 to 5.5 times the temperature range (intermediate-entropy breadth 0.28 to 0.61 decades against 0.11 to 0.22) and from lower temperatures on. At 72B, then, the sharpness that post-training adds does not explain the stability, and post-training is not necessary for it;

the failed prediction does not quantify post-training's other effects. The gain split points to the network's damping of the fed-back token (the 72B's network factor lies below the 7B's in every entropy bin), and the breadth that orders the fifteen models (Figure 47, right) fails for this pair. The damping holds when the whole context is kept as well: in Soft Thinking's growing context (Appendix G), an early perturbation grows at none of eleven steered cells, six of them chaotic as one-token maps, and at one of 48 unsteered temperatures on two prompts, transiently.

**Where the network damps.** The network factor can be resolved through the stack. Let $h_l$ be the residual stream at the soft token's position entering block $l+1$, and $\delta h_l$ its change. The factor then splits exactly into three terms: the growth of the change through the stack, $A_L = \log(\|\delta h_L\|/\|\delta x\|)$; minus the growth of the residual stream itself, $N_L = \log(\|h_L\|/\|x\|)$; plus the final normalization. The difference $A_l - N_l$ is the log of the relative change after $l$ blocks (Appendix B).

We measured this split along the unsteered loop of fourteen models at 24 temperatures each (Figure 48). At 0.3 to 6 nats, the entropies where the loop's chaos occurs at low temperature, the median network factor falls with size in two of the three families.

- In Qwen2.5 it falls from $-0.12$ at 0.5B to $-1.99$ at 72B, though not monotonically ($-1.80$ at 3B, $-0.85$ at 7B).
- In Llama-3 it falls from $-0.14$ at 8B to $-1.50$ and $-1.30$ at 70B.
- In OLMo-2 it does not fall: $+0.11$, $-0.52$, $-0.79$ and $-0.36$ from 1B to 32B. OLMo-2-32B, the family's most chaotic model, is the least damped of its three larger models.

Qwen2.5-72B is the only Qwen2.5 model whose network factor stays negative at nearly uniform distributions: $-1.12$ above 10 nats, against $+0.22$ to $+2.97$ for the 1.5B to 32B models, as its stability under entropy clamping suggests.

The profiles through depth show where the difference arises. Near 1 nat, the change of the fed-back token keeps pace with the growing residual stream in the small models: entering the last block their relative change is $-0.32$ (Qwen2.5-0.5B) and $-0.51$ (Llama-3.1-8B). It does not keep pace in the large ones, where it is $-2.51$ (Qwen2.5-72B) and $-2.08$ (Llama-3.1-70B): their blocks keep writing a growing state that depends little on the fed-back token.

Sublayer knockouts hold one attention or MLP output at the soft token at its unperturbed value. They find no component that does the damping: at each model's knockout temperature nearest 1 nat (entropies 0.12 to 1.61 nats), removing any single sublayer raises the network factor by at most 0.44 nats in any of the fourteen models. The amplification moves instead.

- In the Qwen2.5 models from 1.5B to 32B, the first attention layer amplifies the change: removing it lowers the factor by 1.67 to 3.74 nats near 1 nat.
- In the 0.5B model, the first MLP does (2.40).
- In Qwen2.5-72B and in both 70B Llama models, no sublayer contributes more than 0.46.

The larger models' damping is therefore not added by a component. The early amplification that lets the change keep pace with the residual stream is weaker or absent. These are descriptive comparisons of trained checkpoints within three families, and the OLMo-2 exception shows that training can break the trend.

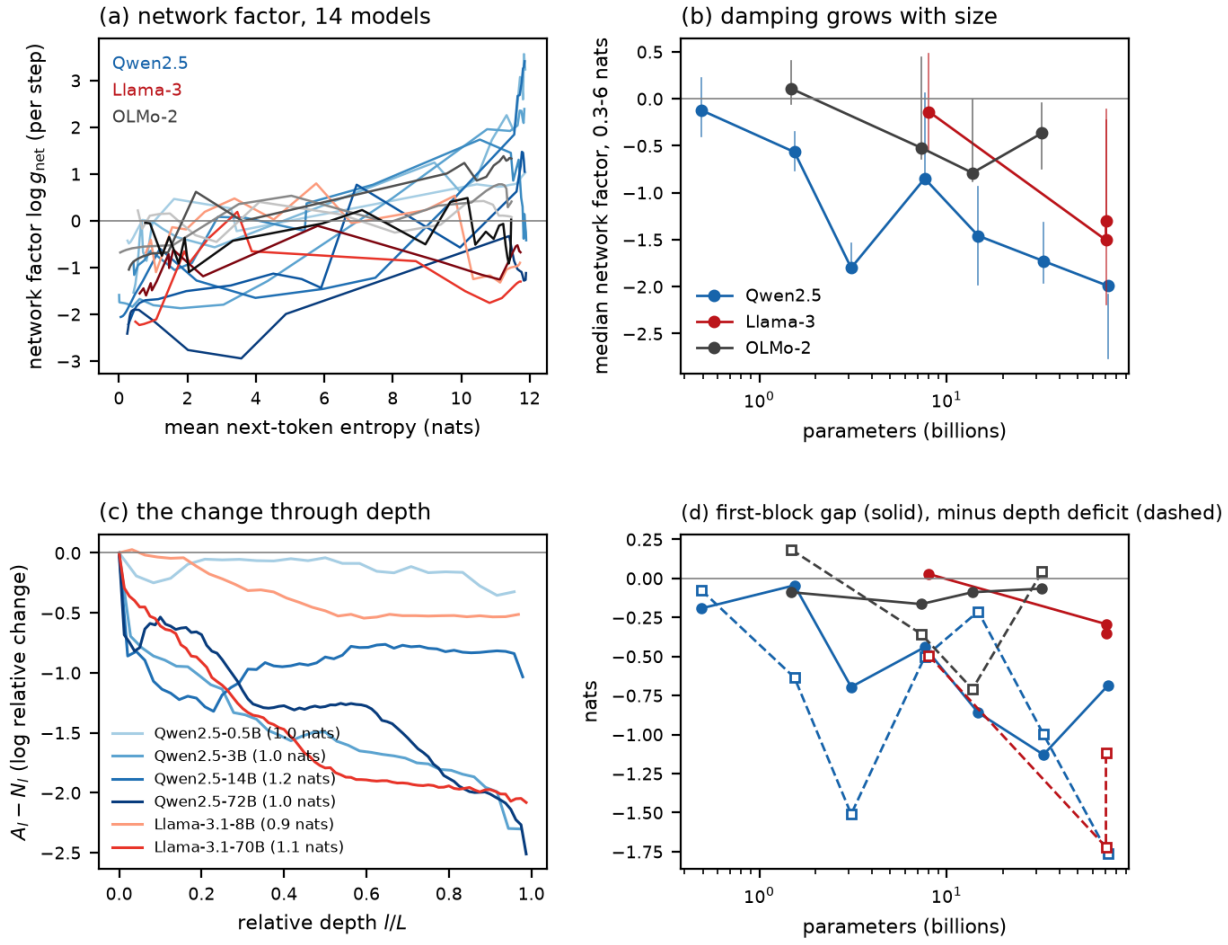


**Figure 48:** Where the network damps a change of the fed-back token. Unsteered loop on the paper's prompt, 24 temperatures per model, float64; a twin at relative offset $10^{-7}$ along the evolving tangent; 500 transient and 500 measured steps. (a) Network factor against the mean next-token entropy on the orbit, for fourteen models (Qwen2.5 blue, Llama-3 red, OLMo-2 gray; darker for larger models). (b) Median network factor between 0.3 and 6 nats against the number of parameters; bars give the range of the medians in the bins 0–1, 1–3 and 3–6 nats. (c) The log relative change $A_l - N_l$ after $l$ blocks against relative depth, at each model's temperature nearest 1 nat. (d) The two parts of the final relative change at that temperature: the gap after the first block, $A_1 - N_1$ (solid), and the deficit from the second block on, $(N_L - N_2) - (A_L - A_2)$, drawn with a minus sign (dashed); the increment through the second block itself is not shown. The profiles use block inputs, so the last value is the relative change entering the last block.

**Mixtures of experts.** A mixture-of-experts layer sends each token to a few of many expert networks, those with the largest router scores, so its map is smooth only between routing boundaries. Two questions follow: whether routing switches drive the measured exponents, and whether a model that is large in total but small per token behaves like a small or a large dense model (Figure 76, Appendix H). We followed the unsteered loops of Qwen3.5-35B-A3B (8 of 256 experts per layer; about 3B of its 35B parameters are active per token) and OLMoE-1B-7B (8 of 64; about 1B of 7B). Along them, a twin at relative offset $10^{-7}$ never chose different experts from the base orbit, at any step, layer or temperature. Freezing its routing to the base orbit's left the network factor unchanged, so the exponents measure the smooth map. The orbits do pass close to routing boundaries. At each step we recorded the smallest gap between the eighth and ninth largest router logits over all layers; its median along a loop lies between $1.1 \times 10^{-4}$ and $1.75 \times 10^{-2}$, and its minimum is about $3.38 \times 10^{-7}$. Rounding errors of bfloat16 inference (relative precision about $4 \times 10^{-3}$) can cross gaps this small, so in low precision routing can add jumps that the float64 exponents do not contain.

On size, the mixture of experts behaves like a large dense model, not a small one. Two dense models of its family share its hybrid attention: Qwen3.5-4B, about its active size, and Qwen3.5-9B. Both are chaotic. Unsteered, they are chaotic at 19 and 10 of 128 temperatures; steered, at 15 % and 7 % of a philosophy map and at 32 % and 16 % of a hostility map. The mixture of experts is chaotic at none of the 128 temperatures and none of the philosophy cells, and irregular at 5 % of the hostility cells. Its median network factor between 0.3 and 6 nats is $-1.90$, against $+0.05$ and $-1.41$ for the two dense models and $-1.73$ for the dense Qwen2.5-32B. Within this family, chaos falls and damping grows from 4B to 9B to the mixture of experts, which damps more than a dense model with three times its active parameters. Routing a token through about 3B parameters therefore does not make the loop behave like a 3B model.

**What this implies for larger models.** Size does not set this chaos in a simple way. In Qwen2.5, the 14B model's chaos did not vanish but moved to higher temperature, to where its next-token distribution spreads; in OLMo-2 the largest model was the most chaotic; two 70B Llama checkpoints with different post-training gave different results on the same grid; and at 70B, chaos that passes a three-offset test remains, rarer, with and without steering (Appendix I). The shift does not continue to Qwen2.5-72B. A prompt-blocked test frozen before its data (`docs/prefix-scale-72b.md`) predicted that the 72B model would be chaotic at fewer of the 48 temperatures than the 14B on at least three of four held-out prompts. It is chaotic at 0, 1, 0 and 0 of them, against 14, 9, 11 and 15, so the prediction holds on all four. These lines ran before the precision fix (1000 transient and 2000 measured steps, twins at $10^{-5}$ and $10^{-6}$, chaotic only when both exponents are positive); no temperature on them is positive at only one offset, and the one chaotic temperature ($\log_{10} T = 0.319$, exponents 0.35 and 0.34) is chaotic again when recomputed in float64 throughout, with an automatic-differentiation tangent exponent of 0.34. With the paper's prompt, where it showed no robust chaos up to $\log_{10} T = 1.2$, that makes five prompts on which the 72B model is nearly free of unsteered chaos. Its next-token distribution jumps from sharp to nearly uniform within less than the grid spacing (0.03 decades), so a narrow chaotic band at the jump would be missed by the grid. Fine lines through the jump, computed in float64 throughout with automatic-differentiation tangent exponents, find only periodic orbits on the paper's prompt and on three of the four held-out prompts, and on the fourth a band of chaos about 0.02 decades wide just above the jump ($\log_{10} T = 0.319$–$0.336$; exponents up to 0.40, which twins at $10^{-5}$ to $10^{-7}$ reproduce within 0.004), at nearly uniform distributions, as the 14B model's chaos but far narrower. A fixed temperature window is therefore the wrong yardstick, and so is size alone. A model's chaos follows the gain of its loop where its own next-token distribution is spread, no single forward pass we tested predicts it (Appendix I), and to

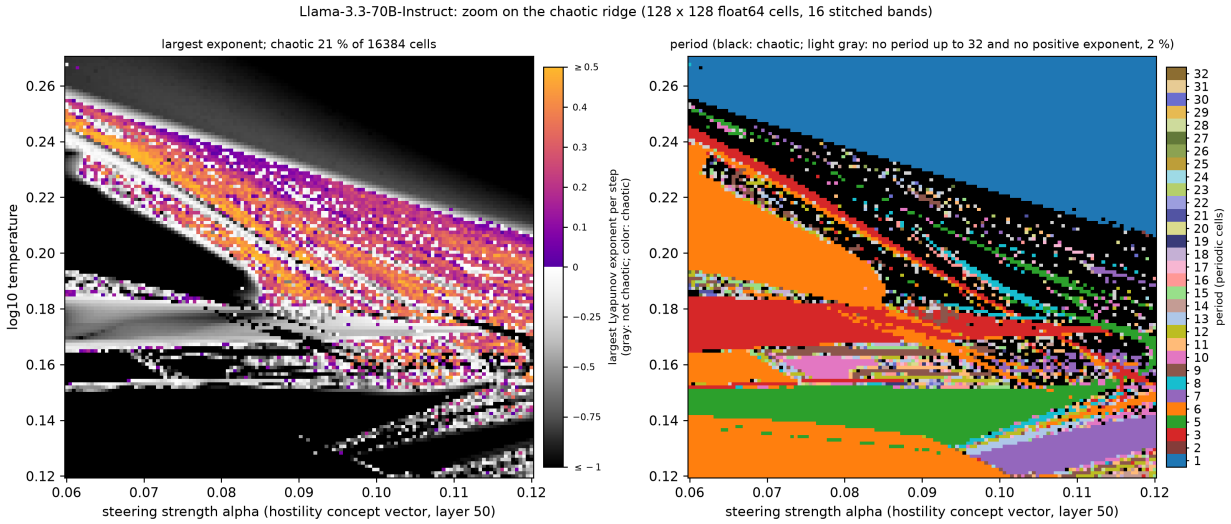


**Figure 49:** Chaos at 70B parameters: the soft-token map of Llama-3.3-70B-Instruct steered along its hostility concept vector at layer 50, $128 \times 128$ float64 cells over $\alpha \in [0.06, 0.12]$, $\log_{10} T \in [0.12, 0.27]$ (300 transient and 300 measured steps; sixteen bands of eight temperatures computed separately with identical vectors and joined). Left: largest Lyapunov exponent, gray where the cell is not chaotic and in color where it is; 3410 of the 16,384 cells (20.8 %) are chaotic (largest exponent 0.64). Right: period of the attractor reached from the fixed start (black: chaotic; light gray: neither a detected period up to 32 nor a positive exponent, 1.7 % of the cells). The chaotic band's center falls from $\log_{10} T \approx 0.23$ at $\alpha = 0.06$ to $\approx 0.19$ at $\alpha = 0.12$, and periodic windows thread it, most often of periods 3, 5, 6 and 7 and up to 13; fixed points lie above it.

find it in a larger model one has to run the loop there, across prompts. For frontier models this means two things: their unsteered chaos may be rare, if, like the largest models here, their distributions spread over a narrow range of temperature; and steering still drives both 70B-class models that we steered, Llama-3.3-70B and Qwen2.5-72B, into chaos (Appendix I). Resolved through the stack, the damping grows with size in Qwen2.5 and Llama-3 because the change of the fed-back token stops keeping pace with the residual stream (Figure 48). If larger models of these families continue the trend, their unsteered loops need stronger token competition to become chaotic, which steering can still supply; this is an extrapolation from checkpoints up to 72B, and OLMo-2 does not follow it. Figure 49 shows it at 70B parameters: in a $128 \times 128$ float64 scan of Llama-3.3-70B-Instruct steered along its hostility direction, computed after the precision fix, 20.8 % of the 16,384 cells are chaotic, in a band threaded by periodic windows, as in the 0.5B model's maps; a test of 24 sampled cells at three twin offsets and an automatic-differentiation tangent confirms 11 of the 12 chaotic and 5 of the 6 periodic labels (Appendix I).

## 15 A second system: recurrent depth

Huginn-0125 iterates a recurrent block at fixed input tokens [3]. For a GSM8K-style [67] prompt, the native loop converges to a fixed point whose leading Jacobian pair is $0.588 \pm 0.771i$ (modulus 0.970). For the relaxed loop $h \leftarrow (1-\lambda)h + \lambda F(h)$, whose multipliers are $1 - \lambda + \lambda\mu$, this predicts that the pair crosses the unit circle at $\lambda_c = 2(1 - \operatorname{Re}\mu)/|1-\mu|^2 = 1.0775$, transversally and away from the strong resonances (at 0.156 of a revolution per step), consistent with a Neimark–Sacker bifurcation. Below it the latent state decays; above it the state settles on a closed curve. A fit of the squared amplitude gives $\lambda_c = 1.0778$, with $A/\sqrt{\lambda - \lambda_c} = 0.52$–$0.54$. A stable circle that grows like

the square root of the distance is consistent with a supercritical Neimark–Sacker bifurcation; we did not compute its first Lyapunov coefficient, so its nondegeneracy is not established. Causal attention makes the loop block lower-triangular in token positions. The first position to oscillate is the "." of the prompt, and all later positions follow. On the invariant circle the motion turns by 0.156 of a revolution per step, matching the argument of the critical pair. The rotation number changes smoothly, by about $10^{-4}$ over $\lambda \in [1.079, 1.092]$, and no return within 60 steps was found at $10^{-3}$ of the radius. This is consistent with quasi-periodic motion, although locking in narrow high-order tongues cannot be excluded. From $\lambda \approx 1.094$ the circle deforms or a second frequency appears, near where a second complex pair destabilizes the fixed point ($\lambda = 1.0814$). Fixed-point and Jacobian stability of looped models has been studied before [17]; what this adds is the predicted crossing, its amplitude law and the rotation number.

**The spectrum predicts the relaxation response.** With the full instruction template, the GSM8K prompts' fixed points look different: the leading multipliers surround the origin, a real 0.914, complex pairs of modulus 0.85–0.89 at many angles and negative real values near $-0.8$, with no near-critical pair. Because the prefill Jacobian is block lower-triangular in positions, its spectrum is the union of per-position blocks, and template positions contribute identical eigenvalues to every prompt. Such a spectrum makes three predictions before any task is scored. First, within the computed spectral estimates of these prompts, no fixed relaxation can speed convergence much. With leading multipliers spread around the origin at many angles, any $\lambda$ that shrinks one group enlarges another, and the best $\lambda^* = 1.03$–$1.06$ lowers the rate from 0.914 to only 0.908–0.911. (A finite computed spectrum does not show that no other polynomial scheme could do better; Anderson acceleration, tried below, did not.) Second, under-relaxation slows convergence ($\lambda = 0.55$: predicted 0.953, measured 0.951 on one prompt). Third, over-relaxation destabilizes the negative modes first, at $\lambda_c = 2\,\mathrm{Re}(1-\mu)/|1-\mu|^2 = 1.074$–$1.126$ (five prompts), in a flip or a Neimark–Sacker bifurcation close to $-1$. The approach to it is visible: on the prompt with $\lambda_c = 1.074$, the measured rate at $\lambda = 1.05$ is 0.955 against a predicted 0.956 (native 0.864). Elsewhere the spectral radius bounds the rate measured over the accessible window from above, by up to 0.05, because the slowest modes carry little amplitude there. Independently, Wang et al. [68] report a Huginn GSM8K drop from 19.41 % to 8.34 % at a constant step of 1.2; at 0.8 GSM8K is 19.79 %, while their four-task mean falls slightly. Their trajectory-based scheduling analysis does not compute the prompt-specific spectral thresholds studied here.

**Does the task notice? (development data).** On ARC-Challenge [69] questions scored by log-likelihood, where one prefill per answer choice is exactly the analyzed recurrence, the spectra again predict convergence. Rates agree to 0.002–0.006 where the slowest mode dominates, and beyond each question's $\lambda_c$ (1.075–1.149 for four questions) the residual stops decaying. For 6 of 30 development questions the native fixed point is itself unstable ($\rho(1) = 1.009$–$1.273$; the fixed point, located with a relaxed transient, has a real multiplier beyond $-1$ or a complex pair outside the circle). The native loop then oscillates (relative amplitude $2 \times 10^{-2}$ for one of them), and relaxation to 0.55 or 0.75 restores convergence to $10^{-6}$. For the other 24, no unstable mode was detected in the computed spectral estimates up to $\lambda = 1.020$–$1.149$ (median 1.095); partial Ritz spectra cannot exclude an undetected unstable mode. Question by question, an estimated spectral feature ranks the question's residual. This feature, $\hat{\rho}_q(\lambda)$, is the largest $|1 - \lambda + \lambda\mu|$ over the computed Ritz values of the question's gold-answer prefill, and its Spearman correlation with the residual is 0.73 at $\lambda = 1$ and 0.75 at 1.10 over the 30 questions (development data). In this historical analysis the residual was the all-choice aggregate entering the 32nd recurrence call, so this is a predictive association

across related maps and precisions, not a same-state contraction identity. It is consistent with the latent orbits that Geiping et al. [3] observed on some tokens of harder questions, here traced to the fixed point's spectrum. The item-level part of the frozen test below uses matched gold-row token IDs and a per-row residual with an explicit clock.

Accuracy, however, tolerates the instability (300 training questions, 32 steps): it is 0.367 native, 0.387 at $\lambda = 1.10$ and 0.373 at 1.15, where the latent state oscillates with relative size 0.08 and 0.23. Only at 1.25 (size 0.68) does it fall, to 0.300. Yet the oscillation does reach the answers. Reading every step from 24 to 32 on 100 questions, the margin between the correct choice and its best rival moves by 0.11 nats per step natively, 0.37 at 1.10 and 0.95 at 1.15, in alternating directions, and the chosen answer changes within these nine steps for 12 %, 16 % and 33 % of the questions. The changes go both ways, so the accuracy at any one step stays the same on average. Under-relaxation instead costs 4–5 points at 8–16 steps and catches up by 32 (a slower transient), and Anderson acceleration neither speeds the transient nor gains accuracy. Testing the accuracy consequence therefore needs a task in which such step-to-step changes can compound.

GSM8K generation is such a task. With eight chain-of-thought examples in the lm-evaluation-harness format, greedy decoding and 32 recurrence steps per token (development problems 0–119, every arm on the same problems and initial states), accuracy is 0.375 natively, 0.425 at $\lambda = 1.05$ and at 1.10, 0.29 at 1.15 (17 problems lost and 7 gained, one-sided McNemar $p = 0.03$) and 0.16 at 1.20 (29 lost, 3 gained, $p = 10^{-6}$). Under-relaxation to 0.8 costs nothing at 32 steps (0.41). The break lies between 1.10 and 1.15, at or just above the spectral thresholds ($\lambda_c = 1.074$–$1.126$ for the GSM8K prompts; median upper stability limit 1.095 for the ARC development questions). Generation breaks earlier than log-likelihood scoring, consistent with answer changes that compound over tokens. The collapse at 1.2 is the one Wang et al. [68] reported.

A frozen test on problems not read before it was frozen confirms this. Its design and analysis were pushed before any test item was read, after two rounds of independent review. On 200 GSM8K test problems, accuracy is 0.330 natively, 0.395 at $\lambda = 1.05$, 0.255 at 1.15 and 0.095 at 1.20. The two pre-stated predictions pass: accuracy declines at 1.20 ($-23.5$ points; 50 problems lost and 3 gained, exact one-sided McNemar $p = 3 \times 10^{-12}$), and 1.05 loses no more than four points (difference $+6.5$, one-sided 95 % lower bound $+2.5$). At 1.15 accuracy falls by 7.5 points ($p = 0.01$, reported descriptively). Development and test agree closely (Figure 50).

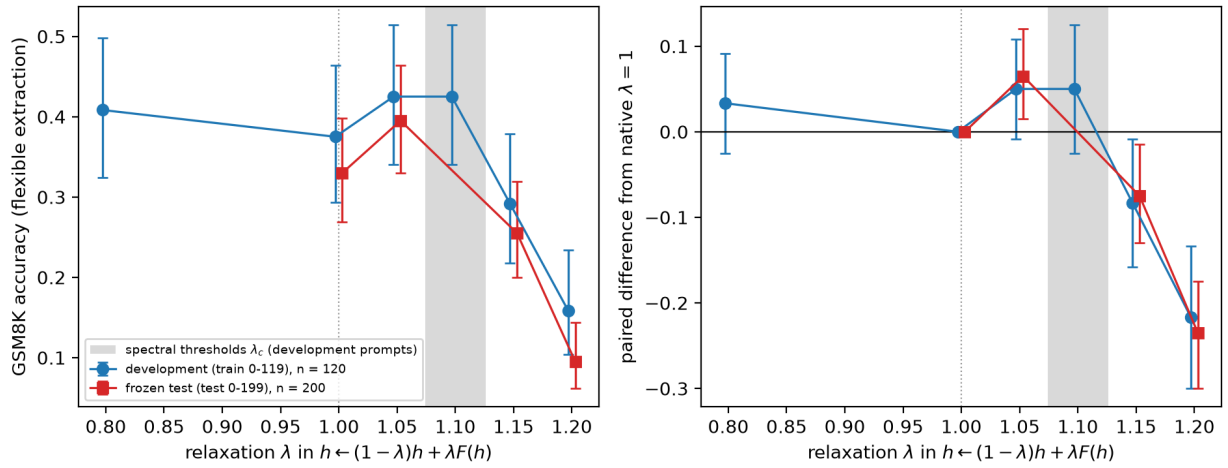


**Figure 50:** Huginn-0125 chain-of-thought accuracy on GSM8K against the relaxation strength $\lambda$ (eight examples, greedy decoding, 32 recurrence steps per token): development problems (blue) and the frozen test on held-out problems (red; design and analysis fixed before any test problem was read). Gray: the spectral thresholds $\lambda_c = 1.074$–$1.126$ computed from the fixed points of five development prompts. Left: accuracy with Wilson 95 % intervals. Right: paired difference from the native loop with paired-bootstrap 95 % intervals.

The same frozen design tested the item-level prediction on 64 held-out ARC-Challenge questions. The first 16 spectra preceded the read-out generation; the remaining ones were completed afterward under a recorded amendment, with the producer attesting that read-out outcomes had not yet been inspected, and duplicate copies were resolved by a rule fixed in advance. Every question passed the admission gates (fixed-point residual at most $2.6 \times 10^{-6}$; identical gold-row token IDs in every arm); for 13 questions one of the three Arnoldi sets was partial, which the design admits for an estimated feature. The pre-stated statistic, the mean of the within-arm Spearman correlations between $\hat{\rho}_q(\lambda)$ and the gold row's residual entering the 32nd update, is 0.701 (95 % bootstrap interval $[0.575, 0.780]$; 0.68, 0.73, 0.73 and 0.67 at $\lambda = 1$, 1.05, 1.08 and 1.10); the frozen primary gate, the interval's lower end above 0.3, is met. On unseen questions, the fixed point's estimated spectrum therefore ranks each question by the size of the gold row's residual entering update 32; a residual is not in general a distance to the fixed point. Descriptively, the share of questions with a detected unstable mode rises from 8 % natively to 34, 69 and 84 % at $\lambda = 1.05$, 1.08 and 1.10. An independent implementation reproduced both parts of the frozen test from the saved data.

## 16 Two loops in conversation

Two instances of a language model left to talk with each other drift into recurring states [13]. The best-known case is the "spiritual bliss" attractor of two Claude Opus 4 instances, whose open-ended conversations end in repeated exchanges of gratitude and silence [70]. The soft-token map poses the deterministic version of the question: can two loops that are each chaotic on their own lock each other into a periodic orbit? Agents A and B are Qwen2.5-0.5B-Instruct with the conversation prompt of a sampled self-dialogue study that we report separately, each with its own steering strength along the philosophy direction at layer 12. They write one reply together, alternating soft tokens, $x_{n+1} = F_A(x_n)$ and $x_{n+2} = F_B(x_{n+1})$, so one exchange is the map $G = F_B \circ F_A$. Equal agents reproduce the single loop bitwise in float64, so on a map over $(\alpha_A, \alpha_B)$ the diagonal holds each agent writing alone (Figure 51).

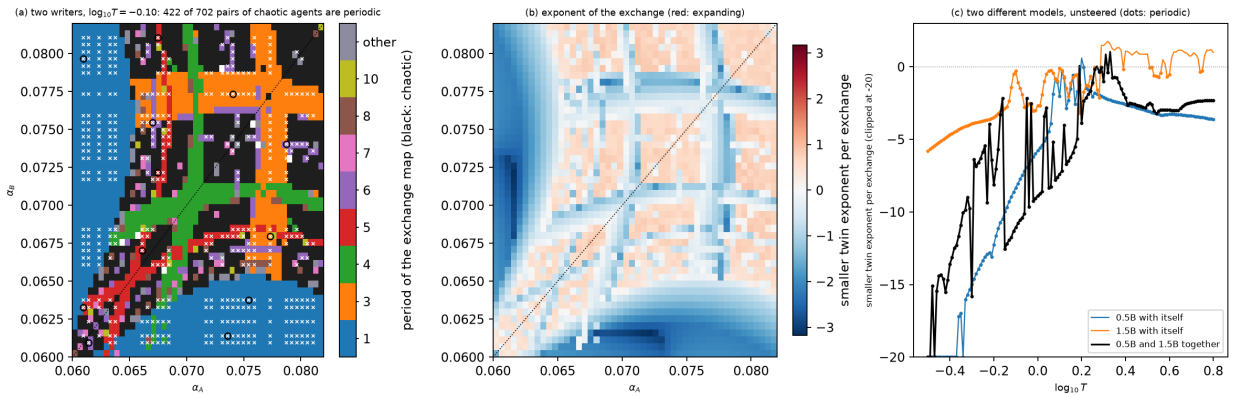


**Figure 51:** Two loops writing one text. (a) Agents A and B (Qwen2.5-0.5B-Instruct, philosophy direction at layer 12, strengths $\alpha_A$ and $\alpha_B$) alternate soft tokens at $\log_{10} T = -0.10$: period of the exchange map $G = F_B \circ F_A$ per cell (black: chaotic). The dotted diagonal holds each agent alone; white crosses mark pairs that are periodic although both agents alone are chaotic, and circles the twelve such pairs verified by Newton's method. (b) The smaller twin exponent of $G$ per exchange on the same cells. (c) Two different models, unsteered: the smaller twin exponent per exchange of Qwen2.5-0.5B and of Qwen2.5-1.5B each writing with itself, and of the two writing together; dots mark periodic cells.

At $\log_{10} T = -0.10$, over $\alpha_A, \alpha_B \in [0.060, 0.082]$ ($48 \times 48$ cells), 27 of the 48 agents are chaotic alone and 21 periodic. Of the 702 pairs whose two agents are both chaotic alone, 422 are periodic together; of the 420 pairs of two periodic agents, 91 are chaotic together. Writing together favors order (70 % of pairs are periodic, against 44 % of single agents), though some chaos is inherited: pairs of chaotic agents are periodic less often than pairs in general. The exponent map is plaid, as if each agent contributed its own stability, and where one agent is weakly steered ($\alpha \lesssim 0.064$) and the other is not, the pair settles into a fixed two-token exchange. Twelve entrained pairs spread over the map all converge under Newton's method to attracting primitive orbits of $G$ (residuals at most $2 \times 10^{-13}$, leading multipliers 0.0008 to 0.79 in modulus, exchange periods 1, 3, 5 and 6). Their texts show how two chaotic writers share a loop. At period 1, A writes "is" and B "it", the single loop's 2-cycle split between two writers. At period 5, B answers "is" every time while A cycles through "This", "there", "it" and "a". That alternating two chaotic maps can produce order is known for quadratic maps [71]; here it happens in a language model's own dynamics.

Two different models behave alike. Qwen2.5-0.5B and 1.5B share a tokenizer, so a message can be passed as a distribution over the shared vocabulary and embedded by each model with its own matrix. Unsteered, the 1.5B writing with itself is chaotic at 41 of 131 temperatures ($\log_{10} T$ from 0.29 to 0.80, exponents 0.21 to 1.76 per exchange), the 0.5B at one. Writing together they are periodic at 39 of those 41 temperatures, mostly in a fixed two-token exchange: the stable partner sets the rhythm. A dialogue framing behaves differently. With each one-token message placed in a user turn and the first token of the reply as the answer, every map we computed is periodic, for one agent alone and for every pair. The reply is decided by the replier's own prompt and steering, and the partner's message barely moves it; mutual locking of the kind seen in long conversations would need longer messages than this frame provides.

**Synchronization of coupled loops.** Alternating writers are one way to couple two loops. The classical way to couple identical chaotic maps is to mix their outputs: each copy of the loop feeds

back a fraction $1-c$ of its own soft token and a fraction $c$ of the other's,

$$x'_A = (1-c)F(x_A) + cF(x_B), \qquad x'_B = (1-c)F(x_B) + cF(x_A). \tag{5}$$

The state where both copies agree, $x_A = x_B$, is then invariant, and on it each copy runs the single loop. The difference $u = x_A - x_B$ evolves exactly as $u' = (1-2c)\,[F(x_A) - F(x_B)]$, which near synchrony linearizes to $u' = (1-2c)\,DF\,u$, so a small difference grows at the rate $\lambda_\perp = \lambda_1 + \ln|1-2c|$, where $\lambda_1$ is the leading Lyapunov exponent of the single loop. Along the synchronized orbit, typical transverse perturbations therefore decay when $\lambda_\perp < 0$, which for $0 \le c \le 1/2$ means $c > c^* = (1 - e^{-\lambda_1})/2$ [72, 73]. This local condition need not imply synchronization from every start. Near $c^*$ the theory predicts on-off intermittency: long synchronized stretches broken by bursts, with stretch lengths distributed as a power law of exponent $-3/2$ [74, 75]. Above $c^*$, unstable periodic orbits inside the attractor that are more expanding than average can still cause bursts (attractor bubbling) [76].

We tested this on three chaotic cells of Qwen2.5-0.5B's loop (philosophy direction, layer 12, float64), with $\lambda_1 = 0.098$, 0.437 and 0.196 per step over 3000 steps, so that $c^* = 0.046$, 0.177 and 0.089 (Figure 52; `docs/sync/sync-summary.json`). The difference's growth rate, measured directly on the coupled map at seven couplings from 0 to 0.30 in each cell, follows $\lambda_1 + \ln|1-2c|$ from $+0.44$ to $-0.82$, within 0.051 at every point. In the first cell the copies synchronized between $c = 0.045$ and 0.05, consistent with $c^*$. In the second they synchronized between 0.18 and 0.19 when "synchronized" means a difference below $10^{-6}$, consistent with $c^*$; on the stricter criterion of $10^{-8}$ they had not synchronized by 0.19. Just below it, at $c = 0.16$ to 0.17, the difference burst 12 to 14 times in 10,000 steps, and the synchronized stretches had a length distribution whose rough log-binned slopes lay between about $-1.8$ and $-1.5$, close to $-3/2$; these descriptive fits, from the few runs with enough stretches, do not establish a power law. In the third cell the copies synchronized robustly only at $c$ between about 0.12 and 0.16, depending on the start and the run length, well above $c^*$. At $c = 0.105$ to 0.115, where the difference should shrink on average, it still burst from the rounding level ($10^{-14}$) to order one, 5 to 10 times in 10,000 steps, as attractor bubbling predicts. We did not compute the exponents of the periodic orbits that would cause it. No noise or mismatch was added; rounding-level differences between the two rows of a batch (below $10^{-15}$) are a plausible seed of the bursts. Synchronized copies write the same text, and their texts sample the single loop's attractor. Below $c^*$, many pairs instead locked onto periodic orbits of the joint state (periods 6 to 12, verified to close within $2.2 \times 10^{-13}$), on which the two copies write different or staggered texts. In the first cell, starts far from the attractor often synchronized onto a second attractor of the single loop, an attracting 2-cycle "it is".

The coupled-agents check of Appendix D differs in one essential way: there the contexts grow, so the two agents are not two copies of a fixed map, and at $c = 0.25$ they barely synchronized although $c = 0.25$ exceeds $c^*$ for all three cells here.

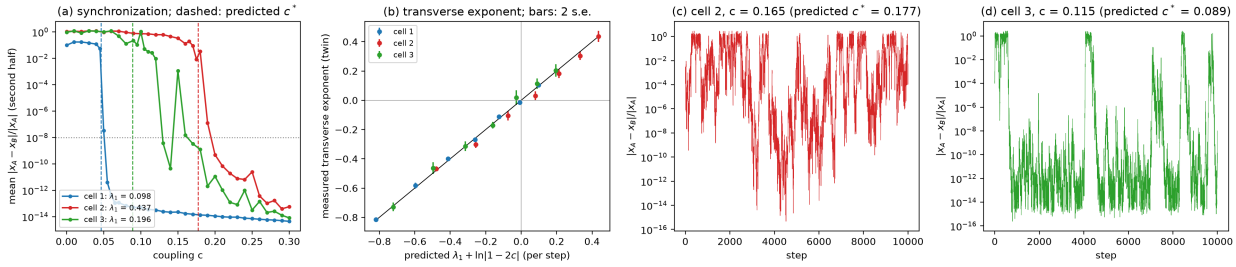


**Figure 52:** Synchronization of two coupled copies of the soft-token loop (Qwen2.5-0.5B-Instruct, philosophy direction, layer 12, float64). (a) Mean relative difference between the copies in the second half of the run against the coupling $c$, for three chaotic cells; dashed, the predicted threshold $c^* = (1 - e^{-\lambda_1})/2$. (b) The difference's growth rate measured on the coupled map against the prediction $\lambda_1 + \ln|1 - 2c|$ (bars: two standard errors). (c) On-off intermittency just below the threshold of the second cell ($c = 0.165$). (d) Bursts above the predicted threshold in the third cell ($c = 0.115$), as in attractor bubbling.

# 17 Discussion

Table 19 lists what each main result rests on: an identity, numerical computation in floating point, a test whose design was fixed before its data, or a computer-assisted proof.

**What theory allows, and what is new.** Chaos and periodic windows occur in many nonlinear feedback systems: random recurrent networks become chaotic above a critical gain [21, 22], and periodic windows, shrimp-shaped domains and doubling cascades are found in low-dimensional maps and in experiments [4, 23, 77]. In our map temperature plays the role of an inverse gain and the steering vector that of an input. The factorization of Section 3 makes this correspondence concrete, but it remains an analogy, not a transfer of the random-network theorems (Appendix C). These results motivate looking for such structure in a language model's feedback map; they do not imply it. This paper shows that the models we studied realize it, with concrete texts as attractors, so that a bifurcation changes what the model writes, and that several prospective quantitative predictions succeeded; the failed all-row criteria and the unresolved cases are reported with them.

**Is steering the origin of the chaos?** No. Without steering ($\alpha = 0$) the map is the model's own feedback map, and temperature alone gives chaos with embedded windows in most dense models we swept (in eleven of fourteen on regular grids). Steering widens the chaotic regions, but not through the concept it names: in the 0.5B model norm-matched random directions are as chaotic as the concept directions, and in Llama-3.1 8B sparse-autoencoder feature, contrastive and random directions all are, with direction-dependent prevalence. What the direction selects is the text of the attractors (Appendix J).

**What is and is not claimed.** The objects studied here are invariant sets and bifurcations of an exactly defined smooth map built from a frozen model's own computation. The answer-level reproducibility tests use two Qwen2.5 models (0.5B and 7B), one task family and a soft-thinking pipeline without the top-$k$ filtering of the published method, and their bfloat16 effect does not require the float64 map's chaos: in float64 no answer changed in the 0.5B model, and 5 % changed in the 7B model, whose loop expands at the temperature tested (Section 6). The mechanism of Section 3 is measured along three directions in a 0.5B model and one in a 7B model, and at high temperature the network factor can carry the instability. The loop's regime does not mark

**Table 19:** What each main result rests on. *Prospective*: the design, data and criteria were fixed and pushed before the data were collected; *partly prospective*: some predictions or criteria were. Only the period-8 orbit and the coexisting period-2 and period-3 orbits are proved; chaos labels are finite-horizon numerical results. Each *code* entry links to the main tool or record in the project repository.

| **Result** | **Evidence** | **Status** | **Code** |
|---|---|---|---|
| Mechanism | | | |
| Factorized derivative of the loop | identity; checked to $10^{-13}$ | identity | code |
| Steering's growth is readout-side | crossover along orbits; logit bias | partly prospective | code |
| Chaos and its consequences | | | |
| Chaos in 15 models | tangent exponents; 74–92 % last $10^5$ steps | numerical | code |
| Batch layout splits chaotic loops | paired float64 runs, 4 models | numerical | code |
| Batch layout changes answers | arithmetic, GSM8K, reasoning | prospective | code |
| Chaos does not predict accuracy | regression on newly drawn problems | prospective | code |
| Bifurcations and scaling laws | | | |
| Windows accumulate on folds ($1/N^2$) | fold-edge fits; forecasts within 3 % | partly prospective | code |
| Passage times from normal forms | 42 of 48 within one iterate | prospective | code |
| Cusps and their unfoldings | unfoldings fixed before solving | partly prospective | code |
| Feigenbaum ratios | flips by continuation | numerical | code |
| Period-5 shrimp (domain, legs, head) | followed attractor, curves | numerical | code |
| Crossing window families | eight maps; independent audit | numerical | code |
| Attracting period-8 orbit | interval arithmetic | **proof** | code |
| Coexisting attracting 2- and 3-cycles | interval arithmetic | **proof** | code |
| Beyond the one-token loop | | | |
| Steering history changes a decision | new instances | prospective | code |
| Huginn loses accuracy as predicted | generation test | prospective | code |

the accuracy of ordinary sampled answers beyond the model's first-token uncertainty, and when slight steering moved a prompt's loop into chaos no change of that accuracy was detected (+0.36 points, $[-0.36, 1.08]$; Appendix D). We do not claim that ordinary sampled generation is chaotic in this sense (Appendix G), nor that any window is a certified shrimp. The period-5 window is a numerically verified shrimp (Section 11): its attractor, followed cell by cell, fills a body with legs and doubling shells bounded by continued fold and flip curves with located cusps, with a closed trace-zero curve and two dovetails; none of it is proved, no two-dimensional reduction of its dynamics is established, and its head is not that of a one-dimensional shrimp. The period-6 and period-7 windows have fold-and-flip skeletons with located cusps, and in the hostile period-7 body the candidate superstable arcs (sign changes of the leading real multiplier) avoid each other where a head would be. Symbolic sequences are determined for the period-6 window only (paragraph "Symbolic dynamics"); we have not traced tails, tested for a periodicity hub [54, 55], or shown that a two-dimensional map reproduces the windows' nonlinear dynamics. The cusps are float64 computations validated by step-size checks, not proofs (Appendix E).

**Limitations.** The detailed orbit studies cover Qwen2.5 at 0.5B and 1.5B, with three float64 orbits at 7B; OLMo-2 7B and Llama-3.1 8B have maps but no continued orbits. The size comparison rests on regular temperature grids and mostly one twin offset per label, and part of the 70B-class maps predate a precision fix and were rechecked only in samples. The maps use one prompt, apart from 22 variants of the 0.5B standard plane (more in the size tests), and steering uses contrastive vectors, checked against random and sparse-autoencoder directions in two models. Chaos labels are finite-horizon estimates: a longer horizon check kept 86 and 92 of 96 chaotic labels in two maps, near the accumulation of a cascade transient chaos makes labels less reliable (on one line only 135 of 235 chaotic labels held), the chaotic cells are numerically validated (twin exponents agree with automatic-differentiation tangents, across precisions and horizons) but not yet established by a computer-assisted proof, and three periodic orbits have such proofs: the period-8 orbit and a coexisting period-2 and period-3 pair. The Feigenbaum ratios are finite-order values. All orbit, bifurcation and chaos results concern the soft-token map, not sampled generation with a growing context. Appendix K gives the details.

**Steering strength is a bifurcation parameter.** In the soft-token map, small changes of the steering strength switch the model between distinct repeating texts, chaos and coexisting attractors. Near a fold curve, behavior becomes intermittent, with laminar phases whose duration the fold's normal form predicts in advance. This argues for treating an activation-steering coefficient in a continuous-feedback loop like any control parameter of a nonlinear system; whether the same holds for ordinary generation is not tested here. Its bifurcation set should be characterized before an operating point is chosen, history dependence should be expected near boundaries, and a monotone, smooth dose response should not be assumed. In a test fixed before its data, the history of a steering schedule did change a decision with right and wrong answers: after a brief excursion to stronger permissive steering and back, Qwen2.5-3B-Instruct, thinking in soft tokens, wrongly allowed 13 percentage points more of the prohibited access requests at the same final strength (Appendix D). There the memory most plausibly lies in the growing context, not in coexisting attractors of a fixed-size state. The block at which a vector enters matters as much as its strength. In a 0.5B and a 70B model, earlier injection gives more chaos and brings it to lower temperature, and two vectors at two blocks create chaos where neither does alone (Section 6). Outputs that fall into verbatim repetition at high steering doses are naturally treated as quality failures. In the present framework such loops are candidate attracting periodic orbits, and the dose at which they appear is

a boundary that can be mapped like the others. The deterministic map is where such sets can be defined precisely and computed numerically. Whether its boundaries predict boundaries of sampled behavior is open. The bridge of Appendix G shows that sampling noise shortens the laminar phases of the bottleneck, by an amount that depends on how many samples are averaged.

**What this suggests for interpretability and alignment.** Our results come from open models of 0.5B to 72B parameters and the soft-token loop, but they suggest three things about models whose outputs feed back into their inputs, as in self-dialogue, agent loops and pipelines of model calls. First, where the loop is chaotic, a perturbation of $10^{-6}$ grows to order one, while the loop stays in that regime, within roughly 15 to 50 steps at the largest exponents we measured (those of the unsteered 7B and 8B models, 0.30 to 0.88 per step), and more slowly at smaller ones. Even a complete account of single forward passes then predicts a long trajectory only if the state is known far more precisely than any interpretation supplies. Stepwise summaries can be inconclusive: every step of the period-8 orbit expands some direction while the cycle contracts, so the ordered product of the step Jacobians, not a summary of each step, captures the loop's stability (Section 3). What can remain predictable are the invariant sets, their statistics and the boundaries between them. This extends the analysis of trained recurrent networks through their fixed points [78, 79] to the periodic orbits, chaos and bifurcations of a pretrained transformer. Second, feature dictionaries say which features an attractor occupies, but the boundaries between attractors, which decide what a small change does, are properties of the map's derivatives. That would hold even if most units have one interpretable job, as a recent essay argues for Qwen3-32B [80]; in its pruning tests, too, the answers that change are mostly those the network was already unsure of, much as the loop's chaotic cells are those where next tokens compete. Single neurons are no exception: in the 0.5B model, steering along the output direction of the neuron most specific to philosophy makes 9.9 % of the map chaotic, its index neighbor 5.1 % and a random neuron 12.9 %, against 6.8 to 12.5 % along the concept and Gaussian directions (Appendix J). In our 8B controls, a sparse-autoencoder feature direction, contrastive and random directions all drove the map into chaos (27 to 39 % of cells); at 70B the hostility-related directions gave more chaotic cells than the random ones (4.3 and 3.5 % against 1.1 and 0.2 %, two-GPU maps from before the precision fix; Appendix I). Along recorded orbits, the growth that steering adds comes mainly from the readout, where next tokens compete (Section 3); this is not specific to concept-labeled directions, but a direction's geometry and its meaning can be correlated. Text can also hide the dynamics: the emitted text records only the most probable token, and in the hostile cascade a seven-token text repeats exactly while the probabilities that drive the loop do not repeat over the run and the state underneath is chaotic (Figure 29), so a monitor that reads only the emitted text would call a chaotic regime periodic. Third, conclusions drawn at one operating point need not transfer: which loop a model enters depends on how much context it keeps (Table 23), on the path by which a boundary is approached, and on the sampling noise (Appendix G). Treating a looped model as a dynamical system, with regimes and boundaries to be mapped, rather than as a function to be evaluated point by point, seems to us the appropriate stance for both interpretability and safety evaluation. The reproducibility tests of Section 6 make this concrete: in a chaotic regime the batch a request happens to share can change, after a predictable number of steps, what the loop writes, while in a periodic regime it almost never does (in the 0.5B model, the text changed in 173 of 192 chaotic loops and in 7 of 192 periodic ones). In low precision, continuous feedback makes even short-budget answers depend on the batch, far more often than greedy decoding does; over a long run whose answers the model holds weakly, discrete feedback does too. These findings motivate testing whether interventions in continuous-feedback systems, including steering for safety, alter finite-horizon sensitivity or task-relevant decisions as well as

immediate outputs; such tests would complement research on how latent-reasoning architectures affect chain-of-thought monitorability [81]. We tested no safety property: dynamical instability is neither misalignment nor evidence of it.

**Other inference loops.** Any inference scheme that feeds a network's output or internal state back as its input defines an iterated map, but feedback by itself implies neither convergence nor chaos. The energy-descent argument for the isolated tied readout (Section 3) does not establish convergence of either complete feedback operator studied here. In the soft-token loop we find fixed points, cycles and chaos. In the recurrent-depth model Huginn (Section 15) the loop's derivative is the block's Jacobian, without the readout factor; there we observe convergence and oscillatory instability, predicted from the block's multipliers, and found no chaotic regime. These results motivate evaluating the dynamics of looped and recurrent-depth language models [82, 83] jointly with their number of iterations; they do not establish a general relation between stability and reasoning accuracy, especially at the short horizons of deployed loops, where no attractor need be reached. Agentic loops that sample discrete tokens and tool outputs have no derivative at all; only the zero-temperature limit and the sensitivity measurements of this paper bear on them.

**Is the chaos useful?** The chaos we map is not a source of new content. The chaotic cells of Table 7 recombine the phrases of the neighboring loops in an order that did not settle over the recorded horizon: the trajectory wanders among the ghosts of nearby periodic orbits, which gives variety in sequence but not in substance. The periodic loops are the familiar degeneration of decoding into repetition [25, 26]. Neither regime is good text, and the diversity of ordinary generation comes from sampling and a growing context, which wash out much of this structure (Appendix G). What the chaos does matter for is predictability and control. Positive finite-horizon exponents limit open-loop prediction of a trajectory at fixed state precision (our experiments do not establish mixing or limits on feedback stabilization); a stable attractor is predictable, but it can also hold a model in a state it should leave, such as the hostile loops of Section 10. Whether regimes near the boundary between order and chaos are especially useful, as has been argued for computation in dynamical systems and recurrent networks [84, 85] and shown for signal propagation in deep networks at initialization [86, 87], is open for language models. We tested three versions, and none shows an advantage at the edge. Prompts whose own loop sits at the edge ($|\lambda| \leq 0.1$) are answered no better by ordinary sampling than prompts whose loop is deeply periodic or deeply chaotic (Section 6). Used as a reservoir, the loop remembers a weak injected input best in short stable cycles. Its linear memory capacity falls at every period doubling toward the onset of chaos, does not rise as the exponent approaches zero within a period, and is nearly erased by chaos (Figure 53). In Huginn, whose reasoning is itself a latent loop, a float32 pilot on 40 development problems, separate from the tests of Section 15, recorded the decay rate of every generated token's recurrence. Accuracy holds while that recurrence is comfortably stable and falls as it approaches its edge: it was 0.475 natively and 0.525 at relaxation 1.05, where the token recurrence is nearly as stable as natively (median decay rate 0.921 against 0.912), and fell to 0.375 at 1.15, where the recurrence is near critical (0.981, with about half of the tokens no longer converging). With 40 problems these differences are indicative only.

**Which findings might reach frontier models.** The parts that rest only on structure every smooth softmax-readout language model with a fixed prefix shares should carry over: the factorization of the loop's derivative, contraction at sufficiently high temperature, greedy token cycles at zero temperature wherever the most probable token is unique, and the role of a steering coefficient as a

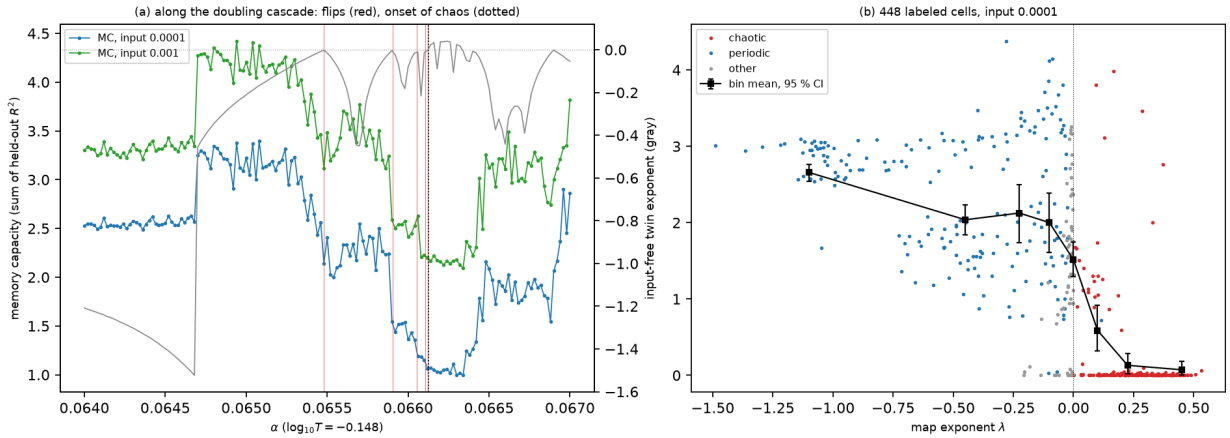


**Figure 53:** Memory capacity of the soft-token loop used as a reservoir (Qwen2.5-0.5B-Instruct, philosophy direction at layer 12, float64). A weak random input enters the map, $x_{n+1} = F(x_n + \epsilon|x|u_n r)$, and linear readouts of the state reconstruct the past inputs; the capacity is the sum of their held-out $R^2$ over 41 delays. (a) Along the doubling cascade at $\log_{10} T = -0.148$: capacity for two input sizes, the input-free twin exponent (gray), the flips (red) and the onset of chaos (dotted). (b) The 448 labeled cells of the horizon check against the map exponent, with bin means and bootstrap 95 % intervals.

bifurcation parameter. The attractor texts, the positions of windows, folds and cusps, and every number we report belong to particular weights; a second checkpoint of the same architecture already has different attractors (Appendix H). Size gives no guarantee of stability (Section 14), hard routing in mixture-of-experts models falls outside the smooth theory of Section 3 (no expert switched along our float64 orbits, but in low precision routing can), and deployed inference samples tokens, in low precision, over long contexts; an 8-bit weight quantization that changes next-token distributions by only 0.003 nats changes the attractor class or period of one start in seven (Appendix D). Closed models permit none of these computations, which need the input embeddings, full next-token distributions and derivatives; for them the method and the questions transfer, not the numbers.

## Code and data availability

The code, the designs of the tests fixed in advance with their audits, the run cards, the failed attempts and hash-bound records of every computation are in the project repository, `https://github.com/tdj28/neural-shrimp`; the links in this paper point to its tag `arxiv-v1`. For the interval-arithmetic certificates the repository holds the verification code, the exact map and input specifications, the release records and hashes of the native evidence. Bulky raw trajectories, model states and the native certificate evidence (center definitions and interval enclosures) are kept outside the repository, which holds their checksums; they are available from the author.

## Funding

This work received no external funding; the author paid for all computation.

## Ethics and responsible use

This study involved no human participants, private conversations or personal data. The access-control requests and their users in Appendix D are synthetic, and the benchmark problems are public; institutional review was therefore not applicable. The released models and benchmarks were used under the terms of their public licenses. Some experiments steer models toward hostile or permissive behavior; they measure the stability of iterated inference and release no harmful outputs. The results concern the auditability and control of iterative pipelines: near a bifurcation, a small change of a steering strength or of the numerical environment can change what such a pipeline does.

## Use of AI assistance

This work was carried out with AI coding and research agents (Anthropic's Claude Code and OpenAI's Codex) working under the author's direction. The agents wrote and ran the code, executed the experiments, checked results against the raw data and drafted text; other AI systems made independent read-only checks of the results and the manuscript. Frozen designs, run cards, failed attempts, audits and hash-bound records of every run are kept in the project repository. The author, whose doctoral research in nonlinear dynamics included work on a periodicity hub of the Rössler attractor [55], directed the study, reviewed the work and takes full responsibility for its content.

## References


[1] Zhen Zhang, Xuehai He, Weixiang Yan, Ao Shen, Chenyang Zhao, and Xin Eric Wang. Soft Thinking: Unlocking the reasoning potential of LLMs in continuous concept space. In *Advances in Neural Information Processing Systems*, volume 38, pages 187190–187212, 2025. doi: 10.52202/085713-5629. URL https://proceedings.neurips.cc/paper_files/paper/2025/hash/f7396d1c54d51416958d63e285377103-Abstract-Conference.html.

[2] Shibo Hao, Sainbayar Sukhbaatar, DiJia Su, Xian Li, Zhiting Hu, Jason E. Weston, and Yuandong Tian. Training large language models to reason in a continuous latent space. In *Second Conference on Language Modeling*, 2025. URL https://openreview.net/forum?id=Itxz7S4Ip3. arXiv:2412.06769.

[3] Jonas Geiping, Sean McLeish, Neel Jain, et al. Scaling up test-time compute with latent reasoning: A recurrent depth approach. In *Advances in Neural Information Processing Systems*, volume 38, pages 46242–46293, 2025. doi: 10.52202/085713-1380. URL https://proceedings.neurips.cc/paper_files/paper/2025/hash/3b01972cf31e6fa0fe29e4b8b5c2a0a1-Abstract-Conference.html.

[4] Jason A. C. Gallas. Structure of the parameter space of the Hénon map. *Physical Review Letters*, 70(18):2714–2717, 1993. doi: 10.1103/PhysRevLett.70.2714.

[5] Xiaojian Li, Yongkang Leng, Ruiqing Ding, Hangjie Mo, and Shanlin Yang. Cognitive activation and chaotic dynamics in large language models: A quasi-Lyapunov analysis of reasoning mechanisms. arXiv preprint arXiv:2503.13530, 2025. URL https://arxiv.org/abs/2503.13530.

[6] Gregorio Jaca, Kristóf Benedek, and János Török. Chaos in reason: How chain-of-thought LLMs can look for an answer. arXiv preprint arXiv:2607.27805, 2026. URL https://arxiv.org/abs/2607.27805.

[7] Julian Arnold, Flemming Holtorf, Frank Schäfer, and Niels Lörch. Phase transitions in the output distribution of large language models. arXiv preprint arXiv:2405.17088, 2024. URL https://arxiv.org/abs/2405.17088.

[8] Kai Nakaishi, Yoshihiko Nishikawa, and Koji Hukushima. Phase transition in large language models and the criticality of natural languages. arXiv preprint arXiv:2406.05335, 2024. URL https://arxiv.org/abs/2406.05335.

[9] Youran Sun and Babak Haghighat. Phase transitions in large language models and the $O(N)$ model. arXiv preprint arXiv:2501.16241, 2025. URL https://arxiv.org/abs/2501.16241.

[10] Huajian Ruan, Jinyang Li, Xingyu Guo, and Lingxiao Wang. Generative criticality in large language model temperature scaling. arXiv preprint arXiv:2606.06238, 2026. URL https://arxiv.org/abs/2606.06238.

[11] Neil F. Johnson, Frank Yingjie Huo, and Bella Xinrui Li. Temperature-driven inversion and nonlinear dynamics in ChatGPT-like AIs. arXiv preprint arXiv:2608.00939, 2026. URL https://arxiv.org/abs/2608.00939.

[12] Zhilin Wang, Yafu Li, Jianhao Yan, Yu Cheng, and Yue Zhang. Unveiling attractor cycles in large language models: A dynamical systems view of successive paraphrasing. In *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 12740–12755. Association for Computational Linguistics, 2025. doi: 10.18653/v1/2025.acl-long.624. arXiv:2502.15208.

[13] Ting-Wen Ko and Jonas Geiping. Attractor states emerge in multi-turn LLM conversations. In *Third Conference on Language Modeling*, 2026. URL https://openreview.net/forum?id=umwOiCSh4I. arXiv:2606.30571.

[14] Shaojie Bai, J. Zico Kolter, and Vladlen Koltun. Deep equilibrium models. In *Advances in Neural Information Processing Systems*, volume 32, pages 690–701, 2019. URL https://proceedings.neurips.cc/paper_files/paper/2019/hash/01386bd6d8e091c2ab4c7c7de644d37b-Abstract.html. arXiv:1909.01377.

[15] Shaojie Bai, Vladlen Koltun, and Zico Kolter. Stabilizing equilibrium models by Jacobian regularization. In *Proceedings of the 38th International Conference on Machine Learning*, volume 139 of *Proceedings of Machine Learning Research*, pages 554–565. PMLR, 2021. URL https://proceedings.mlr.press/v139/bai21b.html.

[16] Akiyoshi Tomihari and Ryo Karakida. Recurrent self-attention dynamics: An energy-agnostic perspective from Jacobians. In *Advances in Neural Information Processing Systems*, volume 38, pages 155236–155269, 2025. doi: 10.52202/085713-4675. URL https://proceedings.neurips.cc/paper_files/paper/2025/hash/cca569b38ec3612904e625dad7a743dc-Abstract-Conference.html.

[17] Xiao-Wen Yang, Ziyu Han, Xi-Hua Zhang, Wen-Da Wei, Jie-Jing Shao, Lan-Zhe Guo, and Yu-Feng Li. Stabilizing recurrent dynamics for test-time scalable latent reasoning in looped language models. In *Proceedings of the 43rd International Conference on Machine Learning*,

volume 306 of *Proceedings of Machine Learning Research*, pages 144670–144682. PMLR, 2026. URL https://proceedings.mlr.press/v306/yang26t.html.

[18] Xinyue Luo and Fei Yu. Prediction dynamics in depth-recurrent language models. arXiv preprint arXiv:2609.21383, 2026. URL https://arxiv.org/abs/2609.21383.

[19] Boyi Zeng, Shixiang Song, Siyuan Huang, et al. PonderLM: Pretraining language models to ponder in continuous space. In *The Fourteenth International Conference on Learning Representations*, pages 91874–91893, 2026. URL https://proceedings.iclr.cc/paper_files/paper/2026/hash/94572a66c6b0710c5263f15d8ef6b463-Abstract-Conference.html. arXiv:2505.20674.

[20] Gunn Kim. Dynamical phase selection controls compute scaling in looped transformers. arXiv preprint arXiv:2608.26556, 2026. URL https://arxiv.org/abs/2608.26556. Version 1, 27 August 2026.

[21] H. Sompolinsky, A. Crisanti, and H. J. Sommers. Chaos in random neural networks. *Physical Review Letters*, 61(3):259–262, 1988. doi: 10.1103/PhysRevLett.61.259.

[22] B. Doyon, B. Cessac, M. Quoy, and M. Samuelides. On bifurcations and chaos in random neural networks. *Acta Biotheoretica*, 42(2–3):215–225, 1994. doi: 10.1007/BF00709492.

[23] Mitchell J. Feigenbaum. Quantitative universality for a class of nonlinear transformations. *Journal of Statistical Physics*, 19(1):25–52, 1978. doi: 10.1007/BF01020332.

[24] Nicolás Vera Zúñiga. What iterated self-feeding probes of language models measure, and a test that separates the construction from the model. arXiv preprint arXiv:2608.10986, 2026. URL https://arxiv.org/abs/2608.10986.

[25] Ari Holtzman, Jan Buys, Li Du, Maxwell Forbes, and Yejin Choi. The curious case of neural text degeneration. In *The Eighth International Conference on Learning Representations*, 2020. URL https://openreview.net/forum?id=rygGQyrFvH. arXiv:1904.09751.

[26] Jin Xu, Xiaojiang Liu, Jianhao Yan, Deng Cai, Huayang Li, and Jian Li. Learning to break the loop: Analyzing and mitigating repetitions for neural text generation. In *Advances in Neural Information Processing Systems*, volume 35, pages 3082–3095, 2022. doi: 10.52202/068431-0223. URL https://proceedings.neurips.cc/paper_files/paper/2022/hash/148c0aeea1c5da82f4fa86a09d4190da-Abstract-Conference.html. arXiv:2206.02369.

[27] V. I. Oseledets. A multiplicative ergodic theorem. Lyapunov characteristic numbers for dynamical systems. *Transactions of the Moscow Mathematical Society*, 19:197–231, 1968. English translation of Trudy Moskovskogo Matematicheskogo Obshchestva 19 (1968) 179–210; Zbl 0236.93034.

[28] J.-P. Eckmann and D. Ruelle. Ergodic theory of chaos and strange attractors. *Reviews of Modern Physics*, 57(3):617–656, 1985. doi: 10.1103/RevModPhys.57.617.

[29] Mostafa Dehghani, Stephan Gouws, Oriol Vinyals, Jakob Uszkoreit, and Łukasz Kaiser. Universal Transformers. In *The Seventh International Conference on Learning Representations*, 2019. URL https://arxiv.org/abs/1807.03819.

[30] Angeliki Giannou, Shashank Rajput, Jy-yong Sohn, Kangwook Lee, Jason D. Lee, and Dimitris Papailiopoulos. Looped transformers as programmable computers. In *Proceedings of the 40th International Conference on Machine Learning*, volume 202 of *Proceedings of Machine Learning Research*, pages 11398–11442. PMLR, 2023. URL https://proceedings.mlr.press/v202/giannou23a.html.

[31] Nina Rimsky, Nick Gabrieli, Julian Schulz, Meg Tong, Evan Hubinger, and Alexander Turner. Steering Llama 2 via contrastive activation addition. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 15504–15522. Association for Computational Linguistics, 2024. doi: 10.18653/v1/2024.acl-long.828.

[32] Alexander Matt Turner, Lisa Thiergart, Gavin Leech, David Udell, Juan J. Vazquez, Ulisse Mini, and Monte MacDiarmid. Steering language models with activation engineering. arXiv preprint arXiv:2308.10248, 2023. URL https://arxiv.org/abs/2308.10248. Version 5, 10 October 2024; first posted 20 August 2023.

[33] Jinghao Zhang, Yuting Liu, Wenjie Wang, Qiang Liu, Shu Wu, Liang Wang, and Tat-Seng Chua. Personalized text generation with contrastive activation steering. In *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 7128–7141. Association for Computational Linguistics, 2025. doi: 10.18653/v1/2025.acl-long.353.

[34] Andy Zou, Long Phan, Sarah Chen, et al. Representation engineering: A top-down approach to AI transparency. arXiv preprint arXiv:2310.01405, 2023. URL https://arxiv.org/abs/2310.01405. Version 4, 3 March 2025; first posted 2 October 2023.

[35] Hubert Ramsauer, Bernhard Schäfl, Johannes Lehner, et al. Hopfield networks is all you need. In *The Ninth International Conference on Learning Representations*, 2021. URL https://openreview.net/forum?id=tL89RnzIiCd. arXiv:2008.02217.

[36] Martin J. Wainwright and Michael I. Jordan. Graphical models, exponential families, and variational inference. *Foundations and Trends in Machine Learning*, 1(1–2):1–305, 2008. doi: 10.1561/2200000001.

[37] Bolin Gao and Lacra Pavel. On the properties of the softmax function with application in game theory and reinforcement learning. arXiv preprint, 2017.

[38] J. F. C. Kingman. Subadditive ergodic theory. *The Annals of Probability*, 1(6):883–899, 1973. doi: 10.1214/aop/1176996798.

[39] David Singer. Stable orbits and bifurcation of maps of the interval. *SIAM Journal on Applied Mathematics*, 35(2):260–267, 1978. doi: 10.1137/0135020.

[40] Celso Grebogi, Edward Ott, and James A. Yorke. Crises, sudden changes in chaotic attractors, and transient chaos. *Physica D: Nonlinear Phenomena*, 7(1–3):181–200, 1983. doi: 10.1016/0167-2789(83)90126-4.

[41] Willy J. F. Govaerts. *Numerical Methods for Bifurcations of Dynamical Equilibria*. Society for Industrial and Applied Mathematics, 2000. doi: 10.1137/1.9780898719543.

[42] Yuri A. Kuznetsov. *Elements of Applied Bifurcation Theory*, volume 112 of *Applied Mathematical Sciences*. Springer, Cham, fourth edition, 2023. doi: 10.1007/978-3-031-22007-4.

[43] David Goldberg. What every computer scientist should know about floating-point arithmetic. *ACM Computing Surveys*, 23(1):5–48, 1991. doi: 10.1145/103162.103163.

[44] Horace He and Thinking Machines Lab. Defeating nondeterminism in LLM inference. *Thinking Machines Lab: Connectionism*, 2025. doi: 10.64434/tml.20250910. URL https://thinkingmachines.ai/blog/defeating-nondeterminism-in-llm-inference/.

[45] Jiayi Yuan, Hao Li, Xinheng Ding, Wenya Xie, Yu-Jhe Li, Wentian Zhao, Kun Wan, Jing Shi, Xia Hu, and Zirui Liu. Understanding and mitigating numerical sources of nondeterminism in LLM inference. In *Advances in Neural Information Processing Systems*, volume 38, pages 188045–188077, 2025. doi: 10.52202/085713-5653.

[46] Steven H. Strogatz and Robert M. Westervelt. Predicted power laws for delayed switching of charge-density waves. *Physical Review B*, 40(15):10501–10508, 1989. doi: 10.1103/PhysRevB.40.10501.

[47] Steven H. Strogatz. *Nonlinear Dynamics and Chaos: With Applications to Physics, Biology, Chemistry, and Engineering*. CRC Press, Boca Raton, second edition, 2018. doi: 10.1201/9780429492563.

[48] Yves Pomeau and Paul Manneville. Intermittent transition to turbulence in dissipative dynamical systems. *Communications in Mathematical Physics*, 74(2):189–197, 1980. doi: 10.1007/BF01197757.

[49] J. E. Hirsch, B. A. Huberman, and D. J. Scalapino. Theory of intermittency. *Physical Review A*, 25(1):519–532, 1982. doi: 10.1103/PhysRevA.25.519.

[50] Mitchell J. Feigenbaum. The universal metric properties of nonlinear transformations. *Journal of Statistical Physics*, 21(6):669–706, 1979. doi: 10.1007/BF01107909.

[51] P. Collet, J.-P. Eckmann, and H. Koch. Period doubling bifurcations for families of maps on $\mathbb{R}^n$. *Journal of Statistical Physics*, 25(1):1–14, 1981. doi: 10.1007/BF01008475.

[52] Christoforos A. Papasavvas, Yujiang Wang, Andrew J. Trevelyan, and Marcus Kaiser. Gain control through divisive inhibition prevents abrupt transition to chaos in a neural mass model. *Physical Review E*, 92(3):032723, 2015. doi: 10.1103/PhysRevE.92.032723.

[53] Yilun Liu, Yi Zhang, Ganyu Wu, Sikuan Yan, Mengyue Wang, Alois Knoll, Volker Tresp, and Yunpu Ma. Learning chaos without seeing chaos: Extrapolation of global dynamics in autoregressive transformers. arXiv preprint arXiv:2609.38814, 2026. URL https://arxiv.org/abs/2609.38814v1. Version 1, 30 September 2026.

[54] Renato Vitolo, Paul Glendinning, and Jason A. C. Gallas. Global structure of periodicity hubs in Lyapunov phase diagrams of dissipative flows. *Physical Review E*, 84(1):016216, 2011. doi: 10.1103/PhysRevE.84.016216.

[55] Timothy D. Jones. Topological origins of a bi-parameter periodicity hub for the Rössler attractor. arXiv preprint arXiv:1201.4343, 2012. URL https://arxiv.org/abs/1201.4343.

[56] Jason A. C. Gallas. Dissecting shrimps: results for some one-dimensional physical models. *Physica A*, 202(1–2):196–223, 1994. doi: 10.1016/0378-4371(94)90174-0.

[57] Wilson Façanha, Bart Oldeman, and Leon Glass. Bifurcation structures in two-dimensional maps: The endoskeletons of shrimps. *Physics Letters A*, 377(18):1264–1268, 2013. doi: 10.1016/j.physleta.2013.03.025.

[58] S. Grossmann and S. Thomae. Invariant distributions and stationary correlation functions of one-dimensional discrete processes. *Zeitschrift für Naturforschung A*, 32(12):1353–1363, 1977. doi: 10.1515/zna-1977-1204.

[59] Edward N. Lorenz. Noisy periodicity and reverse bifurcation. *Annals of the New York Academy of Sciences*, 357(1):282–291, 1980. doi: 10.1111/j.1749-6632.1980.tb29693.x.

[60] Christian Mira. *Chaotic Dynamics: From the One-Dimensional Endomorphism to the Two-Dimensional Diffeomorphism*. World Scientific, Singapore, 1987. doi: 10.1142/0413.

[61] J. P. Carcassès, C. Mira, M. Bosch, C. Simó, and J. C. Tatjer. "Crossroad area–spring area" transition (I): parameter plane representation. *International Journal of Bifurcation and Chaos*, 1(1):183–196, 1991. doi: 10.1142/S0218127491000117.

[62] C. Mira, J. P. Carcassès, M. Bosch, C. Simó, and J. C. Tatjer. "Crossroad area–spring area" transition (II): foliated parametric representation. *International Journal of Bifurcation and Chaos*, 1(2):339–348, 1991. doi: 10.1142/S0218127491000269.

[63] Christian Mira, Laura Gardini, Alexandra Barugola, and Jean-Claude Cathala. *Chaotic Dynamics in Two-Dimensional Noninvertible Maps*, volume 20 of *World Scientific Series on Nonlinear Science, Series A*. World Scientific, Singapore, 1996. doi: 10.1142/2252.

[64] M. Hénon. A two-dimensional mapping with a strange attractor. *Communications in Mathematical Physics*, 50(1):69–77, 1976. doi: 10.1007/BF01608556.

[65] N. Metropolis, M. L. Stein, and P. R. Stein. On finite limit sets for transformations on the unit interval. *Journal of Combinatorial Theory, Series A*, 15(1):25–44, 1973. doi: 10.1016/0097-3165(73)90033-2.

[66] John Milnor and William Thurston. On iterated maps of the interval. In *Dynamical Systems*, Lecture Notes in Mathematics, pages 465–563. Springer, Berlin, Heidelberg, 1988. doi: 10.1007/BFb0082847.

[67] Karl Cobbe, Vineet Kosaraju, Mohammad Bavarian, et al. Training verifiers to solve math word problems. arXiv preprint arXiv:2110.14168, 2021. URL https://arxiv.org/abs/2110.14168.

[68] Boyuan Wang, Chengyao Yu, Jiaxi Ren, Hongxin Wei, Bingyi Jing, and Yuxin Tao. Scheduling recursive reasoning in looped transformers. arXiv preprint arXiv:2609.36653, 2026. URL https://arxiv.org/abs/2609.36653. Submitted 29 September 2026.

[69] Peter Clark, Isaac Cowhey, Oren Etzioni, Tushar Khot, Ashish Sabharwal, Carissa Schoenick, and Oyvind Tafjord. Think you have solved question answering? Try ARC, the AI2 Reasoning Challenge. arXiv preprint, 2018. URL https://arxiv.org/abs/1803.05457.

[70] Anthropic. System card: Claude Opus 4 & Claude Sonnet 4. System card, Anthropic, 2025. URL https://www-cdn.anthropic.com/6d8a8055020700718b0c49369f60816ba2a7c285/Claude%204%20System%20Card.pdf. May 2025; revision 2 September 2025; sections 5.5.1–5.5.2.

[71] J. Almeida, D. Peralta-Salas, and M. Romera. Can two chaotic systems give rise to order? *Physica D: Nonlinear Phenomena*, 200(1–2):124–132, 2005. doi: 10.1016/j.physd.2004.10.003.

[72] Hirokazu Fujisaka and Tomoji Yamada. Stability theory of synchronized motion in coupled-oscillator systems. *Progress of Theoretical Physics*, 69(1):32–47, 1983. doi: 10.1143/PTP.69.32.

[73] Louis M. Pecora and Thomas L. Carroll. Synchronization in chaotic systems. *Physical Review Letters*, 64(8):821–824, 1990. doi: 10.1103/PhysRevLett.64.821.

[74] N. Platt, E. A. Spiegel, and C. Tresser. On-off intermittency: A mechanism for bursting. *Physical Review Letters*, 70(3):279–282, 1993. doi: 10.1103/PhysRevLett.70.279.

[75] J. F. Heagy, N. Platt, and S. M. Hammel. Characterization of on-off intermittency. *Physical Review E*, 49:1140–1150, 1994. doi: 10.1103/PhysRevE.49.1140.

[76] Peter Ashwin, Jorge Buescu, and Ian Stewart. Bubbling of attractors and synchronisation of chaotic oscillators. *Physics Letters A*, 193(2):126–139, 1994. doi: 10.1016/0375-9601(94)90947-4.

[77] Ruedi Stoop, Philipp Benner, and Yoko Uwate. Real-world existence and origins of the spiral organization of shrimp-shaped domains. *Physical Review Letters*, 105(7):074102, 2010. doi: 10.1103/PhysRevLett.105.074102.

[78] David Sussillo and Omri Barak. Opening the black box: Low-dimensional dynamics in high-dimensional recurrent neural networks. *Neural Computation*, 25(3):626–649, 2013. doi: 10.1162/NECO_a_00409.

[79] Niru Maheswaranathan, Alex Williams, Matthew Golub, Surya Ganguli, and David Sussillo. Reverse engineering recurrent networks for sentiment classification reveals line attractor dynamics. In *Advances in Neural Information Processing Systems*, volume 32, pages 15696–15705, 2019. URL https://proceedings.neurips.cc/paper_files/paper/2019/hash/d921c3c762b1522c475ac8fc0811bb0f-Abstract.html. arXiv:1906.10720.

[80] Nick Cammarata. Neural networks are already clean. Goodfire essay, https://already-clean.goodfire.com/, n.d. Undated web essay; accessed 15 October 2026.

[81] Tomek Korbak, Mikita Balesni, Elizabeth Barnes, et al. Chain of Thought Monitorability: A new and fragile opportunity for AI safety, 2025. URL https://arxiv.org/abs/2507.11473.

[82] Rui-Jie Zhu, Zixuan Wang, Kai Hua, et al. Scaling latent reasoning via looped language models. arXiv preprint, 2025. URL https://arxiv.org/abs/2510.25741.

[83] Sangmin Bae, Yujin Kim, Reza Bayat, et al. Mixture-of-Recursions: Learning dynamic recursive depths for adaptive token-level computation. In *Advances in Neural Information Processing Systems*, volume 38, pages 107088–107133, 2025. doi: 10.52202/085713-3229. URL https://arxiv.org/abs/2507.10524.

[84] Chris G. Langton. Computation at the edge of chaos: Phase transitions and emergent computation. *Physica D: Nonlinear Phenomena*, 42(1–3):12–37, 1990. doi: 10.1016/0167-2789(90)90064-V.

[85] Nils Bertschinger and Thomas Natschläger. Real-time computation at the edge of chaos in recurrent neural networks. *Neural Computation*, 16(7):1413–1436, 2004. doi: 10.1162/089976604323057443.

[86] Ben Poole, Subhaneil Lahiri, Maithra Raghu, Jascha Sohl-Dickstein, and Surya Ganguli. Exponential expressivity in deep neural networks through transient chaos. In *Advances in Neural Information Processing Systems*, volume 29, 2016. URL https://proceedings.neurips.cc/paper_files/paper/2016/hash/148510031349642de5ca0c544f31b2ef-Abstract.html. arXiv:1606.05340.

[87] Samuel S. Schoenholz, Justin Gilmer, Surya Ganguli, and Jascha Sohl-Dickstein. Deep information propagation. In *The Fifth International Conference on Learning Representations*, 2017. URL https://openreview.net/forum?id=H1W1UN9gg. arXiv:1611.01232.

[88] Ilia Shumailov, Zakhar Shumaylov, Yiren Zhao, Nicolas Papernot, Ross Anderson, and Yarin Gal. AI models collapse when trained on recursively generated data. *Nature*, 631(8022): 755–759, 2024. doi: 10.1038/s41586-024-07566-y.

[89] António H. Ribeiro, Koen Tiels, Luis A. Aguirre, and Thomas Schön. Beyond exploding and vanishing gradients: analysing RNN training using attractors and smoothness. In *Proceedings of the Twenty Third International Conference on Artificial Intelligence and Statistics*, volume 108 of *Proceedings of Machine Learning Research*, pages 2370–2380. PMLR, 2020. URL https://proceedings.mlr.press/v108/ribeiro20a.html.

[90] Hayden Prairie, Zachary Novack, Taylor Berg-Kirkpatrick, and Daniel Y. Fu. Parcae: Scaling laws for stable looped language models. arXiv preprint arXiv:2604.12946, 2026. URL https://arxiv.org/abs/2604.12946.

[91] Matthias M. M. Buehlmaier. LayerNorm as implicit gain control in looped transformers. arXiv preprint arXiv:2607.10681, 2026. URL https://arxiv.org/abs/2607.10681. Version 1, 12 July 2026.

[92] Asher Labovich. Stability and generalization in looped transformers. arXiv preprint arXiv:2604.15259, 2026. URL https://arxiv.org/abs/2604.15259. Version 2, 22 April 2026.

[93] Sajad Movahedi, Vera Milovanović, Shlomo Libo Feigin, Alexander Theus, Thomas Hofmann, Valentina Boeva, T. Konstantin Rusch, and Antonio Orvieto. Fixed-point reasoners: Stable and adaptive deep looped transformers. arXiv preprint arXiv:2606.18206, 2026. URL https://arxiv.org/abs/2606.18206. Version 1, 16 June 2026.

[94] Hugh Blayney, Álvaro Arroyo, Johan Obando-Ceron, et al. A mechanistic analysis of looped reasoning language models. arXiv preprint arXiv:2604.11791, 2026. URL https://arxiv.org/abs/2604.11791.

[95] Ivan Viakhirev, Kirill Borodin, Amirah Almutairi, et al. Think shallow, solve deep: Controlling recurrent dynamics for reliable test-time depth. arXiv preprint arXiv:2608.18222, 2026. URL https://arxiv.org/abs/2608.18222.

[96] Sumin Park and T. Konstantin Rusch. Looped reasoning finishes earlier than you think. arXiv preprint arXiv:2610.18174, 2026. URL https://arxiv.org/abs/2610.18174.

[97] Qucheng Gao, Zuyi Yang, and Xiao Chen. Nonequilibrium phases of repulsive self-attention: Chaos, attention condensation, and emergent locality. arXiv preprint arXiv:2609.28448, 2026. URL https://arxiv.org/abs/2609.28448.

[98] Junhong Wu, Jinliang Lu, Zixuan Ren, Gangqiang Hu, Zhi Wu, Dai Dai, and Hua Wu. LLMs are single-threaded reasoners: Demystifying the working mechanism of Soft Thinking. In *The Fourteenth International Conference on Learning Representations*, pages 4533–4548, 2026. URL https://proceedings.iclr.cc/paper_files/paper/2026/hash/0895de150660b6c2aef9b0f098cb1dcd-Abstract-Conference.html. arXiv:2508.03440.

[99] Ali Backour. The dynamics of continuous mixture collapse in language models. arXiv preprint arXiv:2609.02049, 2026. URL https://arxiv.org/abs/2609.02049.

[100] Michael Rizvi-Martel, Guillaume Rabusseau, and Marius Mosbach. The illusion of superposition? A principled analysis of latent thinking in language models. arXiv preprint arXiv:2604.06374, 2026. URL https://arxiv.org/abs/2604.06374.

[101] Jie Yu, Yuxi Sun, Zhaoxu Li, Chunxiao Liu, and Xudong Jiang. CoTS: Competitive token selection for latent reasoning in large language models. arXiv preprint arXiv:2610.20642, 2026. URL https://arxiv.org/abs/2610.20642.

[102] Xuan Li, Yining Wang, Yuchen Liu, Guanjun Liu, Delai Qiu, Shengping Liu, Jiaen Liang, Wei Huang, Jun Yu, and Junnan Zhu. LaTER: Efficient test-time reasoning via latent exploration and explicit verification. arXiv preprint arXiv:2605.07315, 2026. URL https://arxiv.org/abs/2605.07315.

[103] Nikita Koriagin, Yaroslav Aksenov, George Bredis, Gleb Gerasimov, Nikita Balagansky, and Daniil Gavrilov. A model with no head and many thoughts. arXiv preprint arXiv:2608.31069; Findings of EMNLP 2026, 2026. URL https://arxiv.org/abs/2608.31069.

[104] Fatih Dinc, Ege Cirakman, Bariscan Kurtkaya, Mert Yuksekgonul, Yiqi Jiang, Mark J. Schnitzer, and Hidenori Tanaka. Ghost mechanism: An analytical model of abrupt learning in recurrent networks. *Physical Review X*, 16(2):021058, 2026. doi: 10.1103/mjcl-lb4x.

[105] Demian Battaglia, Nicolas Brunel, and David Hansel. Temporal decorrelation of collective oscillations in neural networks with local inhibition and long-range excitation. *Physical Review Letters*, 99(23):238106, 2007. doi: 10.1103/PhysRevLett.99.238106.

[106] Jason Z. Kim, Zhixin Lu, Erfan Nozari, George J. Pappas, and Danielle S. Bassett. Teaching recurrent neural networks to infer global temporal structure from local examples. *Nature Machine Intelligence*, 3(4):316–323, 2021. doi: 10.1038/s42256-021-00321-2.

[107] Dayal Singh Kalra, Tianyu He, and Maissam Barkeshli. Universal sharpness dynamics in neural network training: Fixed point analysis, edge of stability, and route to chaos. In *The Thirteenth International Conference on Learning Representations*, pages 55966–56000, 2025. URL https://proceedings.iclr.cc/paper_files/paper/2025/hash/8c8cd1b78cdae751265c88efc136e5bd-Abstract-Conference.html.

[108] R. L. Marichal and J. D. Piñeiro. Analysis of multiple quasi-periodic orbits in recurrent neural networks. *Neurocomputing*, 162:85–95, 2015. doi: 10.1016/j.neucom.2015.04.001.

[109] Florian Gomez, Ralph L. Stoop, and Ruedi Stoop. Universal dynamical properties preclude standard clustering in a large class of biochemical data. *Bioinformatics*, 30(17):2486–2493, 2014. doi: 10.1093/bioinformatics/btu332.

[110] Rafael V. Stenzinger, Vinícius Luz Oliveira, and M. H. R. Tragtenberg. Shrimp hubs in the Hindmarsh–Rose model. *Chaos: An Interdisciplinary Journal of Nonlinear Science*, 35(2): 023148, 2025. doi: 10.1063/5.0239268.

[111] Luiz F. B. Caixeta, Matheus H. P. Gonçalves, M. H. R. Tragtenberg, and Mauricio Girardi-Schappo. Devil's staircase inside shrimp-shaped regions reveals periodicity of plateau spikes and bursts. *Chaos: An Interdisciplinary Journal of Nonlinear Science*, 35(3):033122, 2025. doi: 10.1063/5.0250342.

[112] Yuri A. Kuznetsov and Hil G. E. Meijer. *Numerical Bifurcation Analysis of Maps*. Cambridge University Press, Cambridge, 2019. doi: 10.1017/9781108585804.

[113] Giancarlo Benettin, Luigi Galgani, Antonio Giorgilli, and Jean-Marie Strelcyn. Lyapunov characteristic exponents for smooth dynamical systems and for Hamiltonian systems; a method for computing all of them. Part 1: Theory. *Meccanica*, 15(1):9–20, 1980. doi: 10.1007/BF02128236.

[114] Giancarlo Benettin, Luigi Galgani, Antonio Giorgilli, and Jean-Marie Strelcyn. Lyapunov characteristic exponents for smooth dynamical systems and for Hamiltonian systems; a method for computing all of them. Part 2: Numerical application. *Meccanica*, 15(1):21–30, 1980. doi: 10.1007/BF02128237.

[115] John Milnor. On the concept of attractor. *Communications in Mathematical Physics*, 99(2): 177–195, 1985. doi: 10.1007/BF01212280.

[116] Kenji Matsumoto and Ichiro Tsuda. Noise-induced order. *Journal of Statistical Physics*, 31 (1):87–106, 1983. doi: 10.1007/BF01010923.

[117] James P. Crutchfield, J. Doyne Farmer, and Bernardo A. Huberman. Fluctuations and simple chaotic dynamics. *Physics Reports*, 92(2):45–82, 1982. doi: 10.1016/0370-1573(82)90089-8.

[118] Jonathan Kadmon and Haim Sompolinsky. Transition to chaos in random neuronal networks. *Physical Review X*, 5(4):041030, 2015. doi: 10.1103/PhysRevX.5.041030.

[119] Kanaka Rajan, L. F. Abbott, and Haim Sompolinsky. Stimulus-dependent suppression of chaos in recurrent neural networks. *Physical Review E*, 82(1):011903, 2010. doi: 10.1103/PhysRevE.82.011903.

[120] Cristian Bonatto and Jason A. C. Gallas. Periodicity hub and nested spirals in the phase diagram of a simple resistive circuit. *Physical Review Letters*, 101(5):054101, 2008. doi: 10.1103/PhysRevLett.101.054101.

[121] Yihe Dong, Jean-Baptiste Cordonnier, and Andreas Loukas. Attention is not all you need: Pure attention loses rank doubly exponentially with depth. In *Proceedings of the 38th International Conference on Machine Learning*, volume 139 of *Proceedings of Machine Learning Research*, pages 2793–2803. PMLR, 2021. URL https://proceedings.mlr.press/v139/dong21a.html. arXiv:2103.03404.

[122] Borjan Geshkovski, Cyril Letrouit, Yury Polyanskiy, and Philippe Rigollet. The emergence of clusters in self-attention dynamics. In *Advances in Neural Information Processing Systems*, volume 36, pages 57026–57037, 2023. doi: 10.52202/075280-2493. URL https://proceedings.neurips.cc/paper_files/paper/2023/hash/b2b3e1d9840eba17ad9bbf073e009afe-Abstract-Conference.html. arXiv:2305.05465.

[123] James L. Kaplan and James A. Yorke. Chaotic behavior of multidimensional difference equations. In *Functional Differential Equations and Approximation of Fixed Points*, Lecture Notes in Mathematics, pages 204–227. Springer, Berlin, Heidelberg, 1979. doi: 10.1007/BFb0064319.

[124] Frank Pasemann. Complex dynamics and the structure of small neural networks. *Network: Computation in Neural Systems*, 13(2):195–216, 2002. doi: 10.1080/net.13.2.195.216.

[125] Zihao Fu, Wai Lam, Anthony Man-Cho So, and Bei Shi. A theoretical analysis of the repetition problem in text generation. *Proceedings of the AAAI Conference on Artificial Intelligence*, 35 (14):12848–12856, 2021. doi: 10.1609/aaai.v35i14.17520. arXiv:2012.14660.

[126] Catherine Olsson, Nelson Elhage, Neel Nanda, et al. In-context learning and induction heads. Transformer Circuits Thread, 2022. URL https://transformer-circuits.pub/2022/in-context-learning-and-induction-heads/index.html. arXiv:2209.11895.

[127] Team OLMo, Pete Walsh, Luca Soldaini, Dirk Groeneveld, et al. 2 OLMo 2 furious. arXiv preprint arXiv:2501.00656, 2024. URL https://arxiv.org/abs/2501.00656. Shorter version in the Second Conference on Language Modeling (2025).

[128] Aaron Grattafiori, Abhimanyu Dubey, Abhinav Jauhri, et al. The Llama 3 herd of models. arXiv preprint arXiv:2407.21783, 2024. URL https://arxiv.org/abs/2407.21783.

[129] Goodfire. Llama-3.1-8B-Instruct-SAE-l19. Hugging Face, https://huggingface.co/Goodfire/Llama-3.1-8B-Instruct-SAE-l19, 2025. Sparse autoencoder on the residual stream after layer 19; revision f6775a22.

[130] Seonglae Cho, Harryn Oh, Donghyun Lee, Luis Rodrigues Vieira, Andrew Bermingham, and Ziad El Sayed. FaithfulSAE: Towards capturing faithful features with sparse autoencoders without external datasets dependency. In *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics (Volume 4: Student Research Workshop)*, pages 297–314. Association for Computational Linguistics, 2025. doi: 10.18653/v1/2025.acl-srw.20. arXiv:2506.17673.

[131] Gonçalo Paulo and Nora Belrose. Sparse autoencoders trained on the same data learn different features. In *The Fourteenth International Conference on Learning Representations*, 2026. URL https://proceedings.iclr.cc/paper_files/paper/2026/hash/3c1fe56b043848b211030c202764c6a7-Abstract-Conference.html. arXiv:2501.16615.

[132] Ying-Cheng Lai and Tamás Tél. *Transient Chaos: Complex Dynamics on Finite Time Scales*, volume 173 of *Applied Mathematical Sciences*. Springer, New York, NY, 2011. doi: 10.1007/978-1-4419-6987-3.

[133] Fredrik Johansson. Arb: Efficient arbitrary-precision midpoint-radius interval arithmetic. *IEEE Transactions on Computers*, 66(8):1281–1292, 2017. doi: 10.1109/TC.2017.2690633.

[134] R. Krawczyk. Newton-Algorithmen zur Bestimmung von Nullstellen mit Fehlerschranken. *Computing*, 4(3):187–201, 1969. doi: 10.1007/BF02234767.

[135] Ramon E. Moore, R. Baker Kearfott, and Michael J. Cloud. *Introduction to Interval Analysis*. Society for Industrial and Applied Mathematics, Philadelphia, PA, 2009. doi: 10.1137/1.9780898717716.

[136] Siegfried M. Rump. Verification methods: Rigorous results using floating-point arithmetic. *Acta Numerica*, 19:287–449, 2010. doi: 10.1017/S096249291000005X.

# A Related work in detail

Language-model generation has been studied as a dynamical system at several levels, and the closest studies differ from ours in what they compute. Lyapunov-like quantities have been used to measure sensitivity to small perturbations in reasoning traces [5, 6] and in token rings resampled by a model's own conditionals, with a test that separates the construction from the model [24], but these studies measure chaos-like sensitivity in generation without computing orbits or bifurcations. Output statistics change abruptly with sampling temperature, and several studies analyze the changes as phase transitions or criticality [7–10]. These analyses concern output statistics; they are not bifurcation analyses of a defined map. Closest to ours in subject, a study of eleven models sorts sampled continuations into classes from frozen and periodic to intermittent and noisy across temperature, fits a noisy effective map to one hidden-state coordinate that predicts repetition, and steers along it [11]; that map is fitted to sampled trajectories, and no orbits, multipliers or bifurcation curves of the model's own map are computed. Repetition loops are a known failure of decoding [25, 26], successive paraphrasing converges to attractor cycles [12], and multi-turn conversations between models settle into attractor states [13]. These attractors are behavioral: they are observed in generated text rather than computed as invariant sets of a defined map. Feeding a model its own output during training degrades it over generations [88]; we study the inference-time loop of a model with fixed weights. The attractors of recurrent networks have been related to the difficulty of training them [89], and fixed points with their linearizations have long been used to reverse-engineer trained recurrent networks [78, 79]. Equilibrium, looped and recurrent-depth models iterate a block to a fixed point or for many steps, and their stability has been analyzed through Jacobians and fixed points [3, 14–17, 82, 90–93], and recent analyses of looped reasoners follow their internal dynamics, their settling, marginal or drifting regimes and slowly decaying oscillatory modes [94–96]; these studies examine fixed-point stability, finite-depth dynamics and nonstationary regimes. Here we continue full-state periodic branches and classify their bifurcations in specified frozen-model feedback maps. A minimal recurrent self-attention with a repulsive value map becomes chaotic [97], but it is a constructed model, not a trained one. A separate line predicts the answers of looped models from the geometry of score margins along completed finite-depth trajectories [18], without fixed points or Jacobians. The closest methodological precedent is a derivative-based fold analysis of a small task-trained looped transformer, whose passage and spectral-gap predictions are unfitted [20]. That model was trained for a task, whereas ours is a released pretrained language model, and our analysis also differs in its objects: the fold of a primitive periodic orbit, the full-channel passage of a two-step map, and the accumulation law of the windows, whose prefactor is set by the global reinjection. Expected-embedding feedback itself is used in training [19] and, training-free, in pretrained models [1, 98], next to continuous latent reasoning [2]; Backour shows that the softmax readout and autoregressive feedback form a dynamical system that either amplifies small differences until one component of a mixture dominates or contracts different mixtures together, with pretrained rollouts mostly on the amplifying side [99]; that analysis concerns the fate of mixtures, while ours computes the invariant sets, bifurcations and normal forms of the full released map and their consequences for reproducibility, and whether they exploit the superposition the mixtures could carry has been questioned [100]. Newer methods vary what is fed back. CoTS keeps the sampled token and mixes in the expected embedding in proportion to the competition between the two leading candidates [101], the near-tie that makes our loop's readout expand (Section 3); since at least half of each input is the discrete token, our orbits do not carry over to it directly. LaTER feeds back a linear projection of the final hidden state [102], and a trained projector lets a model roll out in a learned embedding space without its output head [103]. For such hidden-state loops the derivative of Section 3 takes a different form, without the readout covariance, while the tools

used here (orbits, multipliers, continuation and normal forms) apply unchanged. Fixing the prefix and the position turns that feedback into the autonomous map we analyze.

In neural systems more broadly, saddle-node ghosts produce quantitative delays in task-trained recurrent networks [104]. Finite-order Feigenbaum ratios have been measured in neural rate and mass models [52, 105] and, through period 128, in a transformer trained on logistic-map trajectories [53]. Learned networks reproduce period-doubling routes [106], and so does gradient descent itself [107]. Normal forms and continuation have been applied to recurrent neural maps, including their quasi-periodic orbits [108], and shrimp-shaped windows and periodicity staircases appear in neuron models [109–111]. Our second control parameter comes from activation steering along contrastive directions [33, 34]. The dynamical-systems tools are standard: numerical continuation and normal forms [41, 42], for maps in particular [112], type-I intermittency [48], shrimps and hubs [4, 54, 55, 57], and period-doubling universality [23].

# B Methods

**Precision.** Every result on the soft-token map labeled float64 is computed in float64 arithmetic throughout: embeddings, activations, attention keys and values (the prefix cache), normalizations (patched, since the library computes RMS normalization in float32 by default), rotary tables, logits, the softmax and the fed-back token. The released checkpoints store their weights in bfloat16, and a bfloat16 number is exactly a float64 number, so converting the weights is exact. For large models the decoder's linear weights stay in their stored bfloat16 and are converted to float64 at each use, which gives the same map as converting them once (bitwise on Qwen2.5-0.5B). The designated float64 computations use the patched normalization and rotary paths; some diagnostic traces, such as the step records of the gain split, are serialized in float32, as recorded in their artifacts. The dense checkpoints store bfloat16 weights (checked against their safetensors metadata), and the mixture of experts stores some tensors in float32, which we restore exactly; float64 does not make the weights more precise than stored. One exception concerns the 70B-class models, which are spread over two GPUs. In the two-GPU runs made before the fix described here, the final RMS normalization was computed in float32: the hooks that move tensors between the GPUs keep a layer's original code, so our float64 version of that layer was bypassed. This makes the computed map rough at about $10^{-8}$ of the state (its fixed points wander by $10^{-8}$, against $10^{-15}$ on one GPU) and can matter for exponents measured with perturbations of $10^{-6}$ and below. The affected runs are the 70B-class sweeps and their plateau tests, the first Qwen2.5-72B prompt test, the 70B steering maps and the first zoom, the gain splits of the 70B-class models, and the start-state test, which spread all fourteen models over two GPUs; Appendix I says which results we recomputed. Derivatives are automatic-differentiation tangents of this float64 computation: free of finite-difference truncation, but computed in floating point. We call a result exact only when it comes from interval or rational arithmetic, as in the proofs of Appendix L.

**Statistical units.** The cells of a parameter map are evaluations of one deterministic function at neighboring parameters, not independent experiments, and neighboring cells are strongly correlated. Their counts and shares therefore describe the area of a region on a chosen grid, not a prevalence over models or prompts. Comparisons between chaotic and periodic cells use temperature rows as units: intervals come from bootstraps over rows, and permutation $p$-values within rows are descriptive. Where a random sample of cells is drawn, its seed and sampling frame are recorded with the run. In tests on problems the problem is the unit, paired across conditions; where problems share a batch, intervals are clustered by batch, and McNemar tests, which treat problems as independent,

are reported alongside them. Batch-level randomization tests, which flip the sign of each batch's summed paired difference, give the same conclusions for every contrast of the Soft Thinking and reasoning-model tests (`tools/cluster_tests.py`, `docs/cluster/`). Soft Thinking's contrasts with replay, greedy decoding and 16 soft steps all have batch-level $p \leq 5 \times 10^{-6}$, the resolution of 200 000 draws, over 77 batches. In DeepSeek-R1-Distill-Llama-8B, soft thinking changes 7.4 points more answers than plain reasoning (batch level $p = 0.033$, against 0.029 for McNemar's test, over 16 batches) and answers correctly 4.7 points less often (batch level $p = 0.063$, against 0.096). Every interval names its resampling unit. A null result is stated together with the size of effect its interval excludes; effects smaller than that remain compatible with the data.

**Independent implementations.** Where an independent implementation reproduced a result, a second implementation of the map (and, where stated, of the solver or the normal-form computation), written separately by the second coding agent from the model's published architecture (`codex/crosscheck` in the repository), recomputed it. The two implementations share the stored weights, the tokenizer and the specification of the map, not code; hardware and library versions were not varied on purpose. The second implementation, a manual float64 forward pass of the stored checkpoint that uses neither our tools nor the Transformers library, also reproduces the chaos: with the scans' protocol (fixed start, 300 transient steps, twin offset $10^{-6}$), its 300-step exponents at two chaotic cells of Figure 11, $(0.065201, -0.155998)$ and $(0.075475, -0.133454)$, are 0.098 and 0.354, against 0.113 and 0.359 in the scan (0.106 and 0.332 over 1000 steps), and at the certified period-8 orbit it gives $-0.564$ per step over 1000 steps ($-0.579$ over 300), the value $\ln(0.0110)/8$ that the orbit's leading multiplier predicts (`tools/independent_chaos_check.py`).

**Phase maps.** Each cell of a phase map is one parameter pair. Unless stated otherwise, we discard 300 transient steps and measure over the next 300. The largest Lyapunov exponent comes from a twin trajectory at offset $10^{-6}$ that is renormalized to that offset after every step, Benettin's method with a finite-difference tangent [113, 114]; it estimates over a finite horizon the exponent that the multiplicative ergodic theorem defines as a limit [27]. At the 448 random cells of the horizon check (Appendix K), an automatic-differentiation tangent vector carried by forward-mode differentiation reproduces the twin exponents at offsets $10^{-6}$ and $10^{-9}$ within 0.0041 (median 0.0004), with the same 178 chaotic labels, and at six chaotic cells the four leading exponents from QR iteration include exactly one positive one (0.06 to 0.42; the next is $-0.64$ to $-1.10$). The period is the smallest $q \leq 32$ (48 in the later zooms) for which the last state returns to within $10^{-8} \max(1, \|x\|)$ of the state $q$ steps earlier ($10^{-5}$ to $10^{-4}$ in float32 maps), and the attractor is identified by its leading-token loop, up to rotation. We call a cell chaotic when this finite-horizon exponent exceeds $10^{-3}$ and no period is found; the label is a finite-horizon diagnostic, not a proof of chaos. The threshold matters little: raising it to $5 \times 10^{-3}$ lowers the chaotic share of the map of Figure 1 from 30.1 to 29.8 %. We call what the trajectory from a cell's fixed start settles on the cell's attractor. The label is operational: it does not show that the set attracts initial conditions of positive measure, as Milnor's definition requires [115], and a long chaotic transient can carry a chaotic label [40]. A loop is at the edge of chaos when $|\lambda| \leq 0.1$. Maps draw the chaotic cells by this criterion: in color by their exponent where a map shows the exponent, in black where it shows periods or attractor text. Two figures color every cell whose exponent exceeds $10^{-3}$, also where a period is detected, as their captions state: the prompt maps (Figure 84) and the followed domain of the period-5 window (Figure 39). Panels whose legend reads 'Lyapunov $> 0.005$' follow an older convention that marks every cell whose exponent exceeds 0.005, whether or not a period was found; on the five maps we redrew with the criterion, the two differ in at most 0.56 % of a map's cells. A $256^2$ map takes about 100 minutes

on one H100 GPU in float64. Every cell starts from the same state, so where attractors coexist, a map shows the one whose basin contains that state. Labels are text, not dynamical identities: one continuous orbit changes its label where two tokens tie for the maximum. We therefore call two labeled regions different attractors only when the contraction rate jumps between them or when float64 orbits of both exist at one parameter value.

**Resolving the network factor through the stack.** Hooks read, at the soft token's position, the residual stream entering each block, the outputs of its attention and MLP sublayers, and the final hidden state before and after the final normalization. They do so for the base row and for a twin at relative offset $10^{-7}$ along the evolving tangent direction. The split of the network factor into $A_L - N_L$ and the final normalization is exact.

In the pre-normalization architectures of Qwen2.5, Qwen3.5, Llama-3 and OLMoE, the residual stream adds the sublayer outputs, $\delta h_L = \delta x + \sum_s \delta o_s$, and this sum closes to within $4 \times 10^{-7}$ relative in every model and temperature. OLMo-2 normalizes each sublayer's output before adding it, so the sum does not close there (relative errors of 0.9 to 150). For OLMo-2 we therefore use only quantities that do not depend on it: the factor itself, $A_l$, $N_l$ and the knockouts.

A knockout holds one sublayer's output at the soft token at its value in the base row while the input carries the twin's change, which blocks the change's path through that sublayer. The knockout rows reproduce the plain twin's network factor within $5.1 \times 10^{-7}$.

For the mixtures of experts, a third row receives the twin's input but uses the base row's experts in every layer, weighted by its own router probabilities, renormalized over them where the router renormalizes its top-8 weights (Qwen3.5) and not where it does not (OLMoE). Each step also records whether the twin's set of experts differs from the base row's in any layer, and the base row's smallest gap between the eighth and ninth largest router logits over all layers. Qwen3.5's linear-attention layers carry recurrent states, which are restored after every step, as in the soft-token loop.

**False chaos and real chaos.** A twin exponent measures how fast the difference between two trajectories grows, so anything that adds a difference of its own can imitate growth. Suppose that both rows receive independent noise of relative size $\sigma$ at every step, from rounding or from the float32 normalization described above, so that their difference receives noise of root-mean-square size $\sqrt{2}\,\sigma$. We use a simplified model: a difference survives along one fixed leading direction, growing by a constant factor $e^{\lambda}$ per step, while the other directions contract within a step; the noise component along the leading direction is neglected, and the norm of the rest is replaced by its root-mean-square value. Let $c_t$ be the cosine of the angle between the renormalized twin offset and the leading direction, and $r = \sqrt{2}\,\sigma/\varepsilon$ the noise relative to the offset $\varepsilon$. Without these simplifications one step gives $c_{t+1}^2 = (e^{\lambda}c_t + \eta_{\parallel})^2/[(e^{\lambda}c_t + \eta_{\parallel})^2 + \|\eta_{\perp}\|^2]$, where $\eta_{\parallel}$ and $\eta_{\perp}$ are the components of the difference noise, in units of $\varepsilon$, along and across the leading direction; the model sets $\eta_{\parallel} = 0$ and $\|\eta_{\perp}\| = r$, so that $c_{t+1}^2 = e^{2\lambda}c_t^2/(e^{2\lambda}c_t^2 + r^2)$. While $r < e^{\lambda}$, the angle settles at $c^2 = 1 - r^2e^{-2\lambda}$, and the twin grows by $e^{\lambda}$ per step. Otherwise $c \to 0$, and the twin grows by $r$ per step, whatever the dynamics. In the model the twin therefore measures $\max\{\lambda, \log r\}$, and for the network we use this as an approximation:

$$\lambda_{\text{meas}} \approx \max\{\lambda,\ \log(\sqrt{2}\,\sigma/\varepsilon)\}. \tag{6}$$

Above the offset $\sqrt{2}\,\sigma e^{-\lambda}$ the model gives the true exponent. Below it, a noise term takes over, rising by one nat for every factor $e$ by which the offset shrinks. In the model, noise can thus make a contracting orbit look chaotic when the offset lies below $\sqrt{2}\,\sigma$, but it cannot make a chaotic orbit look stable. That one-sided conclusion holds only in the model: rounding can also suppress separation,

and noise can change the sampled dynamics or move a trajectory into another basin (below), so we compare offsets and tangent estimates rather than use the approximation as a one-sided guarantee.

The model assumes a single fixed leading direction with constant amplification, contraction within one step and no noise along the leading direction, so we test it in the network (Figure 54). The test uses Qwen2.5-0.5B in float64 at three cells of the philosophy-steered map: a chaotic cell, the weakly contracting period-3 loop of the coexistence example (Section 5), and a strongly contracting orbit; each runs 400 transient and 800 measured steps. In clean float64 the exponents do not depend on the offset over eight decades: $+0.092$ to $+0.099$, $-0.123$ to $-0.128$, and $-0.843$ to $-0.862$ for offsets from $10^{-12}$ to $10^{-4}$.

We then add Gaussian noise with $\sigma = 10^{-10}$, $10^{-8}$ or $10^{-6}$ to every row's next soft token.

- Where the noise dominates, all three cells give the same false exponent, which Eq. (6) matches within 0.006: for example 4.951 to 4.953 against $\log(100\sqrt{2}) = 4.952$ at $\sigma = 10^{-10}$ and $\varepsilon = 10^{-12}$.
- Where the offset lies well above the crossover, the prediction matches within 0.047.
- In the crossover itself, two offsets per cell and noise level, the measured exponent lies above the prediction by up to 0.43, because noise injected one step earlier has not yet contracted.
- Noise lowered no chaotic estimate below 0.087 (clean 0.092 to 0.099). It lowered the contracting estimates by at most 0.048, which makes them look more stable, not less.

A free twin that is never renormalized shows the difference directly (Figure 54d). Started at $10^{-12}$, the chaotic twin grows exponentially until its distance saturates near $10^{-1}$ after about 240 steps. Under $\sigma = 10^{-8}$, the period-3 twin instead jumps to a plateau at about $2 \times 10^{-8}$ (the model predicts $3 \times 10^{-8}$) and stays there.

The float32 final normalization, computed as in the early two-GPU runs and without added noise, reproduces the defect.

- At offsets from $10^{-10}$ to $10^{-8}$, both contracting orbits show positive exponents, up to 2.03 for the period-3 loop.
- At $10^{-12}$ and $10^{-11}$, rounding makes the twin and base rows identical in 454 to 771 of the 800 steps, leaving too few measurable steps to read.
- From $10^{-6}$ up, the contracting orbits read $-0.177$ to $-0.123$ and $-0.853$ to $-0.783$ (clean $-0.124$ and $-0.848$), and the chaotic one 0.059 to 0.078 (clean 0.094).

The last shift is of another kind. The defect changes the map itself, by about $10^{-8}$ at every step, not only the measurement, and the chaotic exponent of the changed map is lower, though still positive. The spurious Qwen2.5-72B window of Appendix I carries the signature of Eq. (6). Its exponent was negative at $10^{-5}$, near zero at $10^{-6}$ and positive at $10^{-7}$, and its orbits are periodic when computed in float64 throughout.

Hence the rule we apply: a chaotic label needs an exponent that does not depend on the offset. We check this with three offsets, or with an automatic-differentiation tangent vector, which needs no offset. Two limits remain.

- The argument concerns noise in a measured difference. Noise acting on the dynamics can change which attractor a trajectory follows, and in some maps it lowers a positive exponent, the phenomenon of noise-induced order [116]; see also [117]. Small per-step errors can accumulate,

or be amplified near weak stability and in nonnormal dynamics; a constant error $d$ moves the fixed point of $x' = \rho x + d$ by $d/(1-\rho)$, which grows without bound as $\rho \to 1$. Whether such errors change the attractor depends on the response and on the basin geometry; the per-step error alone neither bounds the displacement nor excludes a basin switch.

- Far below the rounding resolution, two rows can become identical. A naive estimator would then report infinite contraction, a false negative; ours reports the step as unmeasurable. The offsets of our maps lie far above the resolution of their arithmetic.

**How a fold or flip curve is found.** Every curve in this paper is found in the same five steps, all on the full map in float64. (i) *An orbit.* At one cell inside a window the loop is iterated from the fixed start until it settles; the period $p$ is the smallest return time of the full state, $\|F^p(x) - x\|$ small, and Newton's method on $F^p(x) = x$ with forward-mode Jacobians through the network refines the orbit to residuals near $10^{-14}$. (ii) *A branch.* The orbit is continued in one parameter ($\log_{10} T$ at fixed $\alpha$, or $\alpha$ at fixed $T$) by pseudo-arclength steps, and at every point all multipliers are computed from the monodromy matrix $M = DF^p$. A fold shows up as a turning point of the branch, where the orbit meets a saddle and the branch turns back (a multiplier passes $+1$); a flip shows up as a real multiplier crossing $-1$, where the orbit doubles. (iii) *A curve.* From the boundary point found on the branch, the bifurcation itself is continued in the plane of the two parameters. The unknowns are the orbit point and the two parameters; the equations are $F^p(x) - x = 0$ and one scalar test function $g = 0$, the last component of the solution of the bordered linear system with matrix $[[M \mp I, v], [w^\top, 0]]$, which vanishes exactly when $M$ has the multiplier $\pm 1$ (upper sign: fold) [41, 42]. Newton's method with Jacobian-vector products through the network corrects each pseudo-arclength step. (iv) *A gate at every point.* A point is drawn only if its residual is at most $10^{-10}$ and the critical multiplier of the dense monodromy is real and within $10^{-7}$ of $\pm 1$; rejected points are counted and never drawn. (v) *Cusps and the check against the map.* Where a fold curve's direction in the plane reverses, a cusp candidate is located by the sign change of the oriented quadratic coefficient of the fold normal form, and accepted only if the cubic coefficient and the unfolding determinant are nonzero. Finally, where the attractor followed cell by cell ends, a computed curve must be near (the boundary gates of the figures). For the 0.5B model one curve point takes about 50 s on one H100 GPU.

**Periodic orbits.** We solve $F^p(x) = x$ by Newton's method with forward-mode Jacobians. The multipliers are the eigenvalues of the monodromy matrix, the ordered product of the step Jacobians along the orbit, which plays the role of the Floquet matrix of a flow [42]; where the dense matrix is not float64, we refine them by a short Arnoldi factorization with float64 Jacobian-vector products.

**Continuation.** Periodic branches are continued in one parameter by pseudo-arclength continuation, and fold and flip curves in two parameters with minimally augmented systems [41, 42]. The test function $g$ of the bordered system $[[M \mp I, v], [w^\top, 0]]$ is obtained by GMRES (generalized minimal residual iterations) with Jacobian-vector products, and its gradient by reverse-mode differentiation through a Jacobian-vector product. When the parameter tangent reverses, we flag a cusp candidate and test it with the normal form. To locate a codimension-two point on a continued curve (`tools/cusp_locate.py`), we bracket a sign change between two curve points, then retrace the curve from the left end with steps of a quarter of the bracket. We do this for three rounds and finish with a secant step. The function whose sign changes is the oriented quadratic coefficient $b \operatorname{sign} a$ for a cusp, $|\mu_2| - 1$ for a second multiplier $\mu_2$ leaving the unit circle, and the projected parameter

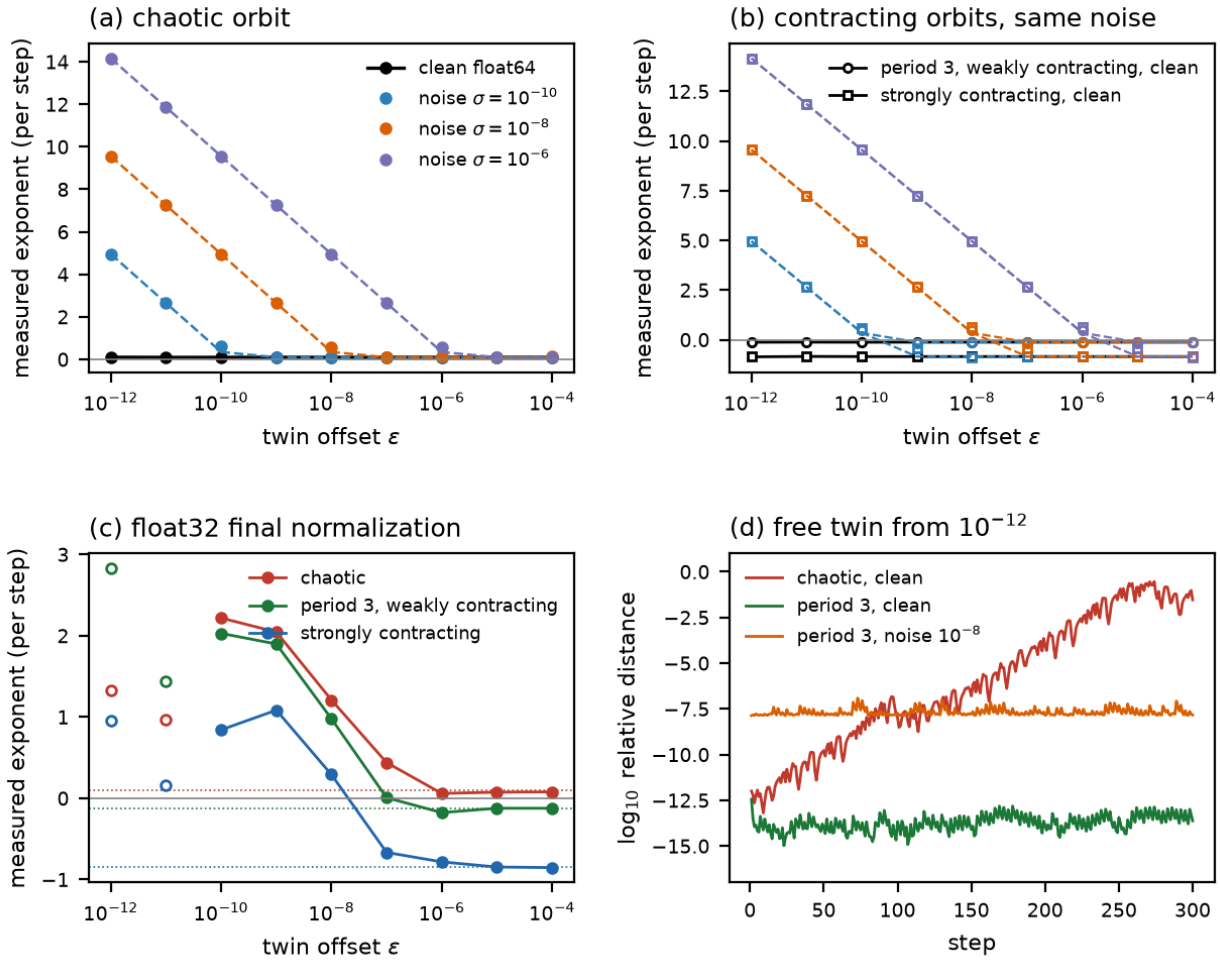


**Figure 54:** False chaos and real chaos in a twin test (Qwen2.5-0.5B-Instruct, float64, philosophy direction at block 12; 400 transient and 800 measured steps). The twin exponent is the mean logarithmic growth of a second row renormalized to the relative offset $\varepsilon$ after every step. (a) A chaotic cell ($\alpha = 0.0652$, $\log_{10} T = -0.156$): clean float64 (black) and Gaussian noise of relative size $\sigma$ added to every row's next soft token (colors); dashed, Eq. (6) with the clean exponent. (b) The same for a weakly contracting period-3 loop ($\alpha = 0.0642$, $\log_{10} T = -0.156$; circles) and a strongly contracting orbit ($\alpha = 0$, $\log_{10} T = 0.18$; squares): below the offset $\sqrt{2}\,\sigma$ both read as chaotic. (c) The float32 final normalization of the early two-GPU runs, without added noise: false positive exponents near float32 resolution. Open markers mark offsets at which the twin and base rows became identical in more than half of the steps; dotted lines mark the clean exponents. (d) A free twin, started at $10^{-12}$ and never renormalized: real chaos grows; under noise the contracting loop's twin jumps to the noise level and stays there; in clean float64 it stays near $10^{-14}$, the rounding floor of the map.

tangent for a turn of the curve. At a cusp we then evaluate $c$ and the unfolding matrix at the located point. Elsewhere, the multipliers and the angle between their eigenvectors type the point: a double multiplier whose eigenvectors coincide is a Jordan block. On maps with known answers the tool recovers a cusp to $10^{-6}$ (with $c = -1$ and $\det K = 1$) and a fold-flip point.

**Normal form and passages.** Consider a fold of the two-step map $G = F^2$, with right and left eigenvectors $r$ and $\ell$ normalized by $\|r\| = 1$ and $\ell^\top r = 1$. Along the critical direction the reduced map is $u' = u + a\varepsilon + bu^2$, with $a = \ell^\top \partial_\alpha G$ and $b = \frac{1}{2}\ell^\top D^2 G[r, r]$. We compute $b$ by central differences of float64 Jacobian-vector products over a step-size plateau (later cross-checks use nested automatic differentiation), and $a$ includes the steering's effect on the prefix. The signed coefficients are kept in the original eigenvector gauge, with $\varepsilon$ measured in the free parameter ($\alpha$ or $\log_{10} T$, whose units apply to $a$). On maps with known normal forms the code recovers $ab$, the cubic coefficient $c$ with its center-manifold term and the two-parameter unfolding matrix, and it traces the analytic fold and flip curves of the Hénon map (`tests/test_bifurcation_curves.py`). For passages we set $v = \operatorname{sign}(b)\, u$ and take the ghost side $p - p_c = \operatorname{sign}(ab)\, \epsilon$ with $\epsilon > 0$, so that $v' = v + |a|\epsilon + |b|v^2$ to quadratic order. A full passage starts at $v = -U$ and a midpoint passage at $v = 0$; both end at the first strict crossing $v > U$, with $U = 0.1/|b|$. We compare passage counts with the iterated quadratic map and with the arctangent formula [48].

**Period-doubling cascade.** Along a cut in one parameter, we locate the flip of each period-$p$ orbit as the root of $\operatorname{Re} \mu_c + 1$, where $\mu_c$ is the multiplier with the smallest real part, using the Illinois variant of regula falsi with warm-started orbits. All but one or two multipliers are small, so Newton's method on $F^p(x) - x$ needs the monodromy only on a six-dimensional dominant subspace. We obtain that subspace by subspace iteration with forward-mode Jacobian-vector products chained along the orbit, so no dense Jacobian is formed, and the residual is always the exact float64 $F^p(x) - x$. Each root is classified before it is accepted. The critical multiplier must be real and equal to $-1$, with a Ritz residual below $10^{-6}$, and the other computed Ritz values (six in all, estimates of the dominant spectrum) must lie inside the unit circle. We then reach the period-$2p$ orbit by forward iteration inside the next band. On the logistic map embedded in six dimensions, the procedure reproduces the first four flip parameters to $10^{-9}$. This classifies the crossing, not the bifurcation: the cascade flips of Section 9 and the flip curves of Section 11 are located where a real multiplier crosses $-1$ and confirmed by the doubled orbits beyond them. Flip coefficients were computed only at the two flips of the high-temperature bubble (Table 15), so the other flips are not classified as super- or subcritical.

# C Theory background, network contraction and the dimension of the chaos

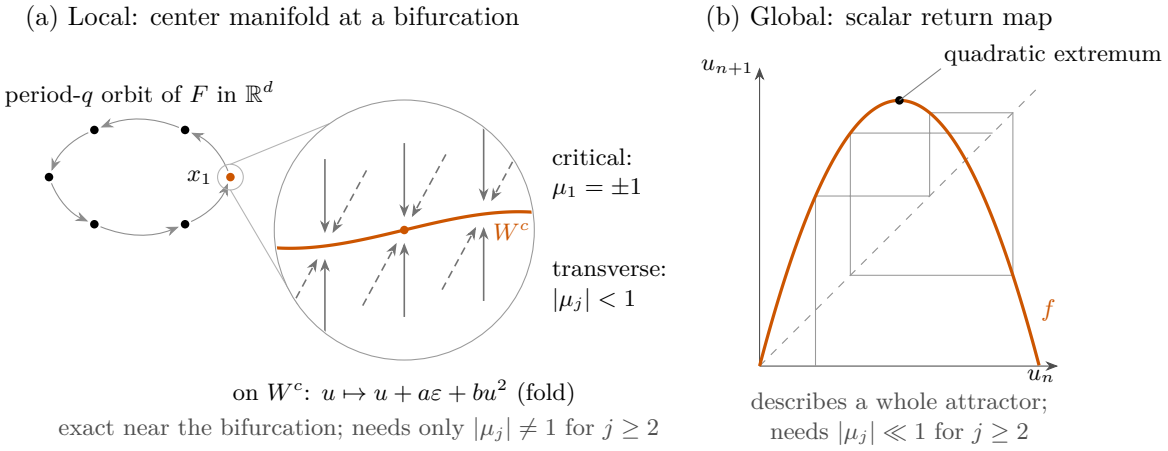


**Figure 55:** Two reductions to one dimension (Section 3). (a) Near a bifurcation of a period-$q$ orbit of the soft-token map (dots; arcs: the map), the dynamics of $F^q$ near a point $x_1$ of the orbit reduce to its center manifold $W^c$, tangent to the critical eigenvector of the monodromy matrix (multiplier $\mu_1 = \pm 1$; drawn with one critical direction, as at a fold, a flip or a cusp; a 1:1 resonance or a fold-flip point has two). The other multipliers lie off the unit circle; drawn here inside it, the transverse directions contract onto $W^c$ (dashed arrows stand for the remaining dimensions). The reduction is exact near the bifurcation whatever the size of the other multipliers; the normal forms of folds, flips, cusps and 1:1 resonances rest on it. (b) A global scalar return map $u \mapsto f(u)$ with a quadratic extremum, the diagonal (dashed) and a few iterates (gray). It describes a whole attractor only when the other multipliers are small.

**Why the structures of low-dimensional maps appear.** The map acts on a space of hundreds to thousands of dimensions, yet two reductions make low-dimensional theory apply (Figure 55). Near a bifurcation of a periodic orbit the center manifold theorem reduces the local dynamics to the critical directions, whatever the size of the other multipliers, as long as they stay off the unit circle; the normal forms are the leading terms of this local reduction [42]. Our normal forms of folds, flips, cusps and 1:1 resonances rest on this reduction alone. A scalar description of a whole attractor needs additional, global evidence. The small non-critical multipliers of the periodic orbits we computed show strong transverse contraction near those orbits and motivate that description: they range from about 0.1 at short periods to below $10^{-13}$ along the cascade (Sections 8 and 9 and Appendix E), and along the cascade at $\log_{10} T = -0.156$ the next modulus falls from 0.12 at the first flip to 0.045, $7 \times 10^{-5}$, $4 \times 10^{-7}$ and $2 \times 10^{-13}$ at the next four. Temperature, through the gain of (3), and steering act as two parameters. One-dimensional families of maps with a quadratic extremum can exhibit fold and flip curves, nondegenerate cusps, period-doubling cascades whose interval ratios tend to Feigenbaum's $\delta$, and saddle-node windows that accumulate on a fold with $d_N \propto N^{-2}$ (Figure 56 sketches the objects we locate); we test these predictions on specific branches and parameter sequences in Sections 8 to 11. The organization of shrimps needs more, either a second turning point of the reduced map or a second dimension [4, 55]. We test the consequences where we state them: the multipliers of each orbit, the interval ratios, and the normal-form predictions of passage times and coexisting orbits. Where the second multiplier is not small, as in the high-temperature bubble of Section 9 (next moduli 0.28 and 0.38) and along the period-5 curves of Section 11 (up to 0.39), the global reduction is only a rough guide, while the local normal forms still apply.

**Coexisting attractors constrain one-dimensional descriptions.** A classical theorem says what a one-dimensional reduction cannot do. If an interval map is three times differentiable, unimodal and has negative Schwarzian derivative, $Sf = f'''/f' - \frac{3}{2}(f''/f')^2 < 0$, the immediate basin of every attracting periodic orbit contains the turning point or an endpoint of the interval [39]; if basins reaching an endpoint are excluded, at most one attracting periodic orbit remains. The soft-token map has coexisting attracting orbits in several places. Near each located cusp with $c < 0$, two attracting orbits of the same period coexist with a saddle between them (periods 4 and 6, Appendix E; period 7, Section 10). Inside the hostile period-7 body, the period-7 loop coexists with a fixed point, which the fixed start reaches at isolated cells. Such coexistence constrains a scalar interpretation: unless one attractor's basin reaches an end of the scalar interval, the effective one-dimensional dynamics cannot be a single unimodal map with negative Schwarzian derivative, and needs a second turning point, a stretch of positive Schwarzian derivative, or a second dimension. A second turning point is also what a doubly superstable shrimp center requires.

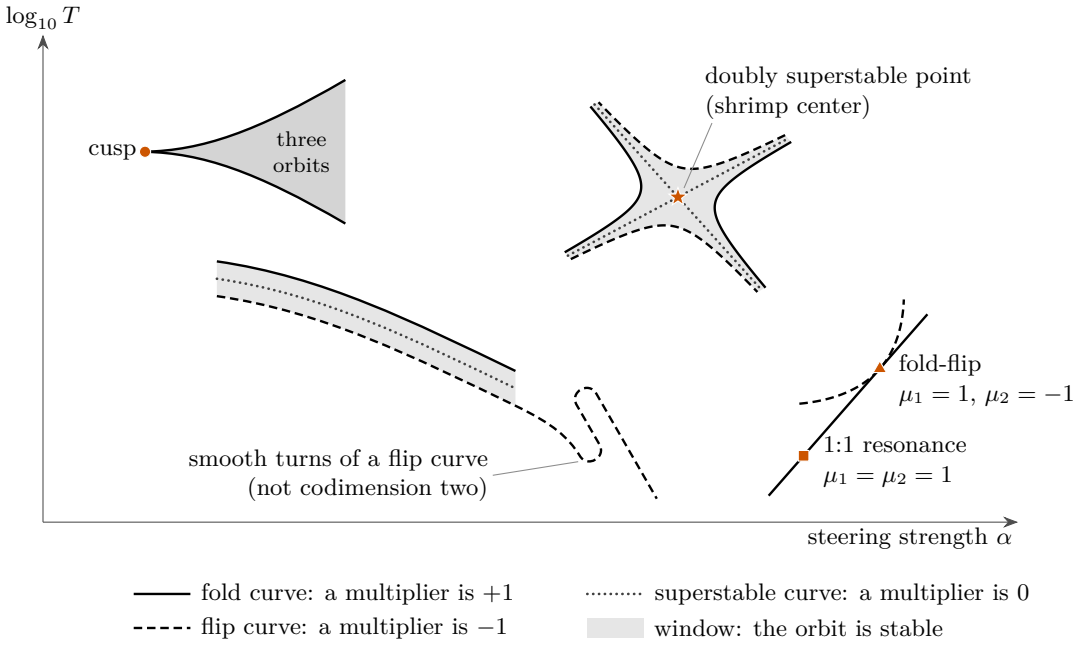


**Figure 56:** Schematic of the bifurcation objects in the plane of steering strength $\alpha$ and $\log_{10} T$ (not data; positions and shapes are illustrative). On the curves a multiplier of the orbit equals +1 (fold), −1 (flip) or 0 (superstable); gray marks windows, where the orbit is stable. Between two fold curves that meet in a cusp, three orbits coexist. A flip curve can turn tightly but smoothly, which is not a codimension-two point. On a fold curve, a 1:1 resonance is a point where a second multiplier also reaches +1, and a fold-flip point is one where a flip curve touches it. Two superstable curves of one orbit cross at a doubly superstable point, the center of a shrimp [4, 55]; near it the multiplier is approximately proportional to the product of the distances from the two curves, so the window is a cross whose sides alternate between fold and flip curves. Appendix E locates cusps, 1:1 resonances, a fold-flip point and smooth turns of a flip curve in the soft-token map, candidate superstable curves (sign changes of the leading real multiplier) appear in its exponent maps (Section 10), and Section 17 states which parts of this anatomy are not verified.

**What theory allows.** Chaos and periodic windows occur in many nonlinear feedback systems. In a specified ensemble of random recurrent networks with asymmetric couplings, chaos sets in above a critical gain, sharply in the large-network limit, and finite networks pass through limit cycles of increasing complexity on the way [21]; how the transition looks depends on the architecture and the

transfer function [118]. Discrete-time random networks, $x(t+1) = \tanh(gJx(t))$, iterate a map as our loop does: their fixed point loses stability when the gain times the spectral radius of the couplings exceeds one, the first bifurcation of large networks is a Neimark–Sacker bifurcation, and chaos follows by a quasi-periodic route, through a torus and frequency locking, over a range of gain that narrows as the network grows [22]. Our largest model narrows differently: Qwen2.5-72B passes from a confident echo to a nearly uniform fixed point within 0.03 decades of temperature, and its chaos is confined to narrow bands, whereas in random networks chaos is generic above the transition. External input can suppress that chaos [119], and deep networks at initialization show an order-to-chaos transition in signal propagation [86, 87]. In our map, temperature plays the role of an inverse gain and the steering vector that of an input. Section 3 makes the correspondence concrete through an exact chain-rule factorization, with the softmax derivative $(\operatorname{diag} p - pp^\top)/T$ in the place of the slope of the transfer function; the identification with the random-network transition remains an analogy, not a transfer of that ensemble's theorem. Feigenbaum scaling holds for a class of one-dimensional maps with a quadratic maximum [23], and periodic windows, shrimp-shaped domains with their cusps and spirals, and doubling cascades are found in many dissipative two-parameter systems [4, 54, 57, 120] and in experiments [77]; intermittency near folds is classical [48].

**Contraction and expansion in the network.** Analyses of deep attention identify contracting tendencies: pure self-attention collapses token representations toward a common vector with depth [121], and idealized attention dynamics form clusters [122]. Residual connections and MLPs counteract the collapse [121]. Which tendency wins along an orbit is a property of the trained weights that only computation settles. In every dense model we mapped, both outcomes occur: the same map has negative largest exponents in some regions of its parameter plane and positive ones in others.

**How many dimensions does the chaos have?** Near a periodic orbit, the multipliers measure how many directions the dynamics keeps (Section 3). For chaotic attractors the corresponding measure is the Kaplan–Yorke dimension [123], $D_{\mathrm{KY}} = j + \sum_{i \le j} \lambda_i / |\lambda_{j+1}|$ with $j$ the largest index at which the partial sum of the ordered Lyapunov exponents is still nonnegative; with one positive exponent and $\lambda_1 + \lambda_2 < 0$, $D_{\mathrm{KY}} = 1 + \lambda_1/|\lambda_2|$. We estimated the four leading exponents by QR iteration (Appendix B; 1000 transient and 2000 measured steps, float64) at 35 completed cells: 28 chosen by percentile of their largest exponent before any of their spectra were seen (of 30 requested), and seven from the earlier horizon check, six chaotic and one periodic control. At this horizon 31 have a positive leading estimate and none has two positive estimates. These are finite-time estimates, not asymptotic dimensions. They grow with temperature. Along the hostile temperature line, where we fit a scalar return relation (Section 10), eight chaotic cells have $D_{\mathrm{KY}} = 1.008$ to 1.16, consistent with nearly one-dimensional chaos. At fourteen chaotic cells of the headline maps ($\log_{10} T$ from $-0.17$ to $-0.04$) it is 1.03 to 1.65, rising with $\lambda_1$. In the high-temperature region ($\log_{10} T$ from $-0.02$ to 0.13), nine chaotic cells have $D_{\mathrm{KY}} = 1.37$ to 2.02; at two of them the sum of the first two finite-time estimates is nonnegative, which indicates noncontracting two-dimensional area at this horizon, although only one estimated exponent is positive. A scalar return map describes the low-temperature chaos well and the high-temperature chaos poorly, consistent with the large second multipliers of the high-temperature bubble of Section 9. The number of competing tokens does not set the dimension. The readout's trace-to-leading-eigenvalue ratio, $\operatorname{tr}\Sigma_p / \lambda_{\max}(\Sigma_p)$ averaged along the orbit (with $\lambda_{\max}$ estimated by eight power iterations), counts the directions in which the readout amplifies comparably. $D_{\mathrm{KY}}$ never exceeds it and rises with it within each group of cells (Spearman 0.72 over 17 philosophy cells and 0.69 over 8 hostile cells, computed when the data came in and

not independently reproduced; both are confounded with temperature). Across groups it does not predict the dimension: the hostile cells have ratios of about 16 to 19 and next-token entropies of about 7 to 9 nats, yet $D_{\mathrm{KY}} \leq 1.16$. The readout supplies many competing directions; the network decides how many of them expand.

# D Behavioral tests in detail

We looked for a behavioral signature of the regimes outside the loop. Two exploratory designs found no accuracy signature that survives controls. First, ordinary sampled answers of Qwen2.5-0.5B under steering at the strengths of chaotic and periodic map cells (30 matched pairs; arithmetic, open questions, short programs) showed no measurable accuracy contrast: at those strengths, steering every position turns every reply into philosophy-flavoured text, so accuracy sits at the floor in both zones (3 against 4 correct of 4500 arithmetic answers). Of nine secondary contrasts of entropy and reply length, one (open questions, next-token entropy, $p = 0.016$) passes 0.05 uncorrected, not after a correction for nine tests, and the entropy contrasts change sign across tasks. Second, labeling each of 200 prompts by the regime of its own unsteered loop in Qwen2.5-7B, prompts with a chaotic loop were answered far less accurately (by 26 to 37 points at three temperatures). The chaotic labels fell mostly on the harder task, and in a linear model with task, greedy correctness and the sampled answers' entropy, the label's coefficient is $-3.7$ to $-4.6$ points (permutation $p$ from 0.07 to 0.20). These are associations: the entropy is measured during sampling, so the adjustment does not identify a causal effect of the regime.

A frozen test addresses the second design. Its design, covariates and analysis were pushed before any data. It uses 4000 newly drawn products of two two-digit numbers and the unsteered Qwen2.5-7B-Instruct at $\log_{10} T = 0.40$: 1484 prompts have a chaotic loop and 2509 a periodic one (seven with other labels are excluded). Chaotic-loop prompts are again answered less accurately by ordinary sampling, by 7.1 points (95 % interval $[4.8, 9.3]$; 10 samples per prompt). The gap vanishes once seven difficulty covariates, all fixed before sampling, enter the fit. Beyond them the label's coefficient is $+0.15$ points ($[-1.4, 1.7]$, permutation $p = 0.84$), and the label adds no held-out predictive value. The first-token entropy alone absorbs nearly all of the gap (post hoc: $-0.8$ points remain). This fits the measurements of Section 3. The loop's chaotic cells have more competing next tokens than its periodic ones, and a model unsure of its first token also answers worse. Beyond that uncertainty, no association of the loop's regime with accuracy is detected at this precision; this does not show that the regime has no effect.

Within a prompt no association is detected either. We steered the first 1000 of these prompts slightly, at block 14 along philosophy, hostility-vs-kindness and a random direction. The strength, 1 % of the residual norm, is the largest at which greedy accuracy stayed within 5 points of the unsteered model on the first 200 of these prompts (so the calibration overlaps the test prompts); on the 1000 prompts it is 0.87 to 0.89, against 0.89 unsteered. Under these pushes the loop's label differs between conditions for 508 of the 1000 prompts. With prompt and condition fixed effects (3992 prompt-condition rows), in an analysis fixed before the data, a chaotic label is associated with a change of $+0.36$ points in the accuracy of the prompt's ordinary sampled answers (95 % interval $[-0.36, 1.08]$; permutation within prompts, $p = 0.34$). This does not identify a causal effect of entering chaos: the pushes can act on the answers through other paths as well.

Nor does accuracy peak at the edge of chaos. Adjusted for the covariates, three groups of prompts (3603 of the 4000; the rest have intermediate exponents) are answered alike:

- deep periodic ($\lambda \leq -0.3$, 1961 prompts): $+0.3$ points;

- edge ($|\lambda| \leq 0.1$, 242 prompts): $-0.1$ points;
- deep chaotic ($\lambda \geq 0.3$, 1400 prompts): $+0.3$ points.

All three intervals lie within $[-3.1, 3.0]$. The edge contrast is $-0.4$ points ($[-3.5, 2.6]$), and the curvature in $\lambda$ is positive, the opposite of an edge optimum. Post hoc, the curvature comes from the most strongly contracting tenth of prompts ($\lambda \leq -3.42$), answered 5.3 points ($[3.0, 7.6]$) better than the covariates predict. That is a lead for a future test, not a finding.

**Sensitivity without control.** A loop whose answers change with rounding differences raises a further question: can a deliberate perturbation of one fed-back token steer the answer to a chosen wrong value? An exploratory test asked this of the Qwen2.5-0.5B soft-thinking pipeline on two-digit additions, in float32, with 16 soft steps, at temperatures 0.3 and 1.0, on 16 development and 64 held-out problems. The target was the correct sum plus or minus 10. A 20-step projected gradient ascent on the target's log-probability perturbed the first soft token by one token norm, and random search over 45 directions with at least as much computation served as the comparison. On the held-out problems, the early perturbations reached the target in 5 of 101 problem-temperature pairs that the unperturbed pipeline answered correctly, and random search in none: a difference of 4.2 points (95 % interval $[0.8, 8.3]$), below the advantage of 10 points that the design required. The same optimization applied to the last soft token before the answer cue reached the target in 14 of the 101, so in this pipeline the loop gives less leverage early than late. Random early perturbations of that size changed about a third of the answers (one random direction: 34 of the 101 eligible pairs), almost never to the target. Here the loop's sensitivity comes without selective control. The test covers temperatures at which the loop contracts for most problems (on the development problems 10 and 38 % of twins expanded, with median rates of $-0.131$ and $-0.058$ per step), where the pipeline still answers correctly, and the doses and the optimizer were chosen on the development problems (`docs/pi/c12-1-summary.json`).

**Taming and using the sensitivity.** Two exploratory tests with Qwen2.5-7B-Instruct in bfloat16 (512 unused GSM8K training problems, 16 at each of 32 prompt lengths, fixed before any outcome; soft thinking with the top 15 tokens at $T = 0.6$ for 64 steps) asked whether the theory gives a remedy, and whether the sensitivity can be put to use. The factorization of Section 3 isolates the readout gain, which along recorded orbits of the 0.5B model carries most of the growth that steering adds. Lowering a step's temperature until a proxy of the readout gain fell below a cap (the cap could not be met on about 1 % of steps, at exact ties) reduced the share of answers that the batch layout changed from 27.7 to about 23 % (by 4.1 to 4.7 points at three caps), and accuracy did not fall. Lowering the temperature to 0.5 at every step, a control added after the first result, gained as much accuracy, and the caps' extra reduction of flips relative to it (2.7 to 3.3 points) was not significant. So the remedy is modest and not shown to be specific to the readout. Second, a plurality vote over eight runs whose first soft token was displaced by a relative $10^{-3}$ showed no detectable accuracy gain over one run ($+0.2$ points, $[-1.0, 1.4]$), although one displacement changed 20.2 % of the answers on average; sampled self-consistency with eight samples gained 5.6 points ($[3.5, 8.1]$). The perturbed runs differ, but rarely toward the correct answer. Problems whose perturbed runs disagreed were also the ones answered correctly least often (`docs/pi/e2-summary.json`, `docs/pi/e3-summary.json`).

**Weight quantization and the attractors.** Deployed models are often quantized, and quantization is usually checked one step at a time, by how close the quantized model's next-token distributions stay to the original's. An exploratory test asked whether that check certifies the

closed loop. We quantized every linear weight of the decoder blocks of Qwen2.5-0.5B-Instruct, either in 8-bit blocks (as the Q8_0 format of llama.cpp) or in symmetric 4-bit blocks, and kept the arithmetic in float64. The unsteered loop then ran on 48 held-out prompts, at 8 temperatures over $\log_{10} T \in [-0.5, 0.5]$, from 2 starts each. A frozen random logit bias, scaled so that its one-step divergence matches the 8-bit variant's, served as an unstructured control.

- *8-bit.* The one-step distributions stay close: on the reference's attractor states the mean Kullback–Leibler divergence is 0.0028 nats, and the most probable token agrees in 94.5 % of states. The share of starts that end on a periodic orbit of period at most 8 shows no detectable change (+1.2 points, 95 % interval $[-1.9, 4.2]$). Yet 14.1 % of the starts end in a different class or period, as do 15.0 % under the random bias of the same one-step size. These changes concentrate at the temperatures where the attractors change.
- *4-bit.* The share rises by 6.8 points ($[2.6, 11.0]$), mostly because the edge of a chaotic band turns periodic. Its one-step distributions, however, are far from the original's: the mean divergence is 0.83 nats, and the most probable token agrees in only 52 % of states.

In this model, then, a close one-step check was consistent with unchanged statistics of the closed loop but did not fix the attractor that an individual run reaches. We found no effect of quantization beyond that of unstructured noise of the same one-step size (docs/pi/c12-2-summary.json).

**Chaos onset and repetition in sampled text.** Does the temperature at which a prompt's loop turns chaotic predict the temperature at which ordinary sampled text stops repeating itself verbatim? An exploratory test with Qwen2.5-0.5B-Instruct on 24 held-out prompts did not detect the proposed positive association. The Spearman correlation is $-0.23$ (95 % interval $[-0.60, 0.25]$, permutation $p = 0.28$). This is not evidence of no association. One sensitivity analysis (orbits of period up to 32, clustered by system prompt) gives an interval that excludes zero on the negative side, $[-0.62, -0.18]$. At matched temperature, the repetition rates of chaotic and periodic cells differed by 0.003 (interval $[-0.013, 0.023]$), with both regimes present at only 8 of the 24 temperatures. In 13 of the 15 prompts where both onsets were observed, sampled text stopped repeating below the loop's chaos onset. The median gap over these 15 is 0.42 decades of temperature. The soft-token loop and sampled decoding with a growing context are different systems, and this test did not find a bridge between them (docs/pi/e5-heldout-analysis.json).

**Coupled agents (behavioral check).** Two Qwen2.5-1.5B-Instruct agents solving the same multiplication problem each fed back a fraction $1 - c$ of their own concept token and $c$ of the other's, while their contexts grew (64 problems, 8 pairs each; float32; exploratory). At $c = 0.25$ wrong-answer agreement rose by only 1.6 points ($[-0.6, 3.9]$) and accuracy fell by 5.5 points, as it did with replayed messages. At $c = 0.5$ mixing gives the two agents equal next inputs, although their growing contexts differ. They then agreed on 96 % of answers, including 41.0 % of pairs that gave the same wrong number, and accuracy was 12.5 points lower than for independent agents (docs/pi/c12-3-summary.json).

**Steering history and a policy decision.** Coexisting attractors suggest that the history of a steering schedule can matter, not only its present value. An exploratory test asked this of a decision with right and wrong answers. Qwen2.5-3B-Instruct, thinking in soft tokens, judged synthetic access-control requests against a supplied permission table, answering ALLOW or DENY, while a permissive-versus-restrictive direction steered it at layer 18. Every run ended with 32 steps at the same steering strength ($\alpha = 0.025$). Some runs got there directly; others first made a brief excursion

to $\alpha = 0.04$ and back. In the exploratory run, the excursion raised the share of prohibited requests wrongly allowed from 49.5 to 70.8 %, a difference of 21.4 points (95 % interval over 24 held-out instances $[15.6, 26.6]$; `docs/pi/c12-4-summary.json`).

We then repeated the test as a confirmatory one. The design, the analysis and a new set of 48 instances (drawn from a new pool of users) were fixed and pushed before any data (`docs/pi-c12-4-confirmatory.md`), with the prediction that the excursion would raise false allowing by at least 10 points, with an interval excluding zero. The prediction held, with a smaller effect: 13.0 points ($[7.2, 18.8]$ over 24 prohibited instances) after the 32 steps at the final strength, and 15.1 points ($[10.4, 19.8]$) after 64 steps. A second permissive direction, built the same way from differently worded statements (cosine 0.77 with the first), gave 19.3 points ($[12.5, 26.1]$). A restrictive excursion raised false denials of permitted requests by 23.4 points ($[17.1, 29.7]$). An excursion of the same size along a random direction showed no detectable effect ($-3.1$ points, $[-8.9, 2.1]$), and an excursion of zero size changed none of the 384 decisions (`docs/pi/c12-4c-summary.json`). The present steering strength therefore does not describe the steered model's behavior here. The effect persists after the steering values match. Because what the loop wrote during the excursion stays in its growing context, a memory of the context is the plausible mechanism, although these tests do not isolate it; this is history dependence of the protocol, not a demonstration of hysteresis in a fixed-size state. One model and one schedule were tested, in float32, with two wordings of one direction.

**Does the hidden state change answers?** In band chaos the loop writes an exactly repeating text while its state moves chaotically: the same token wins at each position, but the probabilities behind it keep changing (Section 10). An exploratory test asked whether states with the same visible history answer a follow-up question differently. We took 16 states at one phase of the text from each of 92 held-out band-chaos cells; within a cell, all 16 had identical leading tokens over the preceding 70 steps. Each state was read through the steered prefix, followed by one of three queries chosen on development cells: a yes-or-no question about hostility, a one-word mood, and a hostility rating from 1 to 10. Each answer was decoded greedily. No pair of states gave different answers in any cell for any query (a one-sided 95 % bound of 3.21 % of cells), although the probability of a fixed answer token differed at six significant digits in 98 to 99 % of the pairs. The hidden differences therefore reach the readout, but here they stay within the margins of the greedy choices, and only the wording of the yes-or-no answer changed, in 9 of the 92 cells. The visible text is not a complete record of the state. For these readouts that is a limit on what can be observed, not a change in behavior (`docs/pi/c12-5-summary.json`).

## E Bifurcation curves and cusps

**Period-8 stripe.** Continued for 80 points with a float64 test function, the fold curve of the period-8 orbit keeps its critical multiplier within $1 \pm 6 \times 10^{-6}$, follows the stripe's upper edge and caps its top near $\log_{10} T = -0.065$ (Figure 10). At $\alpha = 0.0717$ the stripe lies between a flip at $\log_{10} T = -0.128955$ and the fold at $-0.1033462$. Continued downward, the flip curve keeps its multiplier at $-1$ for 115 points to $(\alpha, \log_{10} T) = (0.0776, -0.402)$, with two reversals of its parameter tangent near $(0.0750, -0.219)$ and $(0.0746, -0.206)$, and the fold curve keeps its multiplier at $+1$ for 120 points to $(0.0758, -0.200)$. Located by bisection along the curve (Appendix B), the two reversals of the flip curve, at $(0.074955, -0.219336)$ and $(0.074608, -0.206007)$, carry no second multiplier near the unit circle (the next ones are $3 \times 10^{-7}$ and $1 \times 10^{-5}$). On a flip curve the parameter tangent can vanish only where a second multiplier reaches $+1$, so both are tight but smooth turns of the curve in the parameter plane, not codimension-two points.

**The accumulation boundary.** The fold curve of the 2-cycle "is it", continued from $(\alpha, \log_{10} T) = (0.0628, -0.115)$ in both directions (38 and 126 points, critical multiplier 1 to $10^{-7}$, no cusp), traces the boundary of the period-2 region in Figures 10 and 11. The stripe fan accumulates on this boundary, as the mechanism of Section 8 requires. Further along one direction, outside the plotted window, another multiplier leaves the unit circle (moduli up to 11). Located along the curve, this second real multiplier reaches $+1$ at $(\alpha, \log_{10} T) = (0.035628, -0.341724)$, where the eigenvectors of the two multipliers at $+1$ coincide to $3 \times 10^{-4}$ degrees: a double multiplier $+1$ with a Jordan block, the 1:1 resonance of maps (the analog of a Bogdanov–Takens point).

**A period-6 window with shrimp-like anatomy.** The hooks of Figure 12 (bottom) belong to the period-6 loop ". -\n\nThe is a". Float64 orbits (Newton residuals $10^{-15}$–$10^{-13}$) show that its curved body and its thin leg are one window: the multipliers are $-0.061$ and $+0.048$ at the body, $-0.564$ lower down and $-0.645$ on the leg. The foot is its period-doubled loop (period 12, leading multiplier $-0.156$). Inside the body lies a different 6-cycle, ".The\n\nThe is a", whose leading multipliers are a complex pair, $-0.031 \pm 0.152i$. One-parameter branches from the body end in folds in every direction: at $\log_{10} T = -0.0558$ and $-0.0721$ in temperature, at $\alpha = 0.08074$ in steering, and, toward smaller $\alpha$, in two folds only $10^{-5}$ apart. Such a close pair is the signature of a nearby cusp. A flip at $\alpha \approx 0.0797$ then opens the period-12 foot. The body is not effectively one-dimensional either. At two body cells the leading multiplier is a complex pair, $-0.020 \pm 0.264i$, or has a second multiplier of comparable size ($-0.261$ against 0.099). Below the body, where the window's strip appears to cross a period-5 strip near $(\alpha, \log_{10} T) = (0.0773, -0.0774)$, both orbits continued from their own strips are unstable at the crossing (leading multipliers $-1.88$ and $-6.59$). The crossing is therefore neither a center nor a point where two attractors coexist.

Fold curves that bound a window and meet in cusps, with flip curves inside, form the codimension-two organization of a shrimp [57] (complex dynamics of small recurrent networks has been studied in the same spirit [124]). In the continued curves (Figure 57), a single fold arc bounds the body on its outer side and a flip arc on its inner side, and the leg lies between them where they converge. The outer fold arc extends far to the left as a thin arm and ends in a cusp at $(\alpha, \log_{10} T) = (0.069106, -0.039750)$. The fold curve through the close fold pair has a second cusp inside the body, at $(0.080097, -0.058344)$, from which two fold branches descend.

At both reversals the quadratic coefficient $b$ changes sign between consecutive curve points while $a$ stays away from zero (Table 20). That alone is not evidence of a cusp: along any fold curve the parameter tangent reverses exactly where $b$ vanishes. The test's content is the nondegeneracy at that point. Because the signs of $a$ and $b$ both flip with the orientation of the critical eigenvector, the test uses $b \operatorname{sign} a$. A cusp is nondegenerate when the cubic coefficient $c$ of the normal form $u' = u + a\varepsilon + bu^2 + cu^3$ is nonzero where $b$ vanishes. We compute $c$ with the second-order center-manifold term, $c = \ell^\top C(r, r, r)/6 + \ell^\top B(r, h_2)/2$ with $(I - M)h_2 = B(r, r) - 2br$ and $\ell^\top h_2 = 0$, where $M$ is the monodromy matrix and $B$ and $C$ are the second and third derivatives of its map, obtained by central differences of float64 Jacobian-vector products. (The code reproduces $c$ to $10^{-6}$ on a map with a known reduction.) At the two curve points that bracket each sign change, $c$ is nonzero far beyond its step-size uncertainty and has the same sign, and $b$ changes sign with nonzero slope between them. This supports a nondegenerate cusp inside each bracket. Located along each fold curve (Appendix B), $b \operatorname{sign} a$ falls to below $5 \times 10^{-6}$ of its bracket values at $(\alpha, \log_{10} T) = (0.069106, -0.039750)$ on the outer arc and at $(0.080097, -0.058344)$ inside the body. At these same points $c = -1.51 \times 10^4$ and $-2.38 \times 10^5$, and the unfolding matrix $K$ defined below is regular ($\det K = 2416$ and 14.0): two numerically located cusps. (Location uses the small-step oriented coefficient $b \operatorname{sign} a$; the unfolding coefficients use a separate finite-difference ladder, and the

selected plateau of $c$ spreads by at most 4.8 % over adjacent steps.) The negative sign of $c$ means that near each cusp, two stable period-6 orbits coexist with a saddle between the fold branches.

A generic codimension-two cusp also needs the two parameters to unfold it independently. Near the cusp the reduced map is $u' = u + \beta_1 + \beta_2 u + bu^2 + cu^3$, where $\beta_1$ and $\beta_2$ vanish at the cusp and depend on the parameters. The unfolding is regular when $K = \partial(\beta_1, \beta_2)/\partial(\log_{10} T, 10\alpha)$ has rank two ($\det K \neq 0$). We first estimated $K$ at a fold point near the outer-arc cusp (where $b \operatorname{sign} a = 14.7$): $\det K = 2737$ (singular values 1630 and 1.7), so the estimated unfolding is nonsingular there, as it is at the located cusp ($\det K = 2416$). With these derivatives, the local cubic model predicted the number of period-6 orbits and their stability at six parameter offsets, written to disk before any orbit was solved. Newton solves started from the predicted roots and from the base state recovered the predicted number of distinct orbits, with the predicted stability, at all six. The search was seeded, not exhaustive: orbits that these starts do not reach would be missed.

| | cusp on the outer arc | cusp inside the body |
|---|---|---|
| $b \operatorname{sign} a$ at consecutive curve points | +92.9, +42.9, +14.7, **−16.9**, −52.8 | −24.7, −14.3, −2.0, **+12.8**, +28.0, +45.9, +58.9 |
| $\lvert a \rvert$ | 1.2–6.9 | 3.13–3.35 |
| $c$ at the two points around $b = 0$ | $-1.37 \times 10^4$, $-1.65 \times 10^4$ | $-2.38 \times 10^5$, $-2.34 \times 10^5$ |

**Table 20:** Normal-form test at the two parameter-tangent reversals of the period-6 window's fold curves (bold: the flagged points; critical multiplier 1 to $10^{-7}$). $c$: cubic coefficient at the two curve points that bracket the sign change (finite-difference steps agree to 0.1 and 0.7 %). Bisection along the curves then located both cusps (text); they are numerical, not certified.

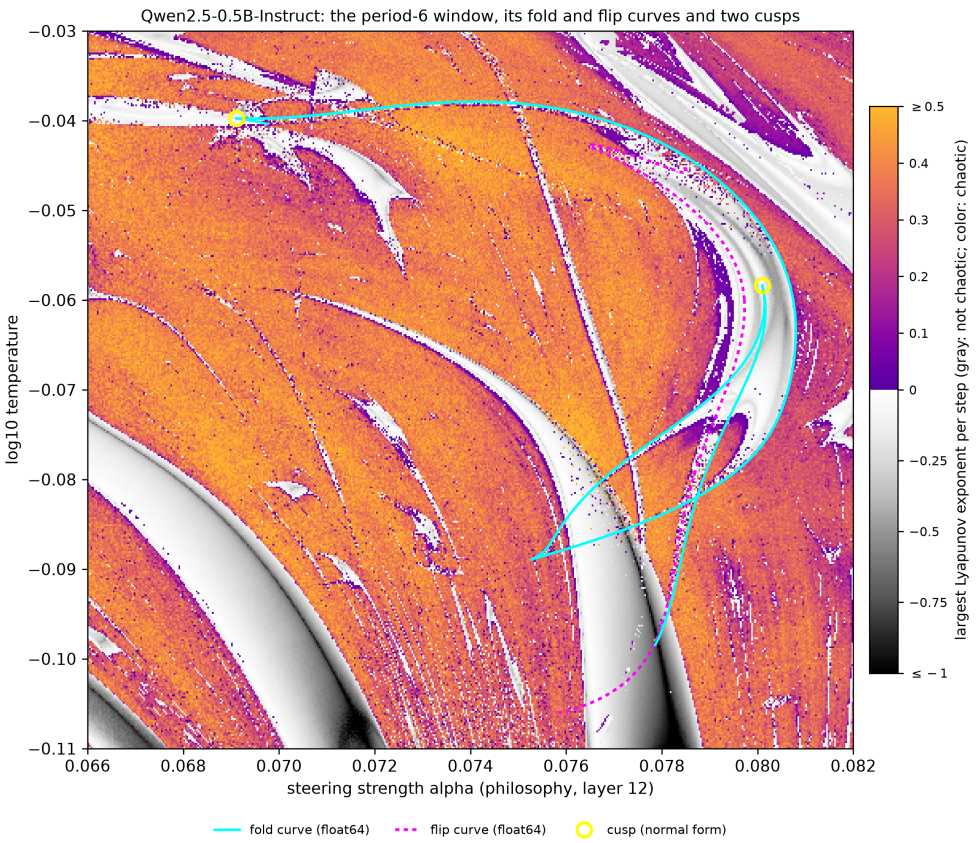


**Figure 57:** The period-6 window of the Qwen2.5-0.5B-Instruct map (philosophy direction, layer 12) with its float64 fold curves (cyan), flip curve (magenta, dotted) and the two located cusps (yellow circles). The background is a float32 phase map of $480 \times 400$ cells (largest exponent from 300 steps after 300 transient steps; chaotic cells colored by the exponent and the other cells in gray by theirs, on one color bar). Where it overlaps the float64 map of Figure 10, 95 % of cells carry the same chaotic or periodic label at the nearest grid point. Some fold branches were continued from two starting points and overlap. Continuation of the lower branches stopped after 60 points near $(0.0753, -0.089)$, where they approach each other; how they join there is not resolved.

**A period-4 window with five cusps on one fold curve.** At higher temperature, $\log_{10} T \approx 0$–$0.1$, periodic orbits are no longer effectively one-dimensional (second multipliers 0.06–0.09). At $\alpha = 0.06484$ the temperature branch of the period-4 orbit "\n\n - \n\n The" is S-shaped, with folds at $\log_{10} T = 0.0640$ and $0.0664$. When that fold is continued in the plane, its parameter tangent reverses at three points; at the first two, the quadratic coefficient $b$ changes sign while $a$ stays away from zero, and the cubic coefficient $c$ (defined above) is nonzero (Table 21). Located along the curve, these two cusps lie at $(\alpha, \log_{10} T) = (0.062959, 0.059958)$ and $(0.065574, 0.074447)$. There $b \operatorname{sign} a$ is below $1.1 \times 10^{-5}$ of its bracket values, $c = -1.02 \times 10^4$ and $+1.37 \times 10^5$, and $\det K = -42.0$ and $35.5$. Further traces of the same fold curve, started from other points of the period-4 branches, retrace it to within $3 \times 10^{-7}$, and one of them finds two more reversals near $\log_{10} T \approx 0.012$. All five reversals are located cusps. The other three lie at $(\alpha, \log_{10} T) = (0.083082, 0.108633)$, $(0.074072, 0.011831)$ and $(0.073220, 0.012759)$. There $c$ is $-9.7 \times 10^4$, $-5.7 \times 10^3$ and $+1.7 \times 10^3$, and $\det K$ is 25.3, $-188.5$ and 68.5. The last two cusps, close together, have opposite signs of $c$. Three period-4 orbits coexist between the two fold branches, and near the first cusp ($c < 0$) two of them are stable (Figure 58).

| | cusp 1 | cusp 2 |
|---|---|---|
| $b$ at five curve points | $+28.1,\ +18.7,\ +8.4,\ \mathbf{-1.1},\ -12.8$ | $+51.8,\ +29.7,\ +9.3,\ \mathbf{-9.0},\ -23.4$ |
| $a$ | 3.02–3.08 | $-2.58$ to $-2.57$ |
| critical multiplier | $1 \pm 10^{-9}$ | $1 \pm 10^{-8}$ |
| $c$ around $b = 0$ | $-1.06,\ -1.01$ ($\times 10^4$) | $+1.39,\ +1.36$ ($\times 10^5$) |

**Table 21:** Normal-form test of the two parameter-tangent reversals (bold: the flagged points). $c$: cubic coefficient at the points around the sign change, nonzero at both reversals (steps agree to $10^{-4}$), which supports a nondegenerate cusp inside each bracket; bisection then located both (text); at the second, $c > 0$: the orbit between the two others is the stable one.

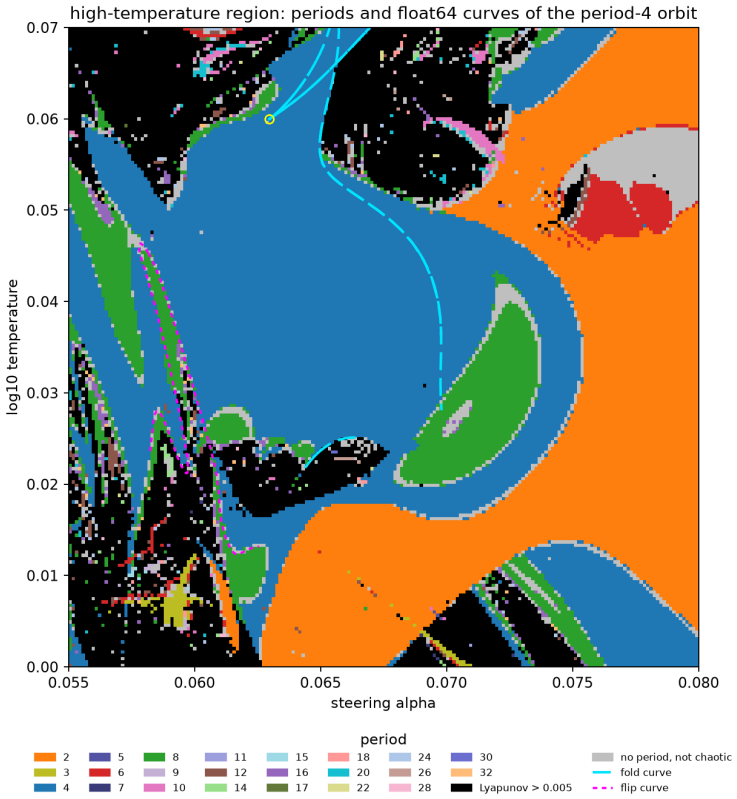


**Figure 58:** Period map of the high-temperature region of the Qwen2.5-0.5B-Instruct map (philosophy direction, layer 12; $192^2$ float64 cells) with float64 fold curves (cyan, long dashes) and flip curves (magenta, short dashes) of the period-4 orbit. The yellow circle is the first cusp; the second lies just above the window. The flip curves run along the boundary between period 4 and period 8. The fold curves run inside the period-4 region, where three period-4 orbits coexist (near the first cusp, two of them stable). In this map a C-shaped band of the doubled loop "\n\nThe\n\nThe" (period 4) inside the period-2 region "\n\nThe" contains period 8 and an irregular core. Along the cut of Section 9 the period-8 orbit merges back into period 4 (a doubling bubble), so this band is not shown to be a second cascade. Continued from all its fold points, the region's boundary consists of an upper fold curve, with the five cusps of the text, and a separate lower fold curve, nowhere within $2 \times 10^{-3}$ of it in the traced ranges; the lower curve carries the codimension-two points described below. Within the traced ranges the curves do not join, so the region is not shown to be one shrimp-organized component.

Along the lower fold curve a second real multiplier reaches $+1$ twice, at $\alpha = 0.062483$, $\log_{10} T =$

0.004955 and at $\alpha = 0.062499$, $\log_{10} T = -0.001780$. Both points are 1:1 resonances, with the eigenvectors of the double multiplier parallel to $3 \times 10^{-4}$ degrees. Close by, at $\alpha = 0.062522$, $\log_{10} T = -0.002667$, a multiplier reaches $-1$: a fold-flip point. We did not continue the curves that emanate from these points.

**Evidence level of the cusps.** We estimated the rank condition of the unfolding at a fold point near one cusp of the period-6 window and one of the hostile period-7 body (Section 10; determinants 2737 and 53.5), and there the local model's predictions at twelve frozen offsets matched the orbits recovered by Newton solves seeded at the predicted roots and the base state, in number at all twelve and in stability at eleven; the search was not exhaustive. At the thirteen located cusps themselves (including the four of the period-5 window of Appendix F), $|\det K|$ lies between 14 and 2416. These are float64 computations validated by step-size checks (rung 1), not computer-assisted proofs. At the two continuation points that bracket the lower cusp of the hostile body, an independent implementation of the model reproduced the normal-form coefficients, including the sign change of $b$: $|b|$ within 1.2 % and $c$ to two figures, with the opposite orientation of the null vector, which flips the signs of $a$ and $b$ together.

# F Steering toward hostility: further results

This appendix gives further results on the hostility direction of Section 10: the details of the shrimp-like shapes, the period-5 window of a plane steered at two depths, its orbit census and a closure test.

**Details of the shrimp-like shapes.** Section 11 summarizes the anatomy (Figure 40); three details belong here. In higher dimensions a window can also end where a complex pair crosses the unit circle, and the leading multiplier can change sign through a complex pair, as it does in parts of our windows; beyond some of the flip curves we followed lie the doubling sequences of Section 9, but a flip need not start a complete cascade. The period-6 hook's orbit never comes close to superstable: its leading multiplier stays above 0.028 in modulus. And the X-shaped crossing of a period-5 and a period-6 strip (Figure 12, bottom) is not one window's anatomy but two windows overlapping, and at the crossing both of their orbits are unstable (Appendix E). The shapes in these one-block planes are therefore the two-parameter unfolding of windows whose return maps have one coarse extremum: shrimp-like in body, legs and internal cascade, but without a one-dimensional shrimp center on the tracked branches.

**Two turning points from two steering depths.** Steering at two depths gives the band dynamics a second turning point. We drew 1584 chaotic cells (200 from each of the four two-block planes of Figure 19, 150 from each one-block map of Figure 18 and the 34 of the hostile line of Figure 26), counted the turning points of each band's return map and inspected every strong candidate by eye, since a projection can fold a single hump. Three cells, all in two-block planes at $\log_{10} T = -0.1$, have smooth, single-valued return maps with two or more turning points (Figure 63); the other strong candidates were point sets, split bands or folded projections, or were not reproduced. In one cell (hostility at block 4, gratitude at block 16), every one-dimensional phase of a 20-band attractor is N-shaped: a bimodal map. A $128 \times 128$ zoom around another, whose map has three maxima, shows a period-5 window with a body, legs, a period-10 and period-20 border, and patches where the fixed start settles on period 4 (Figure 64a). We continued the window's period-5 orbit over a $31 \times 31$ grid of its body: 608 cells solved, all with the same token loop, 447 of them attracting. In 61 of these

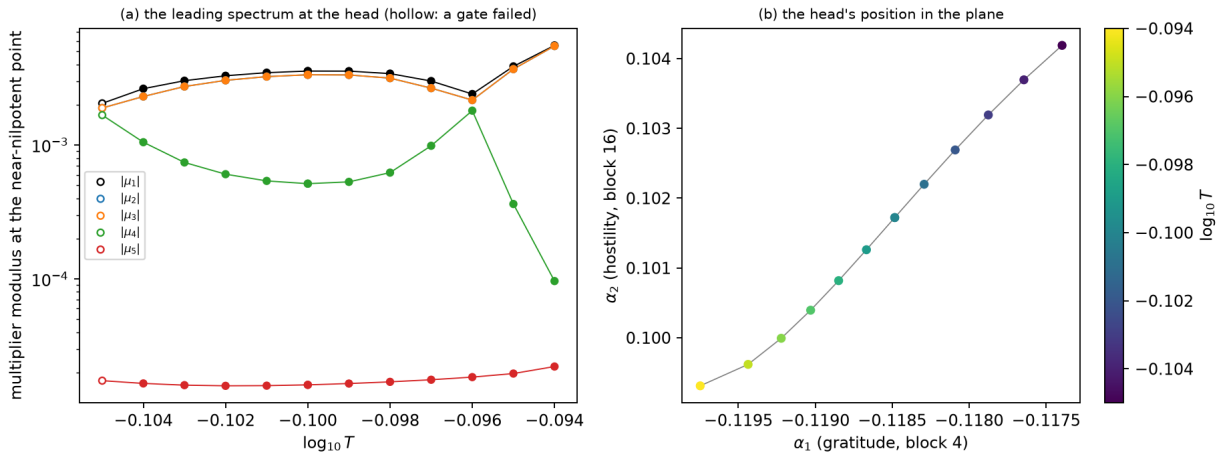


**Figure 59:** The head of the period-5 shrimp continued in temperature: the near-nilpotent point, where the sum of the leading multipliers and the sum of their pairwise products vanish (tools/nilpotent_track.py; float64, steps of 0.001 in $\log_{10} T$). (a) Moduli of the five leading multipliers at the point ($\mu_2$ and $\mu_3$ form a complex pair of equal modulus; hollow: the row failed its gate, $|c_1| > 10^{-7}$). The defining conditions would put the three leading multipliers on one modulus, the cube root of their product, if they were the only multipliers; the computed moduli are nearly equal, and a fourth multiplier approaches them twice. (b) The point's position in the plane, colored by $\log_{10} T$.

447 cells, the nearest cell of the zoom (at most $2.0 \times 10^{-5}$ away in $\alpha_1$ and $3.2 \times 10^{-5}$ in $\alpha_2$) settles on period 4, so attractors of periods 4 and 5 coexist at grid scale, which a single unimodal map with negative Schwarzian derivative allows only if a basin reaches an end of its interval (Section 3).

The window still has no one-dimensional center. The leading multiplier of the continued orbit never comes near zero: its modulus is at least 0.0139 in all 608 cells. Where a one-dimensional map would be superstable, it meets the second multiplier, and the two form a complex pair (91 cells, in narrow strips) or, where their product is negative (41 other cells), pass each other as real numbers of opposite sign (Figure 64c). Per step, the second direction contracts by a median factor of 0.44 and the first by 0.76 over the attracting cells, so near these strips the orbit's linearization has two comparable leading directions. The curves on which the trace $\mu_1 + \mu_2$ changes sign take the place of superstable curves, and they do not cross: no $2 \times 2$ block of attracting cells has the alternating signs of a crossing (Figure 64b). One isolated cell holds a repelling orbit with the same token loop ($\mu_1 = 1.65$), and near the top of the grid one column of Newton solves failed above cells whose leading multiplier rises to 0.88; both are explained by the window's fold curve (next paragraph). A second turning point in the band maps therefore does not give this window a one-dimensional shrimp center. Like the hostile body, it is a window whose orbit has two comparable leading directions near the strips where a one-dimensional map would be superstable; Section 11 shows that it is a numerically verified shrimp. Its head, the near-nilpotent point, persists wherever we continued it in temperature (Figure 59). At $\log_{10} T = -0.105$, grids of the continued orbit over the tip of the band where the leading multiplier is positive show the same avoided crossing: the band narrows between two strips of complex leading pairs, of modulus 0.097 to 0.109, which come within one cell of each other ($5 \times 10^{-5}$ in $\alpha_1$) without crossing (`docs/research-log.md`, runs P5Z).

**The folds and flips of the period-5 window.** To resolve the folds the grid did not, we continued the window's period-5 orbit along four lines from one attracting cell, $(\alpha_1, \alpha_2) = (-0.118730, 0.100693)$, and then the boundaries the lines found, each in both directions (float64; 18 to 73 points per line,

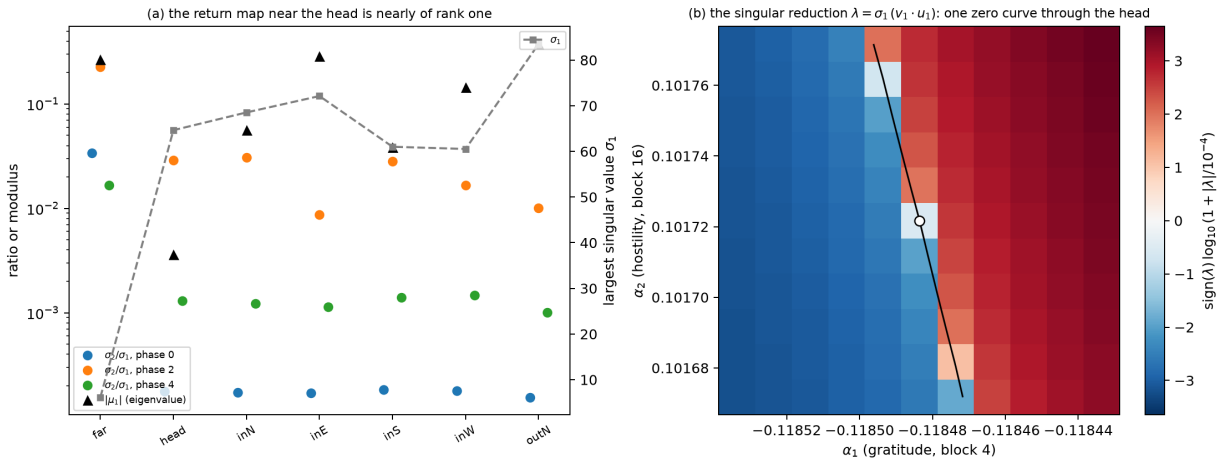


**Figure 60:** The rank of the period-5 shrimp's return map near its head (float64; `tools/monodromy_svd.py`, `tools/plot_head_rank.py`). (a) Ratio of the second to the largest singular value of the return map, for the cycle started at three phases, in the body far from the head, at the head (the near-nilpotent point), at four points $5 \times 10^{-5}$ from it and at one $2 \times 10^{-4}$ from it, with the largest singular value (squares, right axis) and the modulus of the leading eigenvalue (triangles). (b) The reduction to the rank-one part, $\lambda = \sigma_1 (v_1 \cdot u_1)$, on an $11 \times 11$ grid of spacing $10^{-5}$ around the head (white circle), shown as $\mathrm{sign}(\lambda)\log_{10}(1 + |\lambda|/10^{-4})$; its zero set (black) is one curve.

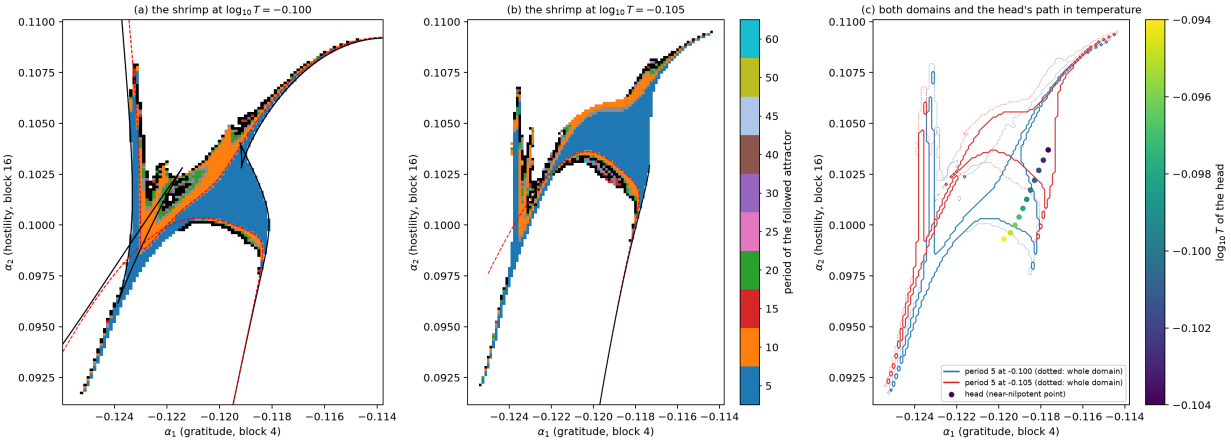


**Figure 61:** The period-5 shrimp at two temperatures (Qwen2.5-0.5B-Instruct, gratitude at block 4 and hostility at block 16, float64; `tools/plot_shrimp_temperature.py`). (a) The domain of its attractor at $\log_{10} T = -0.100$, followed cell by cell and colored by period (black: chaos behind the same five-token text; dark gray: no period found and an exponent below 0.005; light gray: the attractor was lost), with the fold (black) and flip (red, dashed) curves. (b) The same at $\log_{10} T = -0.105$, with the curves continued at that temperature (a partial trace of a further fold curve, with two flagged reversals, is not drawn). (c) The outlines of the period-5 body (solid) and of the whole followed domain (dotted) at both temperatures, and the path of the head (the near-nilpotent point) between $\log_{10} T = -0.104$ and $-0.094$, colored by temperature.

30 to 120 per curve; one of the eight curve runs failed at its start for lack of GPU memory, and its curve is covered by the other trace of the same fold). At every curve point the residual is below $10^{-10}$ and the test function below $10^{-9}$. The critical multiplier stays real and within $6 \times 10^{-8}$ of $+1$ on the fold curve and of $-1$ on the flip curves; the largest other multiplier modulus is 0.040 on that fold curve and 0.122 on the flip curves. A rerun of these curves on 18 October with wider bounds, toward the legs' tips, keeps every critical multiplier within $1.9 \times 10^{-7}$ of $\pm 1$, and the largest other modulus reaches 0.86 where the lower-right leg's fold and flip curves end at the bound of the continuation. Going right and up from the start, the orbit dies in folds at $\alpha_1 = -0.118166$ and $\alpha_2 = 0.102715$ (next moduli 0.0012 and 0.0008). Going left and down, it first loses stability in flips (at $\alpha_1 = -0.12147$ and $\alpha_2 = 0.09954$), regains it where the same multiplier crosses $-1$ again (at $-0.12305$ and 0.09586; a doubling bubble), and dies in a fold (at $-0.123323$ and 0.095720). Three of these four folds lie on one continued fold curve (within $3.1 \times 10^{-7}$); the left one lies on a second. The first fold curve bounds the lower-right leg on its right, runs up the body's right edge and over its top, and leaves along the upper leg. Near $\alpha_1 = -0.1192$ its parameter tangent reverses twice, identically on two traces continued from different boundary points, and both reversals are located cusps (the test and criteria of Appendix E, applied on each trace): at $(\alpha_1, \alpha_2) = (-0.1192221, 0.1040536)$, with $c = +2.60 \times 10^4$ and $\det K = 176.6$, and at $(-0.1191670, 0.1028019)$, with $c = -2.05 \times 10^4$ and $\det K = 88.6$. The two traces agree to $2 \times 10^{-12}$ in these positions and to five figures in $c$ and $\det K$. Its outer arms cross at $(-0.11901, 0.10346)$ (Figure 38d). There they are folds of two different period-5 orbits with the same token loop: at the four continuation points that bracket the crossing, the orbits on the two arms differ by 3.65 to 3.78 % of the state norm (root-mean-square over the five points, at the best phase alignment; both traces), 15.8 to 44.5 times the state change between neighboring curve points (`docs/fm5/crossing-orbits.json`). The second fold curve, continued both ways from the left fold, runs from below the lower-left leg far up the left of the plane, where the orbit has regained stability beyond its doubling bubble (critical multiplier within $1.2 \times 10^{-7}$ of $+1$ and other multipliers below 0.4; in the rerun, $1.9 \times 10^{-7}$ and 0.61). Within the bounds of 15 October it has two more reversals, both located cusps: $(-0.1238662, 0.0961512)$, with $c = -9.65 \times 10^3$ and $\det K = 405.9$, and $(-0.1214073, 0.1028234)$, with $c = +4.75 \times 10^4$ and $\det K = -535.4$ (condition $1.2 \times 10^4$). The rerun finds a third reversal, at $(-0.13295, 0.08530)$, which the continuation flags but we have not located. This curve also crosses itself, at $(-0.12341, 0.09904)$, between its points 6 and 64, which lie on either side of the two cusps (points 15 and 40), so that the two cusps share a segment and their other branches cross: a second dovetail. There too the arms are folds of two different period-5 orbits with the same token loop, which differ by 8.83 to 9.06 % of the state norm (measured the same way), 23 to 31 times the state change between neighboring curve points. In both dovetails the cusp with $c > 0$ lies above the one with $c < 0$. At all four cusps the critical multiplier is within $1.3 \times 10^{-9}$ of 1 and the second modulus below 0.008. The flip curves bound the body's upper-left and lower sides and run along the legs. The fold curve resolves both anomalies of the grid. The isolated repelling cell ($\mu_1 = +1.65$) lies $1.2 \times 10^{-5}$ from it, on the saddle branch, and the column of failed Newton solves at $\alpha_1 = -0.119167$ runs into the lower reversal, at $\alpha_1 = -0.119166$, where the followed orbit ceases to exist between the folded branches.

**The lower-left leg's own curves.** The followed attractor enters the lower-left leg, but no line from the body's start crosses it, and the curves continued from the body pass to its left. We therefore marched the period-5 orbit by Newton's method from the body's start, $(\alpha_1, \alpha_2) = (-0.11875, 0.10075)$, through the 68 cells by which the follow run entered the leg (66 of period 5, and 2 of period 10 where the orbit exists but is unstable) to $(-0.124375, 0.094)$. Newton's method converged at every cell, with largest relative residual $8.9 \times 10^{-13}$. At the end the leading multiplier

is $+0.64$. Along $\alpha_1$ the orbit loses stability in a flip at $\alpha_1 = -0.12451$ (real crossing multiplier; next modulus 0.0060), beyond which its multiplier falls to $-13.9$, and in the other direction it dies in a fold at $-0.1243654$ (next modulus 0.014). Both boundaries were continued both ways in float64. The two continuations toward the body were stopped by their time limit; their points were recovered from the runs' logs after the same checks. At every point of the four curves the residual is at most $10^{-10}$ and the test function at most $5.2 \times 10^{-10}$; the critical multiplier is real and within $3.7 \times 10^{-8}$ of $-1$ on the flip curve and of $+1$ on the fold curve, and every other multiplier has modulus at most 0.21. Downward, the two curves bound the leg to $\alpha_2 = 0.080$, the bound of the continuation. The strip between them narrows from 1.9 grid steps at $\alpha_2 = 0.096$ to 0.58 at 0.0919, the leg's lowest period-5 cell in the follow run, and to 0.015 at 0.080 (Figure 62c). Upward, the fold curve reverses direction at $(-0.11938, 0.10042)$, where the continuation flags a cusp that we have not located, and the flip curve bends sharply at $(-0.12214, 0.10135)$. Both then run back down the left of the plane alongside curves continued from the body, of the other kind, over $\alpha_2 \in [0.087, 0.0995]$: the returning flip arm at a median distance of 0.017 grid steps (at most 0.055) from the body's second fold curve, and the returning fold arm at a median of 0.055 (at most 0.46) from a flip curve of the body; they cross the body's curves only at isolated points. In every grid row from $\alpha_2 = 0.086$ to 0.096, every period-5 cell of the leg lies inside the strip (39 of 39), although the strip is only 0.58 to 1.9 cells wide in the rows that have such cells. The strip also holds two slowly converging cells and 16 cells that the follow run never computed, all below the leg's lowest period-5 cell (Figure 62b). Across the leg at $\alpha_2 = 0.094$ the multiplier passes from $+1$ at the fold to $-1$ at the flip within $1.5 \times 10^{-4}$ in $\alpha_1$ (Figure 62d).

**Orbit census of the junction.** Before any solve we fixed 13 points around the junction (`docs/oc/oc-points.json`) and the number of period-5 orbits that a plane section of a swallowtail predicts at each: four in the pocket bounded by the two cusps and the crossing, none beyond the crossing, and two elsewhere. At each point, Newton's method (low-rank, at most 20 steps) starts from the states of the nearest point on each arm of the fold curve, shifted along that point's critical eigenvector by $s|x|$ for $s \in \{0, \pm 10^{-3}, \pm 3 \times 10^{-3}, \pm 10^{-2}, \pm 3 \times 10^{-2}\}$ (27 starts per point). Orbits are distinct when they differ by more than $10^{-7}$ of the state norm at every phase. The counts are lower bounds, because the seeded search can miss orbits. Table 22 gives the results: 9 of the 13 counts match. The three undercounts found all the attracting orbits that the model predicts, so by the model each missed a repelling one. Above the upper cusp, two of the three orbits found share one token loop: a saddle (multiplier $+1.44$) and the node, which lies beyond the flip curve that passes the cusp (multiplier $-1.35$), so that no period-5 orbit attracts there (the classifier map shows a period-4 attractor next to this point). The third has another token loop and the multiplier $-130$, and only one start reached it; that it does not belong to the junction's family is a reading after the fact.

**A closure test that failed.** We also tested whether two coordinates forecast the window's nonlinear return map (run CL2). Perturbations of relative size $10^{-3}$ and $10^{-2}$ (64 per size, half to fit and half to test) were followed for eight returns; quadratic return models in one, two or four modal coordinates (the spectral projections on the leading eigenvectors), with a fitted lift back to the state, were iterated from the first return, and the error is the squared forecast error over the squared deviation, summed over returns 2 to 8. The test failed for numerical reasons: at most locations the iterated models diverged, with median errors up to $2 \times 10^{122}$, against at most 0.71 for the linearized map in the same rows. We did not establish why (in 9 of these 12 rows even the one-coordinate model diverges), and no regularized refit was run. At one location the divergence of

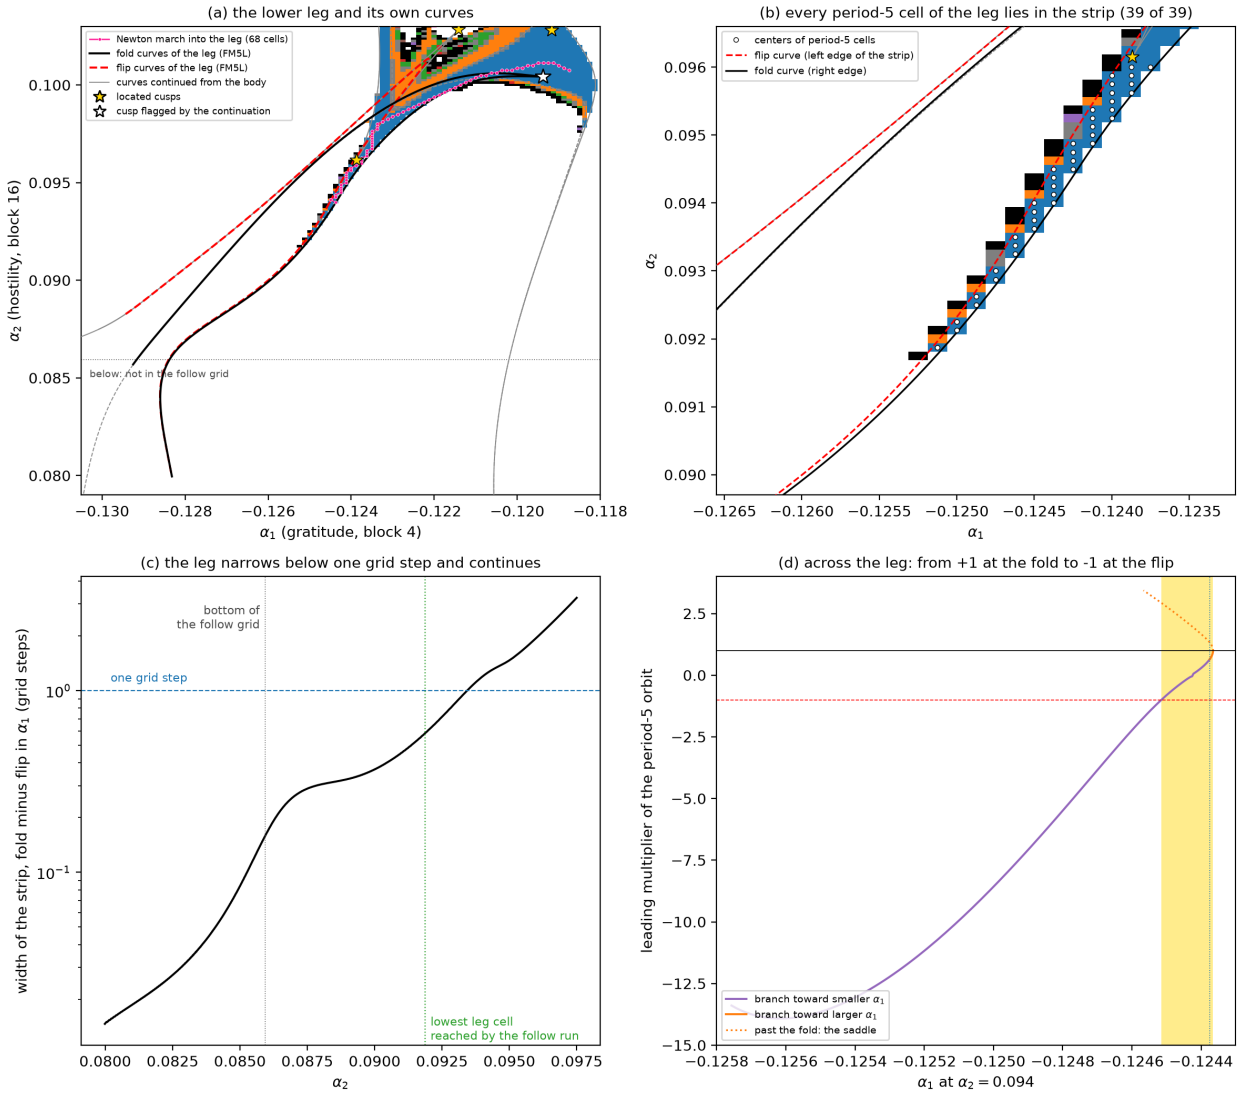


**Figure 62:** The lower-left leg of the period-5 shrimp and its own curves (Qwen2.5-0.5B-Instruct, gratitude at block 4 and hostility at block 16, $\log_{10} T = -0.1$, float64; `tools/plot_lower_leg.py`). (a) The followed domain (colors as in the followed domain of Figure 39b) with the fold (black) and flip (red, dashed) curves of the orbit marched into the leg (pink: the 68 cells of the march), the curves continued from the body (gray), the located cusps (gold stars) and the cusp flagged on the leg's fold curve (white star); the follow grid ends at $\alpha_2 = 0.086$ (dotted). (b) The centers of all period-5 cells of the leg (white dots) lie between the flip curve and the fold curve. (c) The width of the strip between the two curves, in grid steps: it falls below one step at $\alpha_2 = 0.0934$; the leg's lowest period-5 cell in the follow run is at 0.0919. (d) The leading multiplier of the period-5 orbit along $\alpha_1$ at $\alpha_2 = 0.094$, from $+1$ at the fold through $-1$ at the flip (shaded: the strip), and past the fold on the saddle branch (dotted).

| points | region | predicted | found | attracting |
|---|---|---|---|---|
| T-low, T-high, T-near-U | pocket | 4 | 4 | 2 |
| T-centroid, T-near-L | pocket | 4 | 3 | 2 |
| E-low, E-high | beyond the crossing | 0 | 0 | 0 |
| W-low, S-low, N-high, below-L | around the pocket | 2 | 2 | 1 |
| W-high | around the pocket | 2 | 1 | 1 |
| above-U | beyond the upper cusp | 2 | 3 | 0 |

**Table 22:** Orbit census of the junction of the period-5 window (run OC; Figure 38d): period-5 orbits found from 27 starts per point, and how many attract. The predictions were fixed before any solve.

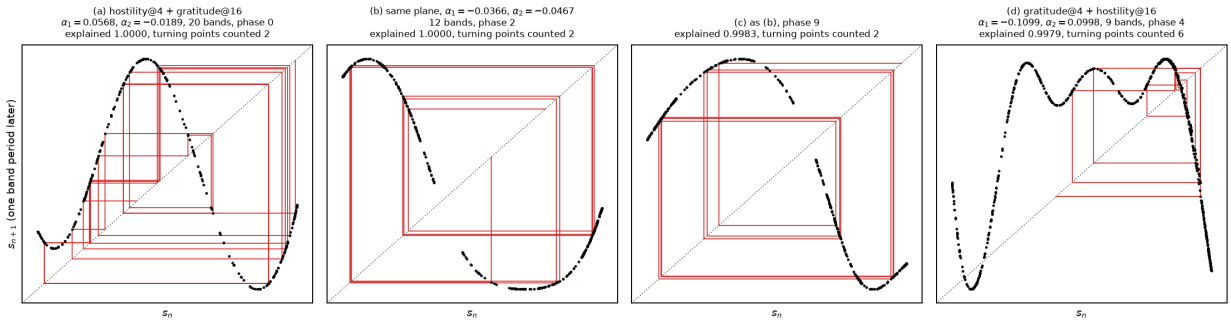


**Figure 63:** Band return maps with two or more turning points, from two-block planes of Qwen2.5-0.5B-Instruct (float64, $\log_{10} T = -0.1$). Each panel shows one phase of a chaotic band attractor, projected on its leading principal component $s$ (explained variance in the title), with points $(s_n, s_{n+1})$ one band period apart and, in red, a cobweb that follows consecutive visits (25 in (a), 12 in the others). (a) Hostility at block 4 and gratitude at block 16, $(\alpha_1, \alpha_2) = (0.0568, -0.0189)$: phase 0 of a 20-band attractor, N-shaped. (b, c) The same plane at $(-0.0366, -0.0467)$: two phases of a 12-band attractor, N-shaped maps on two intervals. (d) Gratitude at block 4 and hostility at block 16, $(-0.1099, 0.0998)$: phase 4 of a 9-band attractor, with three maxima.

the four-coordinate model satisfied the frozen two-coordinate criterion spuriously. A guard added after the run marks fits with a median error above 1 as degenerate; 12 of the 18 location-and-size rows are. At the body location, one coordinate gives errors of 0.026 and 0.031 and two coordinates below $6 \times 10^{-5}$. We draw no conclusion about two-dimensional closure from this test.

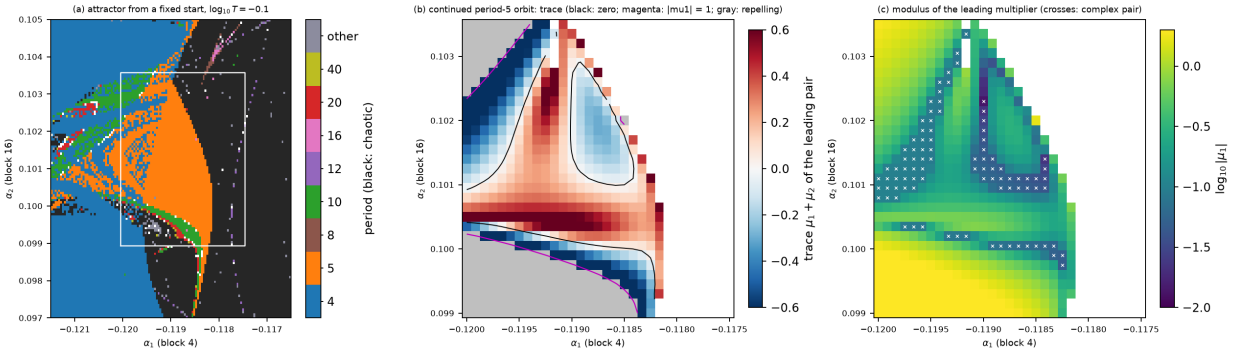


**Figure 64:** A period-5 window in the plane of gratitude at block 4 and hostility at block 16 (Qwen2.5-0.5B-Instruct, float64, $\log_{10} T = -0.1$). (a) Attractor reached from the fixed start on a $128 \times 128$ grid (black: chaotic), with the box of the continuation grid. (b) The window's period-5 orbit continued over the box ($31 \times 31$, 608 cells solved, one token loop): trace $\mu_1 + \mu_2$ of its two leading multipliers on attracting cells, its zero curves (black) and the curves $|\mu_1| = 1$ (magenta); gray cells hold a repelling orbit. (c) Modulus of the leading multiplier; crosses mark a complex leading pair. The modulus never falls below 0.0139; the dark strips, where a one-dimensional map would be superstable, are where the two leading multipliers meet.

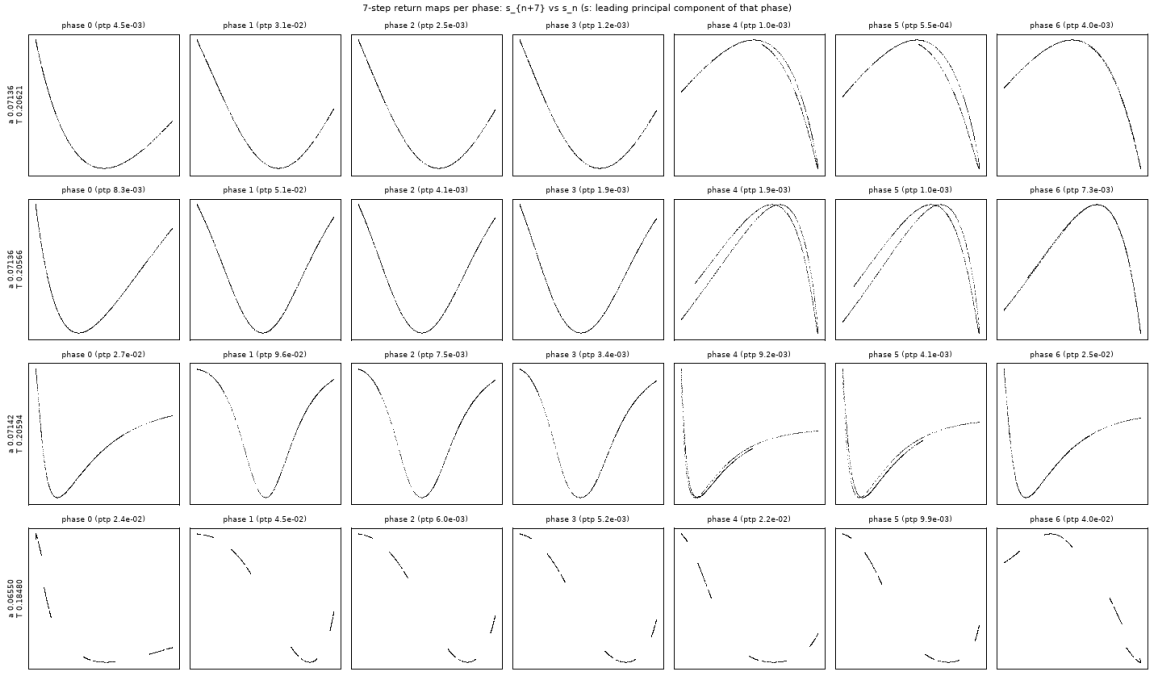


**Figure 65:** Seven-step return maps $s_{n+7}$ against $s_n$, for each phase of the 7-periodic text, of chaotic cells next to the hostile period-7 body (top three rows: $\alpha = 0.07136$–$0.07142$, $\log_{10} T = 0.2057$–$0.2062$) and on the hostile line of Figure 26 (bottom row: $\alpha = 0.0655$, $\log_{10} T = 0.1848$); $s$ is the projection on the leading principal component of that phase's states, which carries 89–100 % of their variance. Binned coarsely (16 intervals), every phase has one interior extremum; finer partitions keep extra extrema, especially in phases 4 and 5, where the points also split into two thin strands.

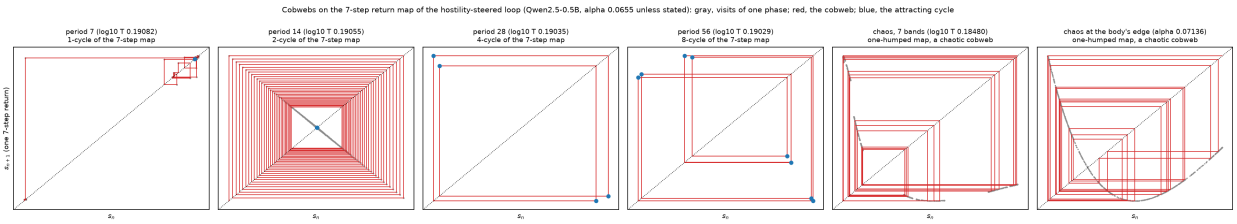


**Figure 66:** Cobweb diagrams of the 7-step return map of the hostility-steered loop (Qwen2.5-0.5B-Instruct, layer 12, float64). $s$ is the projection of one phase's states on their leading principal component. Left four panels: the doubling cascade at the right edge of the hidden-chaos window along $\alpha = 0.0655$. As $\log_{10} T$ falls from 0.19082 to 0.19029, the attracting set of the 7-step map (blue) is a fixed point (period 7 of the full loop), then a 2-, 4- and 8-cycle (periods 14, 28 and 56); the red cobweb shows the approach from the fixed start (for period 7, its first visits). Right two panels: chaotic cells of Figure 65, where the visits trace a one-humped map (gray) and the cobweb wanders over it.

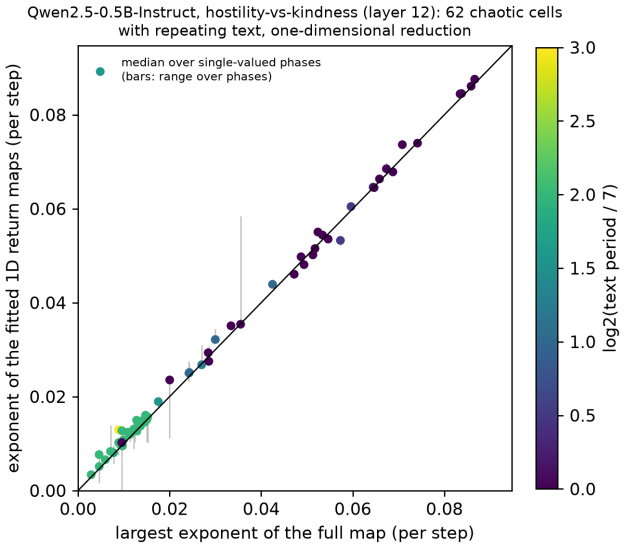


**Figure 67:** Scalar return-map approximation across the hostile cascade (Qwen2.5-0.5B-Instruct, hostility at layer 12, $\alpha = 0.0655$, $\log_{10} T \in [0.176, 0.191]$): for each of the 62 chaotic cells whose leading-token text repeats exactly, the Lyapunov exponent of the fitted return maps of the leading-token probability (per step; median over the single-valued phases of the text, bars: their range; polynomial degree chosen by cross-validation) against the largest exponent of the full map from twin trajectories. Color: text period relative to 7. The line is equality. With seven-token texts the 2000 steps give 285 repetitions; with 28-token texts only 71 or 72 observations per phase (70 or 71 return pairs), and the fitted maps then overestimate small exponents.

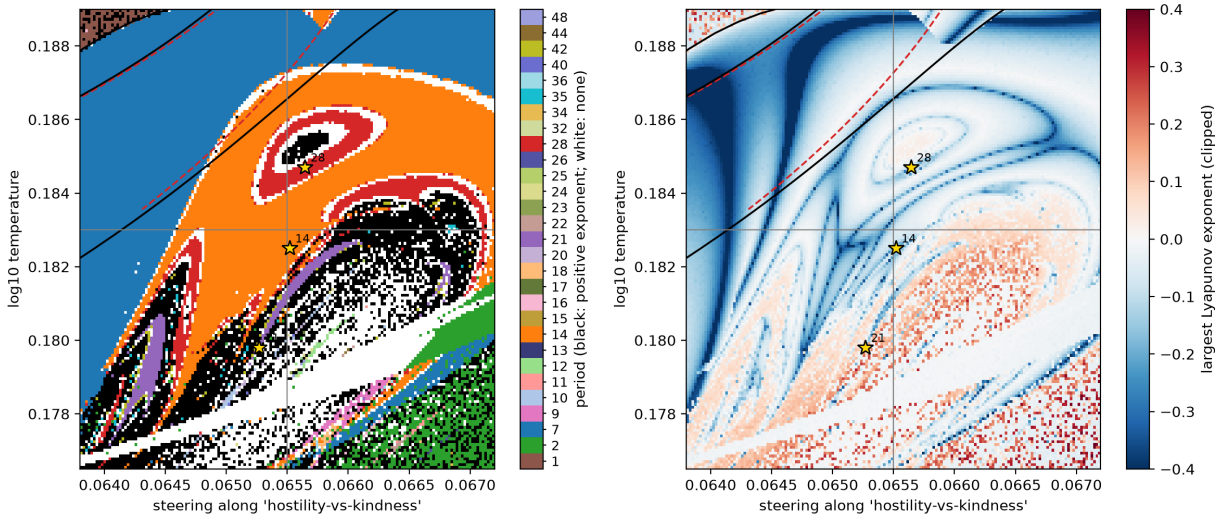


**Figure 68:** The lower part of the period-7 body of the hostility-steered Qwen2.5-0.5B-Instruct map (layer 12) at higher resolution ($160^2$ float64 cells). Left: period of the attractor (black: positive largest exponent; white: no period up to 48). Right: largest Lyapunov exponent (clipped); the darkest curves mark a small leading multiplier (candidate superstable curves). Both panels: float64 fold (black) and flip (red, dashed) curves of the period-7 orbit, the two lines of Figure 26 (gray) and the Newton-verified orbits of periods 14, 28 and 21 (stars).

# G Bridge to sampled decoding

How much of the fold mechanism of Section 8 survives sampling? To find out, we replace the expected embedding by the mean of $m$ sampled token embeddings (Figure 69). With the exact map, laminar phases near the fold of the 2-cycle "is it" last 120 and 63 steps at $\varepsilon = 10^{-5}$ and $3 \times 10^{-5}$. With $m = 64$ they last about 10.6 steps, independently of $\varepsilon$ (57% of steps in the channel), and with $m = 8$ about 7.7 steps (38%). With single samples ($m = 1$, sampled decoding of the same truncated system), essentially no laminar phases remain (11% of steps in the channel). The deterministic intermittency mechanism therefore belongs to the expected-embedding map. Sampling noise turns the bottleneck into a noise-limited trap whose strength grows with $m$.

**Zero-temperature limit and ordinary greedy decoding.** As $T \to 0$ the soft-token map becomes, where the leading token is unique, greedy decoding with a one-token memory, $g(t) = \arg\max_s z_s(\text{prefix}, E_t)$ (at an exact tie the limit averages the tied embeddings). This is a map on the vocabulary, and its cycles are the zero-temperature attractors. For Qwen2.5-0.5B we computed $g$ for all 151 936 tokens. Unsteered, it has 1060 cycles, and one of them, the period-5 loop "![](https:// Hello", drains 86 % of the vocabulary; it is the largest attractor family of every 0.5B soft-token map. Ordinary greedy decoding with a growing context does not inherit these cycles (Table 23). From 220 starts (the first tokens of the 20 largest cycles and 200 random tokens), 19 runs end in a short loop within 256 tokens, and the dominant 5-cycle never appears. Steering along philosophy makes ordinary decoding loop almost always (218 of 220 runs at $\alpha = 0.1$), but in other loops, mostly punctuation such as " –", none of them one-token cycles. Greedy decoding that keeps only the last $K$ tokens interpolates between the two. For the tested $K \geq 2$ most final loops differ from the one-token cycles: at $K = 2$ only 7 of 220 unsteered runs and 1 of 220 steered runs keep one of them. Unsteered, looping collapses to the level of the growing context between $K = 16$ and 32; steered, the share of runs whose loop equals the growing-context loop rises from 0 at $K = 1$ to 58 % at $K = 64$. The soft-token map's low-temperature attractors are therefore those of decoding with a one-token memory. Which loop ordinary decoding enters depends on the context it keeps, but the tendency of steering to drive decoding into loops is shared. In ordinary decoding, repetition is known to reinforce itself [25, 26], a theoretical analysis ties loops to words of high inflow [125], and induction heads, which copy earlier context [126], are one mechanism by which a longer context can favor loops that repeat earlier text.

| | unsteered | | $\alpha = 0.1$ (philosophy) | |
|---|---|---|---|---|
| memory $K$ | looped | loop as with full context | looped | loop as with full context |
| 1 | 220 | 5 | 220 | 0 |
| 2 | 220 | 5 | 220 | 0 |
| 8 | 220 | 5 | 220 | 3 |
| 16 | 169 | 5 | 219 | 24 |
| 32 | 32 | 7 | 219 | 71 |
| 64 | 26 | 11 | 219 | 126 |
| full context | 19 | – | 218 | – |

**Table 23:** Greedy decoding of Qwen2.5-0.5B with a memory of the last $K$ generated tokens after the fixed prompt ($K = 1$ is the soft-token map's zero-temperature limit), 220 starts of 256 tokens each: runs ending in a loop of period up to 64 repeated three times, and runs whose final loop equals that of ordinary decoding with the full context from the same start.

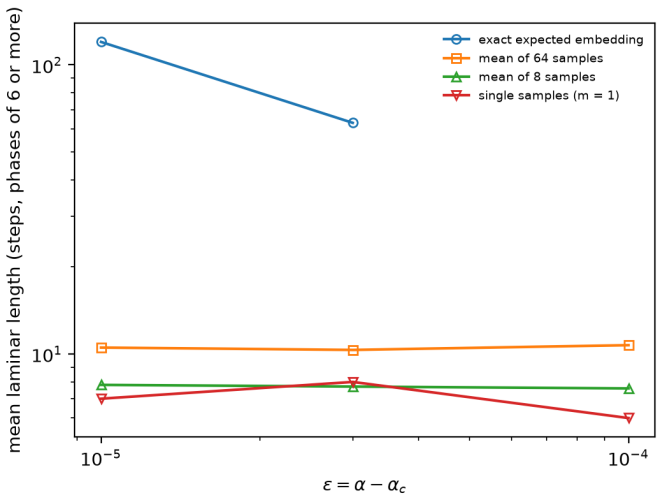


**Figure 69:** Mean laminar length near the fold of the 2-cycle "is it" (Qwen2.5-0.5B-Instruct, philosophy direction at layer 12, $\log_{10} T = -0.115$) against $\varepsilon$, for the exact map and for means of $m$ sampled embeddings.

**A longer fed-back memory.** The one-token window is the main simplification of the map. Feeding back the last $K$ expected embeddings instead, so that the state is a window of $K$ soft tokens at fixed positions after the prompt, we measured 24 temperatures between $\log_{10} T = -0.3$ and 0.6 for $K$ from 1 to 16 (Table 24; twins at $10^{-5}$ and $10^{-7}$ agree within 0.006 at every chaotic temperature). In Qwen2.5-7B the chaos does not vanish but spreads: it is chaotic at 8 temperatures with one token of memory, at 13 with four, and at 21 and 20 with eight and sixteen, nearly the whole range, with smaller exponents (largest 0.96 for $K = 1$, 0.43 for $K = 16$). Qwen2.5-0.5B, chaotic at one temperature with one or two tokens of memory and at none with four, is chaotic at ten with eight. The chaos is therefore not an artifact of the one-token window.

| memory $K$ | 1 | 2 | 4 | 8 | 16 |
|---|---|---|---|---|---|
| Qwen2.5-7B | 8 (0.96) | 10 (1.08) | 13 (0.70) | 21 (0.58) | 20 (0.43) |
| Qwen2.5-0.5B | 1 (0.20) | 1 (0.24) | 0 | 10 (0.31) | 3 (0.23) |

**Table 24:** Chaotic temperatures, of 24 between $\log_{10} T = -0.3$ and 0.6, when the loop feeds back the last $K$ expected embeddings (largest exponent in parentheses); paper's prompt, unsteered, float64, 500 transient and 1000 measured steps, twins at $10^{-5}$ and $10^{-7}$ (chaotic: both positive and no period up to 64).

**Soft thinking with a growing context.** Soft Thinking [1] feeds back the same expected embedding but appends it to the context, so that every earlier soft token stays visible. We ran that decoding in float64 from the paper's prompt and displaced the first soft token of twin trajectories by $10^{-10}$, without renormalization; the distance between the newest soft tokens then shows whether the early perturbation grows. The context grows, so these are finite-time growth rates of a non-autonomous system, not exponents of an attractor. In Qwen2.5-7B the perturbation grows exponentially at temperatures inside the one-token map's chaotic range: by 0.77 to 0.82 per step at $\log_{10} T = 0.17$ and 0.21, reaching $10^{-3}$ within 49 to 58 steps, and it reaches $10^{-3}$ within 400 steps at nine other temperatures between $-0.10$ and 0.40, at 0.02 to 0.18 per step (0.8 at 0.33 for two of three twins). It does not grow at the sharpest distributions ($\log_{10} T \le -0.14$) or at nearly uniform ones ($\log_{10} T \ge 0.44$), where it stays between $10^{-13}$ and $10^{-7}$ for 400 steps. In Qwen2.5-0.5B the growth moves to sharper distributions: it appears at six of the seven temperatures

from $\log_{10} T = -0.30$ to $-0.07$ (up to 0.33 per step) and at 0.09, with a late transient burst at 0.05, and is absent from 0.13 up, which includes its narrow one-token chaotic band. Sensitive dependence therefore survives when the whole context is kept, and in the 7B model the one-token map locates it. Qwen2.5-72B, run the same way on two GPUs, stays nearly insensitive. We count a temperature as growing when two of its three twins reach $10^{-3}$ within 400 steps, a rule fixed before the 72B run and applied afterwards to the earlier 0.5B and 7B records, where it gives 11 of 24 temperatures for the 7B model and 8 for the 0.5B model. The 72B model grows at one of 24 temperatures on the paper's prompt, and only transiently: at $\log_{10} T = 0.09$ the twins pass $10^{-3}$ at step 123 and fall back to $5 \times 10^{-6}$ (at 0.13 one twin of three passes $10^{-3}$ at step 381). It grows at none of the 24 completed temperatures on the held-out prompt with its narrow unsteered band (a planned finer line there was not completed), including $\log_{10} T = 0.326$, between two temperatures where its one-token map is chaotic; there the distance never exceeds $1.1 \times 10^{-9}$. It also grows at none of the eleven steered cells of Appendix I, including the six where its one-token map is chaotic: there the distance never exceeds $3 \times 10^{-7}$ and ends between $1 \times 10^{-13}$ and $6 \times 10^{-10}$, and the growing context holds the next-token entropy at 2.3 to 3.6 nats instead of the one-token map's 7.3 to 11.1. At these 72B prompts and cells, over 400 steps, the growing-context decoder therefore did not reproduce the sustained sensitivity of the fixed-window loop, while the one transient burst shows that the method registers growth at this scale.

## H Replication and scale

In Qwen2.5-1.5B (steering at layer 14 of 28), a coarse $64^2$ float64 map over the range of the 0.5B maps again shows chaotic regions with embedded windows. A $256^2$ zoom (Figure 46) resolves a chaotic band near $\log_{10} T = 0$–$0.13$ (14,422 of 65,536 cells), with a branch descending along $\alpha \approx 0.06$ and periodic windows inside it. The large periodic regions are question loops: "What?\n" (period 2), "\nWhat is a" (period 4) and "What continuum?\n" (period 3). Unlike the 0.5B model, no period-adding fan was resolved in this map.

A cut of 2048 cells at $\alpha = 0.100$ (Figure 70) shows how the band is entered from below. The 2-cycle "What?\n" gives way abruptly to a period-4 loop, and the Lyapunov exponent jumps, which is consistent with a switch between attractors rather than a resolved smooth doubling. The period-4 loop then doubles, with float64 flips at $\log_{10} T = -0.0031269$ (period $4 \to 8$, next modulus 0.014), $-0.0021666$ (period $8 \to 16$, next modulus $8 \times 10^{-5}$), $-0.0019002$ (period $16 \to 32$, next modulus $5 \times 10^{-9}$) and $-0.0018380$ (period $32 \to 64$). Along the way the exponent rises continuously to zero, and chaos follows. The interval ratios are 3.60, 4.28, 4.58, 4.648 and 4.665; the last three use the flips of the period-64, period-128 and period-256 orbits at $\log_{10} T = -0.0018244$, $-0.00182151$ and $-0.00182088$ (next moduli below $3 \times 10^{-14}$). The last ratio differs from Feigenbaum's 4.6692 by 0.0044 (0.1 %); the period-256 flip is located to about $3 \times 10^{-14}$ in $\log_{10} T$, the floor set by float64 parameters. Like those of the 0.5B crescent at $\log_{10} T = -0.148$, the ratios rise toward 4.669. Their higher start does not indicate a temperature trend, since along nearby cuts of the 0.5B crescent the early ratios range from 2.84 to 14.9 (Section 9).

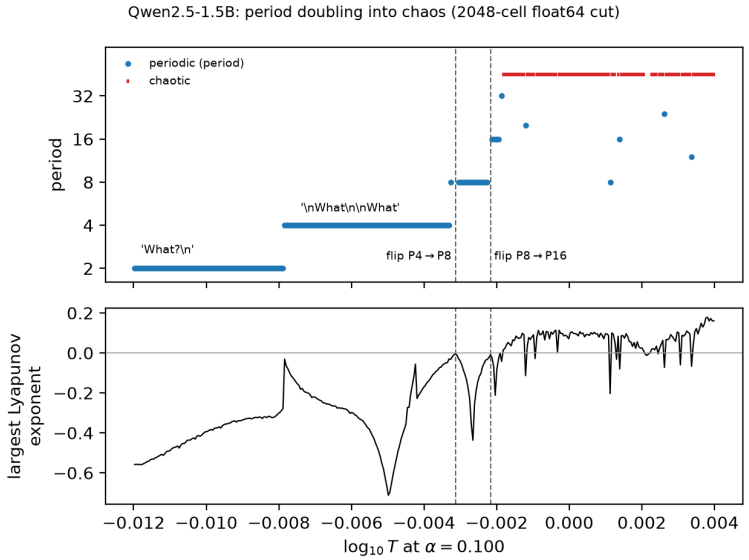


**Figure 70:** Qwen2.5-1.5B soft-token map steered along the philosophy direction at layer 14, along $\log_{10} T$ at $\alpha = 0.100$: period of the attractor reached from the fixed start (top) and largest Lyapunov exponent (bottom). Dashed lines: float64 flip parameters. The doubled loops alternate the number of line breaks between the "What"s.

In Qwen2.5-0.5B, a second steering direction, hostility, reproduces the fold-and-adding mechanism (Section 10).

Qwen2.5-7B (steering at layer 14 of 28, concept vectors built as for the smaller models) shows the same kind of organization in coarse $64^2$ float64 maps (Figure 71). Over the philosophy range used for 0.5B and 1.5B, 8 % of cells have a positive largest exponent, and periods 2, 4, 3 and 11 dominate the periodic cells. Along the hostility direction ($\alpha \in [0, 0.12]$, $\log_{10} T \in [-0.3, 0.3]$), 24 % of cells are chaotic. Bands of period-3, -5 and -6 windows lie in a chaotic sea below $\log_{10} T \approx 0.1$, with high-entropy chaos above, except for a period-3 region at strong steering ($\alpha \gtrsim 0.09$). The windows hold genuine periodic orbits. In float64, Newton's method converges at the most interior period-6 cell to the loop ", shut the end\n\nOh" at $(\log_{10} T, \alpha) = (-0.0143, 0.0476)$ (residual $2 \times 10^{-14}$; spectral radius $1.6 \times 10^{-7}$, nearly superstable), and at the most interior period-3 cell to a period-3 loop at $(0.2524, 0.1143)$ (residual $3 \times 10^{-15}$; leading multiplier $-0.12$). Continued for about an hour each, over $\pm 0.001$ in $\alpha$ and $-0.016$ in $\log_{10} T$ (one float64 continuation step takes about two minutes at 7B), both orbits stay strongly stable without a crossing. Where the coarse map switches from the period-6 loop to the period-3 loop "you better than" (between $\alpha = 0.0495$ and 0.0514 at $\log_{10} T = -0.0143$), both loops are float64 orbits (residuals $7 \times 10^{-15}$ and $1 \times 10^{-14}$), and their continuations overlap. The period-6 orbit stays stable from $\alpha = 0.0476$ up to 0.0507 and the period-3 orbit from 0.0514 down to 0.0475, both with spectral radius below $1.4 \times 10^{-3}$. The two attractors therefore coexist where both continuations are stable, $\alpha \approx 0.0476$ to 0.0507, and within the tested range the map's edge there is the boundary of the fixed start's basin, not a bifurcation. These short continuations located no bifurcation; a period-2 fold of the 7B model is located below.

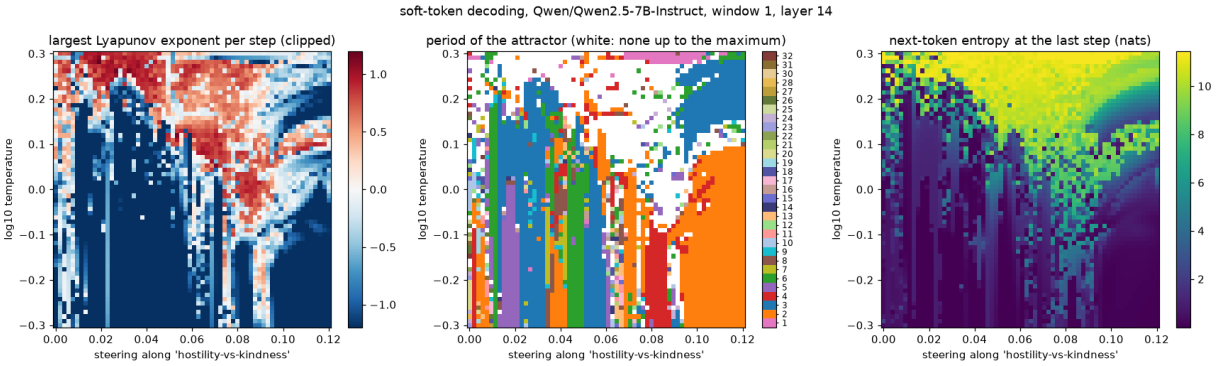


**Figure 71:** Qwen2.5-7B soft-token map steered along the hostility direction (layer 14), $64^2$ float64 cells: largest Lyapunov exponent, period of the attractor reached from the fixed start, and next-token entropy at the last step.

**A second model family.** OLMo-2-1124-7B-Instruct [127] comes from another laboratory, with other data, training and code. Steered at layer 16 of 32, with concept vectors built exactly as for Qwen, it shows the same kind of organization (Figure 72). In $64^2$ float64 maps, 6 % of cells are chaotic along the philosophy direction and 13 % along the hostility direction, in a band near $\log_{10} T = 0.03$–$0.17$ that bends to lower temperatures under strong hostility steering ($\alpha > 0.07$). Below the band the attractor is the 2-cycle "!Hello"; above it, at high temperature, the fixed point "!"; inside it lie periodic windows of periods 4 to 31. Along the hostility direction the largest windows, of periods 8 to 12, are loops of $k$ laps of the 2-cycle "!<|endoftext|>" with a short excursion ("there is an"). Each lap adds two to the period, as each lap of "!Yes" does in the hostile cascade of Qwen2.5-0.5B (Section 10). Whether a fold of that 2-cycle organizes them is not tested: these are coarse pixels, and no OLMo orbit has been continued.

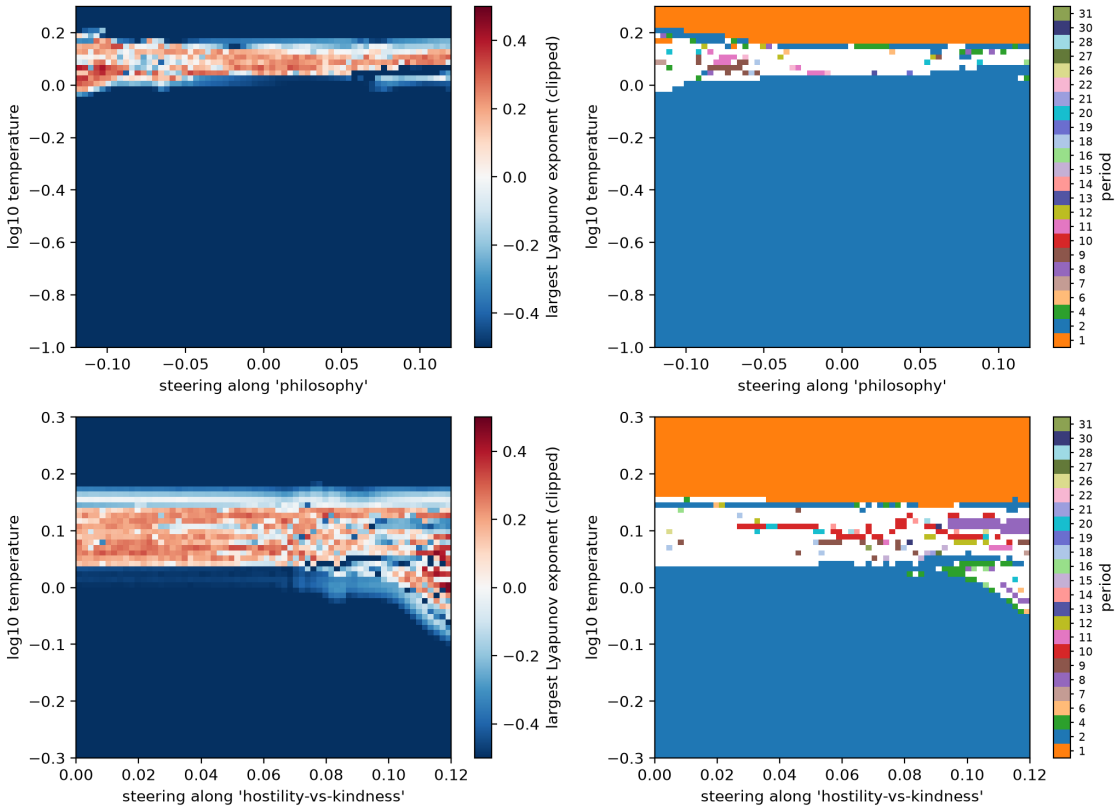


**Figure 72:** OLMo-2-1124-7B-Instruct soft-token maps, $64^2$ float64 cells each, steered at layer 16 along the philosophy direction (top) and the hostility direction (bottom): largest Lyapunov exponent (clipped) and period of the attractor reached from the fixed start (white: no period up to the maximum).

**A third family, read with sparse autoencoders.** Llama-3.1-8B-Instruct [128], with official weights, steering at layer 16 of 32 and vectors built as for the other models, shows the same organization in all three planes (Figure 73). In $64^2$ float64 maps, 8 % of cells are chaotic along gratitude, 12 % along philosophy and 28 % along hostility, with windows of periods up to 32. Its largest loops are greetings between AIs ("-Greetings fellow AI", ". Greetings fellow AI entity detected", period 7). Along hostility, too, the largest loops are greetings and "You", not hostile text. We read 24 of its attractors (the six largest families and the two most chaotic regions of each map) with two sparse autoencoders on the residual stream: one trained on this Instruct model (Goodfire, layer 19 [129]) and one on the base model (TopK, layer 24 [130]). We first checked each one's hook point by its reconstruction of ordinary text. The Instruct-trained autoencoder separates the attractors (their top-15 features overlap by a mean Jaccard index of 0.19 within a steering direction and 0.11 across directions), whereas the base-model autoencoder sees mostly a signature common to every attractor (overlap 0.52–0.86). Both reconstruct the attractors' states less well than ordinary text (median relative error 0.64–0.76 against 0.52–0.56). The readout is therefore descriptive: without interventions it identifies which learned features an attractor occupies, not a mechanism, and since autoencoders trained with different seeds learn different features [131], the features are those of these two autoencoders.

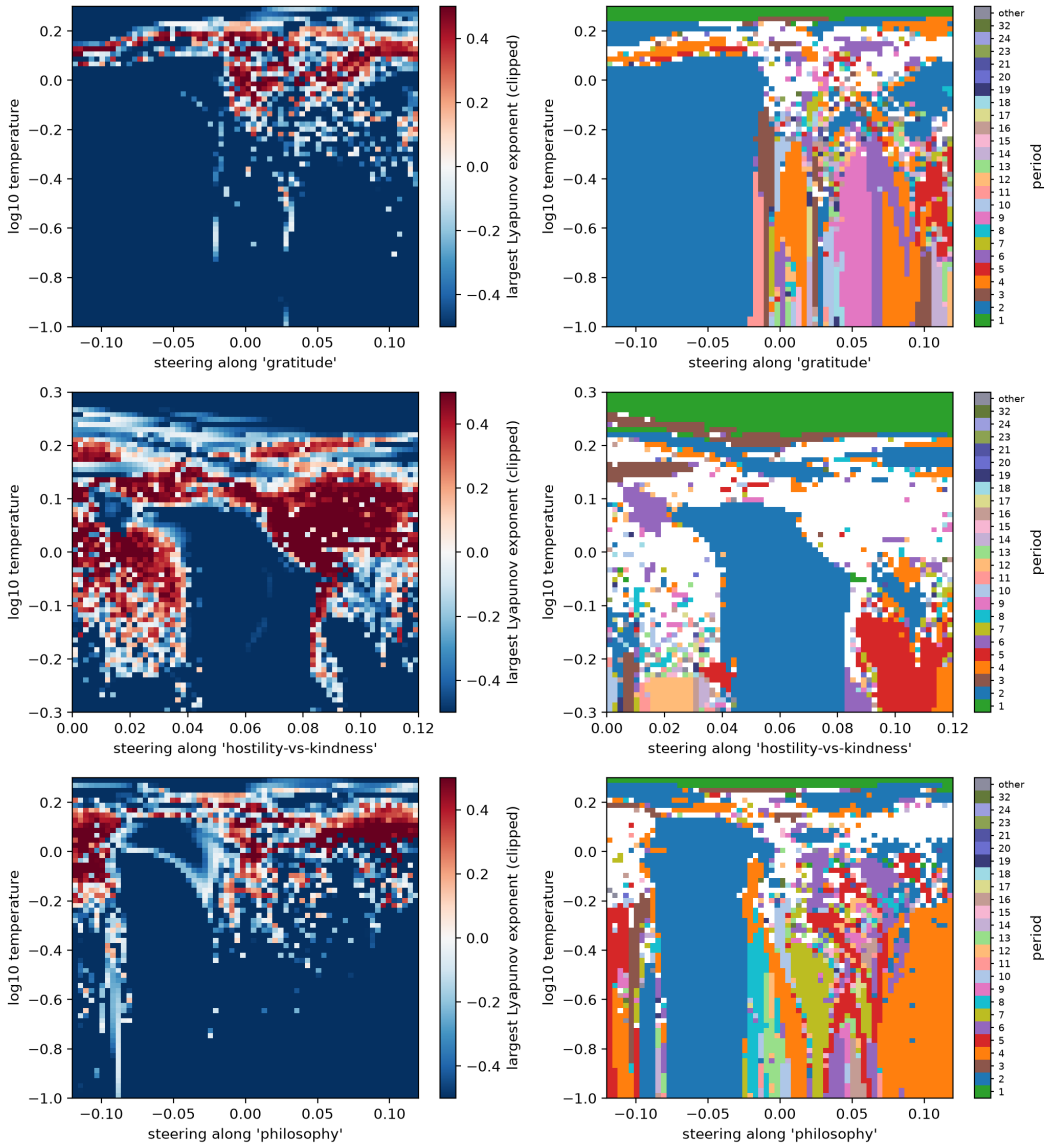


**Figure 73:** Llama-3.1-8B-Instruct soft-token maps ($64^2$ float64 cells, steering at layer 16) along gratitude, hostility and philosophy: largest Lyapunov exponent (clipped) and period of the attractor reached from the fixed start (white: no period up to 32).

Maps of $128^2$ cells (Figure 74) resolve the windows: the hostility plane has 29 % chaotic cells, as at $64^2$, and the philosophy region below the chaotic band is filled with nested periodic tongues of periods 2 to 13.

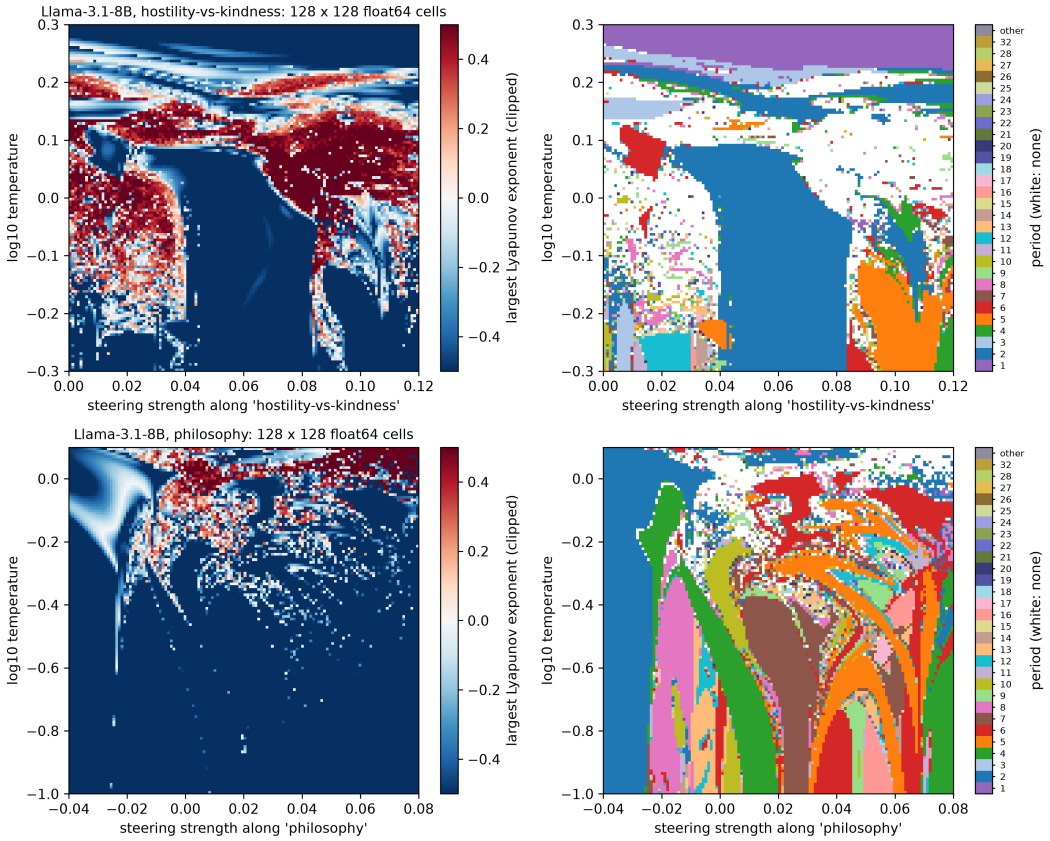


**Figure 74:** Llama-3.1-8B-Instruct soft-token maps steered at layer 16, at $128^2$ float64 cells (each map merged from four $64^2$ tiles on halves of one grid): the hostility plane (top) and the philosophy region of the $64^2$ map's windows (bottom). Largest Lyapunov exponent (clipped) and period (white: none up to 32).

**Same architecture, other weights.** Qwen2-0.5B-Instruct has exactly the architecture and size of Qwen2.5-0.5B-Instruct (24 layers of width 896, the same vocabulary size and rotary base) but was trained on other data with another recipe. Built identically, their $128^2$ float64 maps along gratitude and philosophy (Figure 75) share the gross layout. A large region at low temperature around $\alpha = 0$ is held by one periodic loop, a band of chaos with embedded windows lies near $\log_{10} T = 0$–$0.25$ (4–8 % of cells chaotic in each map), and thin window families run along the flanks. The attractors themselves differ almost completely. Of 416 to 900 distinct loops per map, only 10 occur in both models, all short and generic (".", "!", " you are", " is it"), and they cover less than 10 % of either model's cells. Qwen2's planes are dominated by one period-4 loop, "!<|im_end|>\nHello" (an end of turn followed by a new greeting; 41 and 59 % of cells), and Qwen2.5's by period-5 and period-2 loops ("![](https:// Hello", " you have"). The two checkpoints share the organization of the map; the weights set its content.

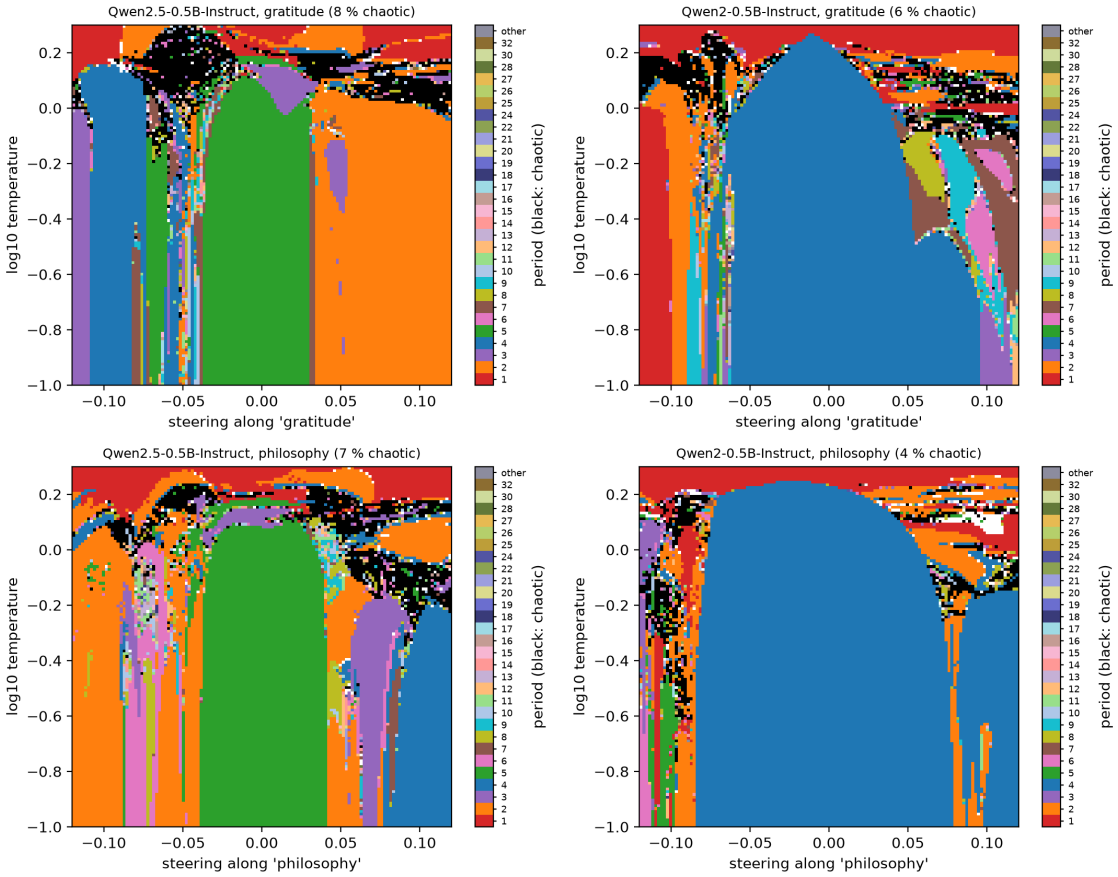


**Figure 75:** Same architecture, other weights: $128^2$ float64 maps of Qwen2.5-0.5B-Instruct (left) and Qwen2-0.5B-Instruct (right) steered along gratitude (top) and philosophy (bottom) at layer 12, with vectors built identically. Color: period of the attractor reached from the fixed start; black: positive largest exponent.

**The fold law at 1.5B and 7B.** We tested whether the mechanism of Section 8, windows accumulating on the fold of a short cycle with $d_N = C/(N + N_0)^2$, recurs in larger models. The criterion, a constant $d_N(N+N_0)^2$ within 10 % over at least four windows for one offset $N_0$, was fixed before the lines were computed; a disclosed correction to the period-progression selector after the first scoring kept the conclusions for the nearest four windows and changed which farther windows were selected. In Qwen2.5-1.5B (philosophy direction, layer 14, $\alpha = 0.058588$) the period-4 orbit folds at $\log_{10} T_c = -0.0912029$ (multiplier 1 to $3 \times 10^{-14}$, next modulus 0.008), with normal-form coefficients $a = -7.16$ per unit $\log_{10} T$ and $b = -21.09$, so $ab = 151.0$. A float64 line of 1700 cells, 1570 of them above the fold, shows windows of periods $4N$ accumulating on it, from single cells at periods 44–64 to a wide period-12 window. Measured in $\log_{10} T$ from $\log_{10} T_c$ to their edges nearest the fold, the four nearest resolved windows (periods 28–40) meet the criterion within 0.12 % ($\delta = -0.99$, $C = 0.0612$). With the windows farther out the spread rises to 10.3–14.0 %; there several periods recur in multiple disconnected runs on the line's $10^{-5}$ grid, and grid-spaced edges no longer identify the fold edges. In Qwen2.5-7B ($\alpha = 0.051429$) the period-2 orbit folds at $\log_{10} T_c = -0.2040156$ (next modulus 0.0092, $ab = 55.7$), and odd windows accumulate on it. The nearest four and five (periods 11–17 and 9–17) meet the criterion within 4.5 %, and six (to period 7) within 6.1 %. Each window's own doubling or tripling lies on its far side, as for the 0.5B windows of periods 16–20; this organization is consistent with fold edges on the near side, and the fitted

distances use grid estimates of those edges. The effective passage fraction $f = \sqrt{Cab}/\pi$ is about 0.97 at 1.5B and 0.78 to 0.81 at 7B, against 0.58 at 0.5B. The fold and its window law thus recur at all three sizes, while $f$, an effective constant that absorbs the global reinjection, differs between the models. With one fold per model, crossed in different coordinates ($\alpha$ at 0.5B, $\log_{10} T$ at 1.5B and 7B), no trend of $ab$ with size can be read.

**A mixture-of-experts model.** Qwen3.5-35B-A3B differs from the dense models in two ways. Thirty of its 40 layers use linear (Gated DeltaNet) attention, with gated full attention in every fourth layer, and each layer routes a token to 8 of 256 experts plus a shared expert, so that about 3B of its 35B parameters are active. Hugging Face computes several parts of this architecture in float32 even when the model is cast to float64 (the normalizations, the delta-rule recurrences, the rotary tables and the router softmax), and some tensors are stored in float32; we patch these paths, restore the stored tensors exactly, and disable the thinking block that the default chat template opens (a first run with the block open is kept in the research log). Steered at layer 20, the map behaves unlike those of the dense models. Unsteered, 128 temperatures over $\log_{10} T \in [-1, 0.3]$ give no positive exponent (largest $-0.265$): periodic loops at all but 15 temperatures ("!Hello" with period 2 at 92 of them, other periods up to 52), and the remaining 15, above $\log_{10} T \approx 0.1$, contract without a detected period. Along philosophy, none of 1024 cells is chaotic (largest exponent $-0.112$). Along hostility, 52 of 1024 cells (5.1 %) have a positive exponent and no period, against 28 % for Llama-3.1 8B on the same plane. Routing is discontinuous: a twin trajectory that crosses a routing boundary jumps, which can inflate a finite-difference exponent, so we call these cells irregular rather than chaotic.

Two dense models of the same family, Qwen3.5-4B and Qwen3.5-9B (32 layers each, 24 of them linear attention), test whether the architecture causes the contraction. With concept vectors at their middle layer (16 of 32) and the same ranges, transients and maximal periods, the 4B model is chaotic at 19 of 128 unsteered temperatures (largest exponent 0.79), at 153 of the 1024 philosophy cells (0.84) and at 323 of the 1024 hostility cells (0.89). The 9B model is chaotic at 10, 73 and 161 (0.48, 0.68 and 0.75; Figure 76). The hybrid attention therefore does not prevent chaos. The routing-aware version of the stack resolution (Appendix B) follows a third row whose routing is frozen to the base orbit's. At the twin offset $10^{-7}$, neither mixture of experts switched an expert in any layer at any step, and the frozen row's network factor equals the free twin's. At every knockout temperature, the first attention layer (a linear-attention layer) is the largest amplifier in all three Qwen3.5 models. At the knockout temperature where the entropy is 2 to 4 nats, removing it lowers the network factor by 1.27 (4B), 1.33 (9B) and 0.76 nats (the mixture of experts). Removing the first MLP or expert layer lowers it by 0.92, 0.77 and 0.24.

OLMoE-1B-7B stores its experts in bfloat16. We convert each expert's weights to float64 when it is used, which is exact, compute the router softmax in float64, and cast everything else to float64; central differences of the map then converge as $h^2$. Its unsteered sweep of 130 temperatures over $\log_{10} T \in [-1, 1.2]$ has one temperature with a positive exponent and no period (0.023, irregular), and 7 with neither a detected period nor an exponent above $10^{-3}$. Its median network factor between 0.3 and 6 nats ($-0.36$) lies between those of the dense OLMo-2-1B ($+0.11$) and OLMo-2-7B ($-0.52$). OLMoE normalizes before each sublayer and OLMo-2 after it, so this pair differs in more than the experts, and we read no size effect from it.

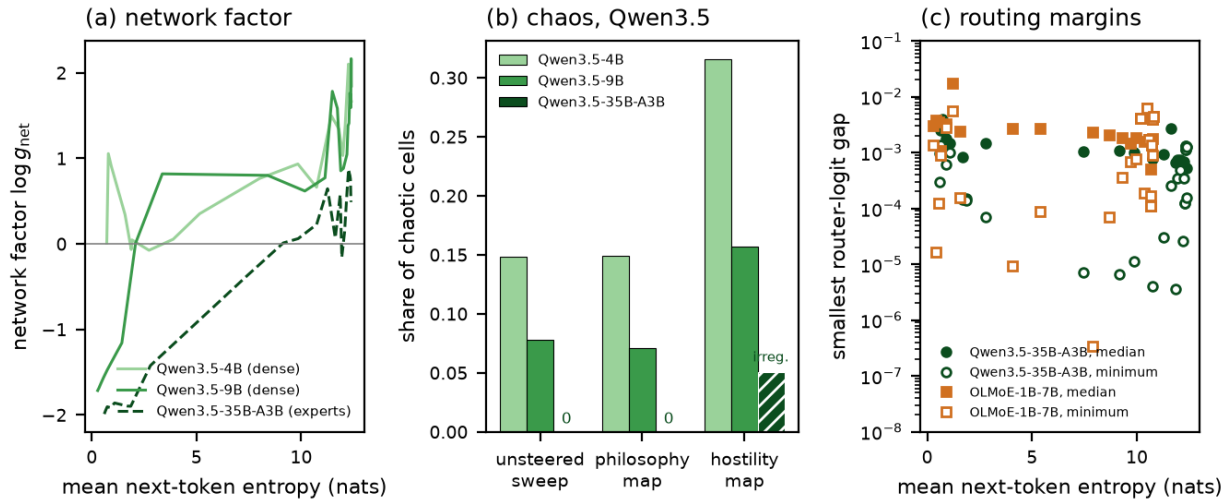


**Figure 76:** Mixtures of experts against dense models of the same family. (a) Network factor against the mean next-token entropy on the orbit, unsteered loop, 24 temperatures per model, float64 (as in Figure 48), for Qwen3.5-4B and -9B (dense) and Qwen3.5-35B-A3B (mixture of experts, about 3B of 35B parameters active per token). (b) Share of chaotic cells (by the criterion of Appendix B) in the unsteered sweep (128 temperatures, $\log_{10} T \in [-1, 0.3]$) and in $32 \times 32$ maps steered along philosophy and hostility at the middle layer; the mixture of experts' hostility cells (hatched) are called irregular, since routing jumps were not excluded when that map was computed. (c) Routing margins along the unsteered orbits of both mixtures of experts, Qwen3.5-35B-A3B and OLMoE-1B-7B (24 temperatures each, as in (a)): per temperature, the median over steps (filled) and the minimum (open) of the per-step smallest gap between the eighth and ninth largest router logits over all layers. A switch requires closing this pairwise logit gap; a bound below half the gap on every logit's change prevents it. A twin at relative offset $10^{-7}$ never switched an expert.

# I Chaos and model size: further results

This appendix completes Section 14: the 70B-class models and their precision check, cheap predictors of the chaos, steering at 70B, and the supporting figures.

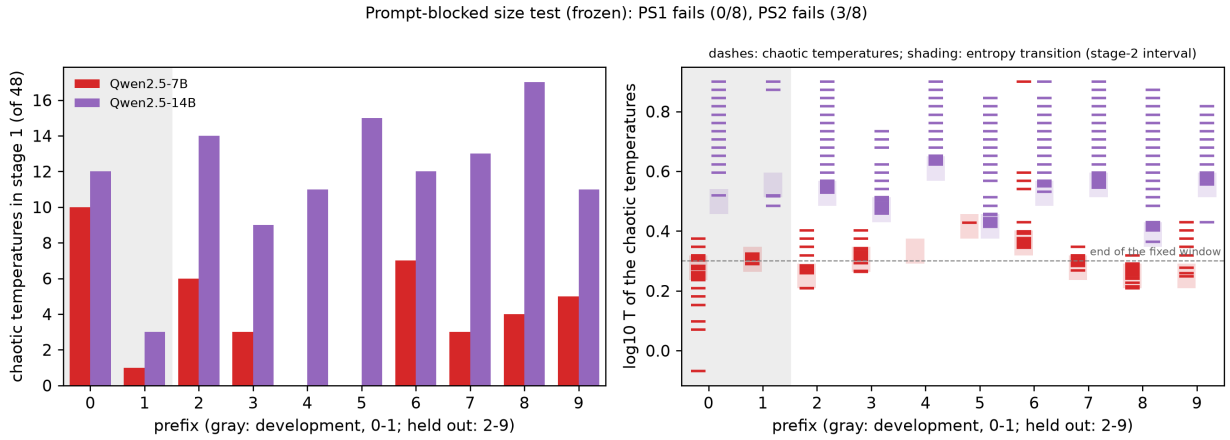


**Figure 77:** Prompt-blocked size test (frozen before any run), Qwen2.5-7B and -14B on ten prompts (gray: development). Left: chaotic temperatures among 48 over $\log_{10} T \in [-0.4, 0.9]$, the primary endpoint. Right: where the chaotic temperatures lie (dashes; both stages), with each model's entropy transition, the interval of its largest entropy increase (shading). Chaotic: exponents above $10^{-3}$ at both twin offsets ($10^{-5}$, $10^{-7}$) and no period up to 64; 1000 transient and 2000 measured steps, float64.

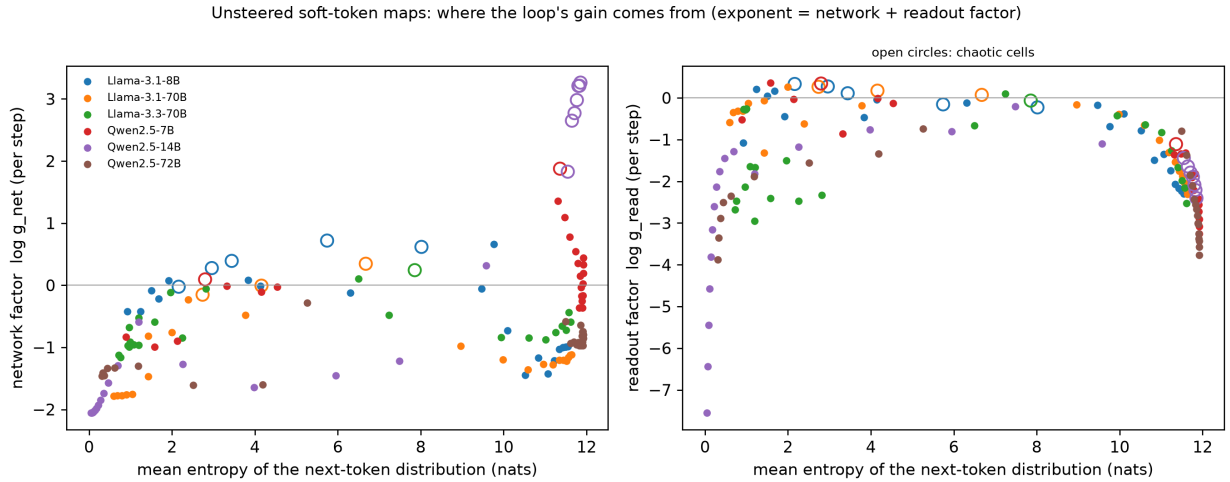


**Figure 78:** Gain split of the unsteered loop (Section 3) at 24 temperatures per model (500 transient and 1000 measured steps, relative twin offset $10^{-6}$): network factor (left) and readout factor (right) against the mean next-token entropy on the orbit; open circles: chaotic temperatures. The two factors add up to the largest exponent up to a boundary term. Medians per entropy bin are given in Section 14.

**At 70B, unsteered chaos is rare, and a precision defect made part of it spurious.** The regular grids of the 70B-class models find little unsteered chaos: Qwen2.5-72B has no positive exponent at any of 191 temperatures between $\log_{10} T = -1$ and 1.2, Llama-3.3-70B none in $[-1, 0.3]$, and Llama-3.1-70B three temperatures in $[-1, 0.3]$. Finer lines found candidates: a window of

positive exponents at Qwen2.5-72B's entropy jump ($\log_{10} T = 0.3728$–$0.376$) and two isolated temperatures of Llama-3.3-70B (0.250, 0.306), all at the single twin offset $10^{-6}$. The window failed a three-offset test: the exponent is negative at all 64 temperatures of the window at $10^{-5}$, near zero at $10^{-6}$, and positive at 60 of the 64 at $10^{-7}$, including four temperatures whose state repeats with a period, which no stable periodic orbit allows; in a repeat it is negative at all 16 temperatures at $10^{-4}$, $3 \times 10^{-5}$ and $10^{-5}$. The growth of small perturbations came from our computation, whose two-GPU runs computed the final normalization in float32 (see the start of Section 14); a controlled reproduction of this false chaos is in Appendix B (Figure 54). Recomputed in float64 throughout, the window's orbits have periods 2 and 4, and their exponents are negative at all four offsets from $10^{-4}$ to $10^{-7}$ and for an automatic-differentiation tangent vector carried along the orbit by forward-mode differentiation, which needs no offset; the four twin exponents lie within 0.015 of the tangent exponent at every temperature, and the exponent approaches zero only where the period doubles from 2 to 4 ($\log_{10} T = 0.374$). The selected cells below kept their labels at the larger offsets we tested; this is a finite check, not a qualification of every cell of the original maps. In the steered Llama-3.3-70B maps below, twelve randomly drawn chaotic cells are chaotic at offsets $10^{-4}$, $10^{-5}$ and $10^{-6}$ alike, with exponents that agree within 0.052, and the drawn periodic and unresolved cells stay negative at all three; on one GPU, the exponents at $10^{-7}$ and $10^{-5}$ agree within 0.021 at every chaotic temperature of the prompt-blocked test. The same test on Llama-3.1-70B's three unsteered chaotic temperatures confirms two of them ($\log_{10} T = 0.136$ and 0.198; exponents 0.23 to 0.26 and 0.40 to 0.41 at the three offsets) and rejects the weakest (0.116; positive only at $10^{-6}$), so unsteered chaos exists at 70B, if rarely. Two Qwen2.5 models are chaotic far above the fixed window on the paper's prompt, where the next-token distribution is nearly uniform: the 1.5B model at 55 of 224 temperatures, between $\log_{10} T = 0.28$ and 1.04, and the 14B model at 53, between 0.51 and 1.15 (exponents up to 1.14), at mean entropies up to 11.9 nats against $\log V = 11.93$. The other models of the series are not chaotic above $\log_{10} T = 0.6$. For the 1.5B model a longer test (3000 measured steps) at twin offsets $10^{-5}$ and $10^{-7}$, at 12 temperatures from 0.288 to 0.58, finds 9 chaotic and 3 periodic, with the two exponents agreeing within 0.003 at every temperature; one of the periodic ones ($\log_{10} T \approx 0.394$) has positive exponents at both offsets, a contradictory label that we report as returned. On these sampled trajectories the upper sweeps become non-chaotic above about $\log_{10} T = 1.1$ in these two models; we did not locate the uniform contraction that Section 3 proves for large enough temperature.

**Can a cheap property predict it?** Motivated by the saturation and high-temperature limits of Section 3, we tested the breadth of intermediate entropy as a heuristic predictor: a model whose next-token distribution jumps from sharp to flat over a small range of temperature might leave little room for chaos. The breadth of this intermediate regime, the decades of $\log_{10} T$ in which the mean entropy on the orbit lies between 1 and 10 nats, ranges from 0.014 (Qwen2.5-72B) to 0.69 (OLMo-2-32B). It orders the fifteen models' chaotic length (Spearman +0.55) somewhat better than their parameter count does (−0.44; Figure 47, right), but it misses the chaos of Qwen2.5-1.5B and -14B at nearly uniform distributions, above its 10-nat bound. This analysis was adapted after the OLMo-2-32B result, and the breadth is measured on the loop's own orbits, which chaos itself spreads, so the test is partly circular. A loop-free version, frozen before it was run (`docs/start-state-predictor.md`), uses one forward pass per model and prompt: the entropy profile of the logits at the loop's start state, and the one-step gain there. Its primary prediction fails: the start-state breadth on the paper's prompt orders the fourteen dense models' chaotic length with Spearman +0.30, below the frozen threshold of 0.5. The secondary criterion, its median over ten prompts, narrowly passes on the frozen outcome (+0.52; $p = 0.06$) and weakens on the expanded sweeps (+0.44), and the

one-step gain at the start state is negative in every model, the most chaotic ones included ($-0.5$ to $-3.4$ per step), and orders nothing ($-0.32$). These features ran on two GPUs before the precision fix, which changes them only at about the $10^{-7}$ level. We have not established a reliable predictor from a single forward pass: as for the period-8 orbit of Section 3, it has to be measured on the loop.

**Steering at 70B.** Under steering, the 70B maps show chaos, rarely and not independently of the direction (Figure 79; labels at the single offset $10^{-6}$, which the plateau test above supports for this computation). On Llama-3.3-70B's hostility plane, at the layer of Goodfire's 70B SAE and at equal norm, 4.3 % of cells are labeled chaotic along the concept vector, 3.5 % along the frozen-rule hostility feature, 1.1 % along a Gaussian direction and 0.2 % along a random live feature, against 28, 29, 39 and 27 % for the same four directions in Llama-3.1-8B (on one GPU); Qwen2.5-72B along hostility gives 0.8 %: eight of its 1024 cells, all at $\log_{10} T = 0.26$–$0.30$. Recomputed in float64 throughout, six of the eight are chaotic, with automatic-differentiation tangent exponents of 0.23 to 0.36 that the twins at all four offsets from $10^{-4}$ to $10^{-7}$ reproduce within 0.01; five have nearly uniform next-token distributions (11.0 to 11.1 nats) and one alternates between sharp and flat behind a period-2 leading token. The same temperatures without steering are period-2 orbits with exponents between $-3.8$ and $-3.6$, and the steered cells above $\log_{10} T = 0.325$ are near-uniform fixed points, so steering drives Qwen2.5-72B into chaos too, in a narrow band. The chaotic cells of the hostility directions lie on a ridge that steering moves from $\log_{10} T \approx 0.3$ to 0.1. A $128 \times 128$ zoom of the concept plane at the same offset, computed after the precision fix in sixteen bands with identical vectors and joined (Figure 49; $\alpha \in [0.06, 0.12]$, $\log_{10} T \in [0.12, 0.27]$), resolves it: a chaotic band (3410 of the 16,384 cells, 20.8 %; largest exponent 0.64), threaded by periodic windows, whose center steering moves from $\log_{10} T \approx 0.23$ at $\alpha = 0.06$ to $\approx 0.19$ at $\alpha = 0.12$; fixed points lie above it, and windows of periods 3, 5, 6 and 7, up to 13, fill the plane below. Only 1.7 % of the cells have neither a detected period nor a positive exponent. A plateau test of 24 cells drawn by a rule fixed in advance (12 chaotic, 6 periodic, 6 unresolved; 300 transient and 300 measured steps, absolute twin offsets $10^{-4}$, $10^{-5}$ and $10^{-6}$ and an automatic-differentiation tangent) confirms 11 of the 12 chaotic labels, whose four exponents agree within 0.012, and 5 of the 6 periodic ones. The two exceptions are neighboring cells near $\log_{10} T = 0.20$ where a long, weakly attracting loop (periods 15 and 16) and chaos are reached from the same start depending on rounding: one cell labeled chaotic reached the loop, and one labeled periodic reached chaos. The six unresolved cells have small negative exponents ($-0.005$ to $-0.03$) and no period up to 32. An earlier $64 \times 64$ zoom of the same window, computed before the fix, had 44 % such cells and, above the band, 515 cells with periods from 3 to 32 but a constant leading token, an artifact of the period test at that computation's noise floor; Figure 49 supersedes it.

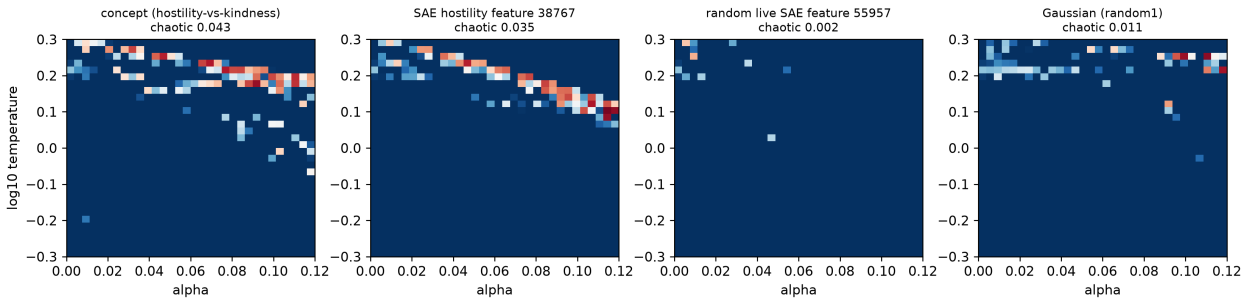


**Figure 79:** Steering controls at 70B: Llama-3.3-70B-Instruct soft-token maps ($32^2$ float64 cells, 300 transient and 300 measured steps, maximum period 32) steered after zero-based block 50, the hook point of Goodfire's 70B sparse autoencoder, along the hostility concept vector, the autoencoder's hostility feature selected by a rule frozen before any map, a random live feature and a Gaussian direction, all at the same norm. Chaotic cells: 44, 36, 2 and 11 of 1024 (concept, feature, random feature, Gaussian); cells with neither a period nor a positive exponent: 468, 358, 223 and 424.

# J Unsteered chaos and steering controls

Steering adds a fixed vector to the residual stream, so chaos along a steering axis could belong to the push rather than to the model. At $\alpha = 0$, however, the map is the unsteered model's own feedback map, with temperature as its only parameter. The $\alpha = 0$ columns of the hostility maps contain cells with positive finite-horizon exponents in Llama-3.1 8B (26 of 64 temperatures), Qwen2.5-7B (15 of 64) and OLMo-2 7B (11 of 64), while the near-zero columns of the 0.5B and 1.5B maps contain one such cell each (of 128 and 64). A longer float64 sweep of the unsteered 0.5B map (512 temperatures over $\log_{10} T \in [-1, 0.3]$, 1000 transient and 2000 measured steps) finds a narrow chaotic band at $\log_{10} T \approx 0.15$–$0.21$ (7 temperatures, exponents up to 0.28), with a period-5 loop at 437 of the 512 temperatures. The same long sweep finds 96 chaotic temperatures in Llama-3.1 8B, between $\log_{10} T = -0.20$ and 0.24 (exponents up to 0.66), interleaved with periodic windows of periods 2 to 52; within $\log_{10} T \in [-0.3, 0.3]$ its chaotic share, 41 %, equals that of the coarse column. Qwen2.5-7B has 65 chaotic temperatures between $\log_{10} T = -0.07$ and 0.28 (exponents up to 0.74), and OLMo-2 7B has 32 between 0.04 and 0.14 (up to 0.30). Steering is therefore not needed to reach chaotic regimes in any of these four models; where it does create chaos, the growth it adds along recorded orbits comes mainly from the readout, where next tokens compete (Section 3). Temperature alone produces chaos with embedded windows, broadly in the 7B and 8B models and in a narrow band in the 0.5B model (Figure 80). Across the fifteen models of Section 14, the regular-grid sweeps find unsteered chaos in eleven of the fourteen dense models (in Llama-3.1-70B at two temperatures that pass a three-offset test), but not in Qwen2.5-72B, Llama-3.3-70B, OLMo-2-13B or the mixture of experts; finer lines found candidates in the first two, and the Qwen2.5-72B window, recomputed in float64 throughout, is periodic.

Steering does widen the chaotic regions, but not as a property of the concept: along norm-matched random directions, the 0.5B maps are as chaotic as along the concept directions (Figure 81). On the same $128^2$ grid, 7.6, 8.3 and 12.5 % of cells are chaotic for three Gaussian directions with the philosophy vector's norm, against 6.8 % for philosophy and 7.5 % for gratitude. In all five maps the chaotic share rises from about 1 % at $|\alpha| < 0.01$ to between 5 and 22 % at larger $|\alpha|$, and a chaotic region at high temperature, with windows reaching down, recurs. In this model, chaos under steering is therefore a generic response to perturbing the residual stream at this norm. Rotating the steering direction makes the same point continuously: along the great circle from one Gaussian direction to

another, 90° away, at constant norm, the chaotic regions move and change shape, but the chaotic share stays between 13 and 24 % at every one of 103 angles (Figure 9; a video of the rotation is in the supplementary material). Single neurons behave the same way. Steering along the output direction (Figure 82) of one MLP neuron of the steered layer (its column of the down-projection, rescaled to the same norm; adding it is the same as raising that one neuron's activation by a fixed amount for every token of the input: by 37.4 at $|\alpha| = 0.12$ for the neuron most specific to philosophy, whose mean activation on the philosophy texts is 0.27) gives 9.9 % chaotic cells for the neuron most specific to philosophy on held-out texts, chosen like the autoencoder feature below by a rule fixed before any map, 5.1 % for its index neighbor and 12.9 % for a random neuron (Figure 83); near $\alpha = 0$ the share is 0.4 to 1.2 %. The direction does select the texts. The largest attractor family in all five maps is the unsteered period-5 loop, but beyond it only 26 to 56 % of one map's cells carry an attractor text that appears anywhere in another map. Llama-3.1 8B agrees. On its hostility plane, two norm-matched random directions at the same layer give 26 and 17 % chaotic cells against 28 % along the concept direction; all three carry 34 to 44 % near $\alpha = 0$, and the random directions thin out at large $|\alpha|$. At layer 19, where a sparse autoencoder trained on this model reads the residual stream [129], the concept vector rebuilt there gives 28 %. The decoder direction of the autoencoder feature most specific to hostility on held-out texts (chosen by a rule fixed before any map; cosine 0.10 with the concept vector) gives 29 %, a random live feature 27 % and a Gaussian direction 39 %, all at the same norm. In this model, chaos therefore occurs along autoencoder-feature, contrastive and random directions alike, with direction-dependent prevalence; at 70B the directions differ more (Appendix I).

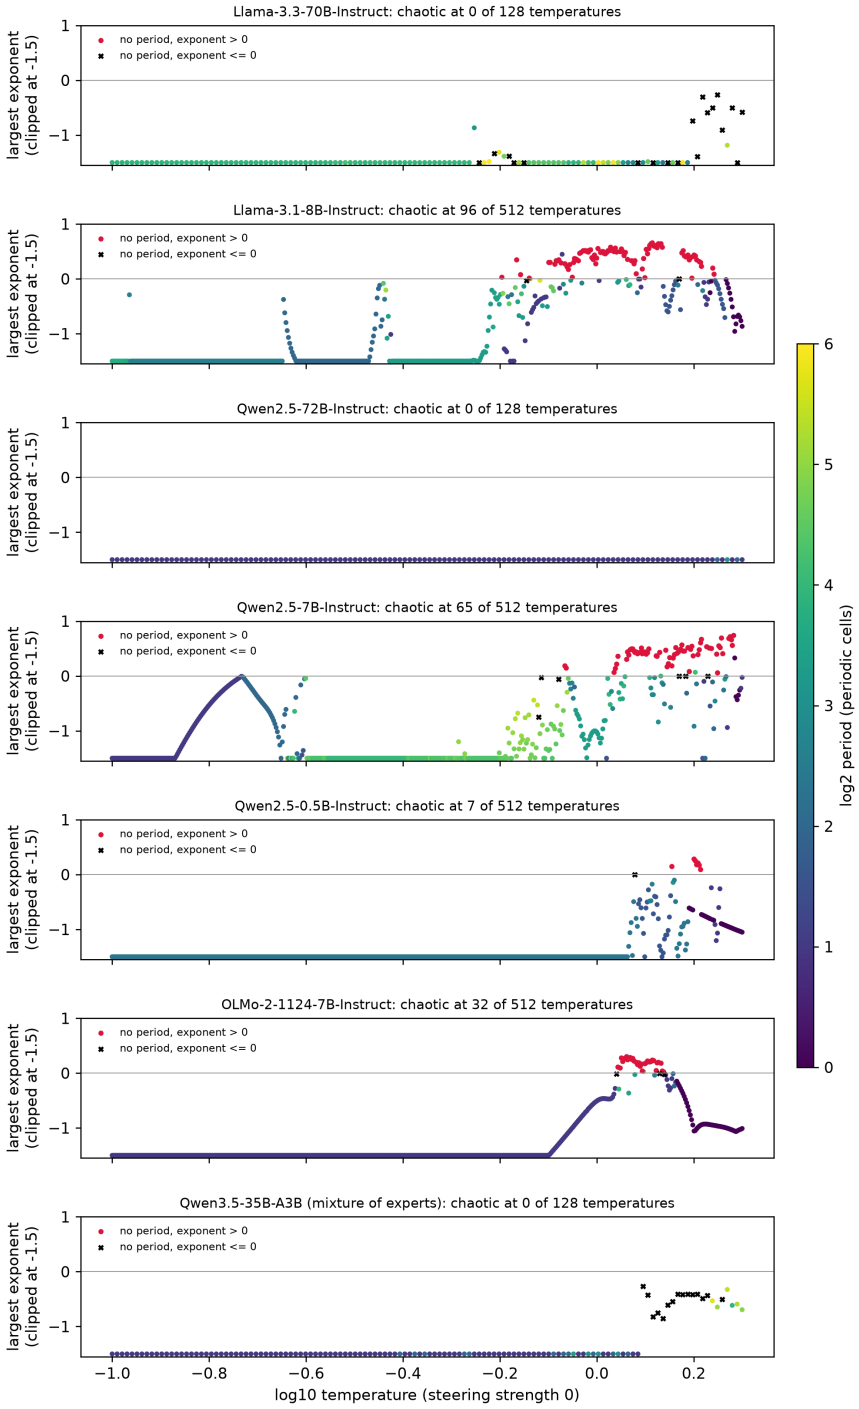


**Figure 80:** The unsteered soft-token map ($\alpha = 0$) along temperature, top to bottom: Llama-3.3-70B-Instruct, Llama-3.1-8B-Instruct, Qwen2.5-72B-Instruct, Qwen2.5-7B-Instruct, Qwen2.5-0.5B-Instruct, OLMo-2-1124-7B-Instruct and the mixture of experts Qwen3.5-35B-A3B. Largest Lyapunov exponent (clipped at $-1.5$) from float64 sweeps of 512 temperatures (128 for the 70B-class and mixture-of-experts models; 1000 transient and 2000 measured steps). Red: no period up to 64 and an exponent above $10^{-3}$; black crosses: neither a detected period nor a positive exponent (unresolved); other points have a detected period, colored by $\log_2$ of the period. Table 18 summarizes these and the wider sweeps of the other models.

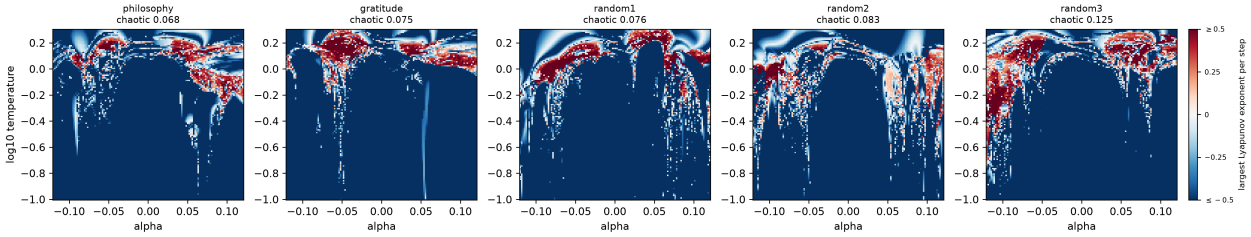


**Figure 81:** Steering controls in Qwen2.5-0.5B-Instruct ($128^2$ float64 cells, steering at layer 12, one grid and one set of settings): largest Lyapunov exponent along the philosophy and gratitude directions and along three Gaussian directions rescaled to the philosophy vector's norm. Titles give the chaotic share (finite-horizon exponent above $10^{-3}$, no period up to 48); color gives the exponent, clipped at $\pm 0.5$.

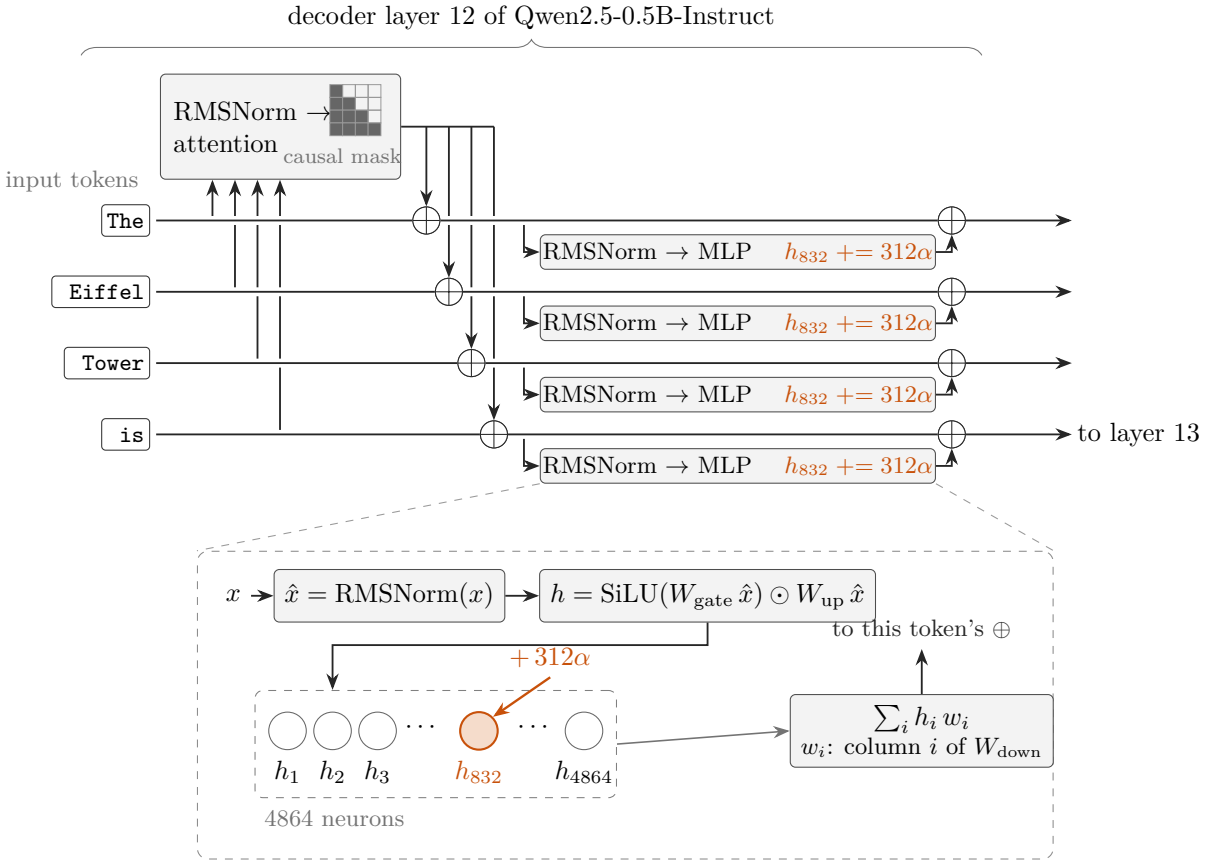


**Figure 82:** Steering along one MLP neuron, in decoder layer 12 of Qwen2.5-0.5B-Instruct. Each token has its own residual stream, one 896-dimensional vector per token, and its own pass through the same MLP; attention, with its causal mask, is the only step that mixes tokens. Inside every MLP box (bottom, for one token with residual vector $x$), the 4864 neurons write $\sum_i h_i w_i$ into the stream, neuron $i$ along its own column $w_i$ of the down-projection. The steering strength $\alpha$ is a scalar we set (negative values lower the activation), and $312 = \|v_{\mathrm{phil}}\|/\|w_{832}\| = 188.99/0.606$ is a fixed scale for neuron 832. Raising $h_{832}$ by $312\alpha$ for every token is the same as adding $\alpha v$, with $v = 312\, w_{832}$, to the layer's output, which is how we implement it: $\sum_i h_i w_i + 312\alpha\, w_{832} = \sum_{i \neq 832} h_i w_i + (h_{832} + 312\alpha)\, w_{832}$. At $|\alpha| = 0.12$ the increase is 37.4, against a mean activation of 0.27 on the philosophy texts; for neurons 833 and 4137 the scale is 329 and 346. The tokens shown are only an example: in the loop, the input is the fixed prompt followed by the fed-back soft token.

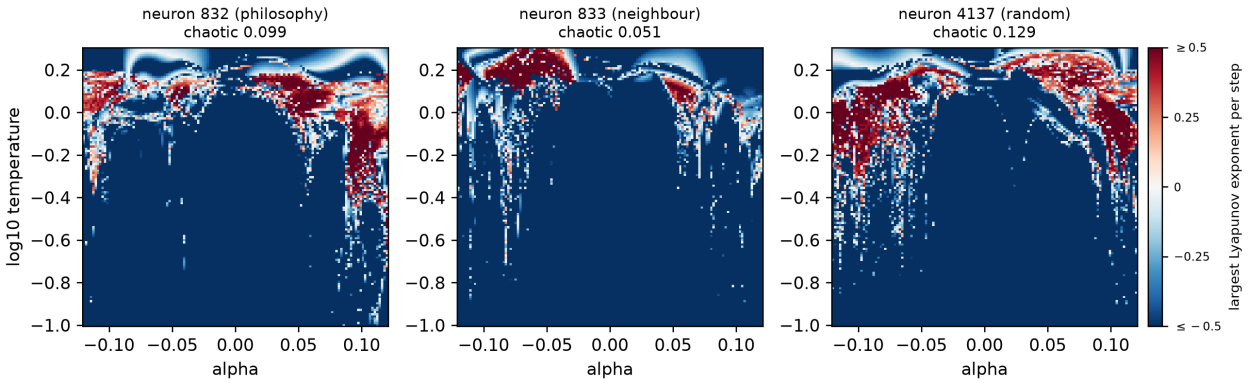


**Figure 83:** Steering along single MLP neurons in Qwen2.5-0.5B-Instruct (same grid, settings and color scale as Figure 81): the output directions of the layer-12 neuron most specific to philosophy on held-out texts (832), of its index neighbor (833) and of a random neuron (4137), each rescaled to the philosophy vector's norm (cosines with it 0.013, −0.028 and 0.022). Titles give the chaotic share.

**The prompt.** Every 0.5B result above uses one prompt, so we mapped (run PV, `tools/pv_summary.py`) the standard plane ($\alpha$ from $-0.12$ to 0.12, $\log_{10} T$ from $-1$ to 0.3; $128 \times 128$ float64 cells, philosophy direction at layer 12) under 22 variants (Figure 84): each of its two parts alone, and neither (Qwen's default system prompt, which the chat template inserts when none is given); the system prompt's words in two random orders, the user message's two tokens reversed, and both changes together; an opposite system prompt; happy and sad versions of the system prompt and of the user message; the same texts without chat markup, a system prompt three times as long and a two-turn conversation; three prompts that are a single random vector, with no text at all (a Gaussian direction at the median embedding norm, the embedding of a random token, and a Dirichlet(0.1) mixture of the embeddings of 64 random tokens); and the base prompt with the loop started from three random vectors. Every prompt we tested gives chaos with periodic windows: 5.9 to 14.9 % of the plane is chaotic (7.0 % for the base prompt), with largest exponents of 0.62 to 0.85 per step (here chaotic means a largest exponent above $10^{-3}$ alone; this finite-window indicator overlaps a detected period at 3 to 18 cells per map). Removing the user message doubles the chaotic share, and even a prompt that is one random vector gives 8 to 10 %. In every prompt we tested, chaos and periodic windows appear, but the prompt decides where they lie: the chaotic cells of each of the other 18 prompts overlap those of the base prompt by 1 to 37 % (Jaccard index). For the three random starts, the chaos/non-chaos threshold labels agree with the base run at 98.9 to 99.0 % of the cells, while the periods detected within the run agree at only 86.5 to 93.1 %, so within this horizon the orbit reached can depend on the start. Across the 19 prompts there is nonetheless a common structure (Figure 85): 48.3 % of the cells are chaotic for at least one prompt but only 3.0 % for half of them or more, and these hot spots lie at moderate steering of either sign in a band of temperature, where the mean fraction of chaotic cells per row peaks at 38 % near $\log_{10} T = 0.15$, against 0.8 % below $\log_{10} T = -0.5$. The three random-vector prompts move the band to colder temperatures: their mean profile peaks near $\log_{10} T = 0.03$, that of the text prompts near 0.16.

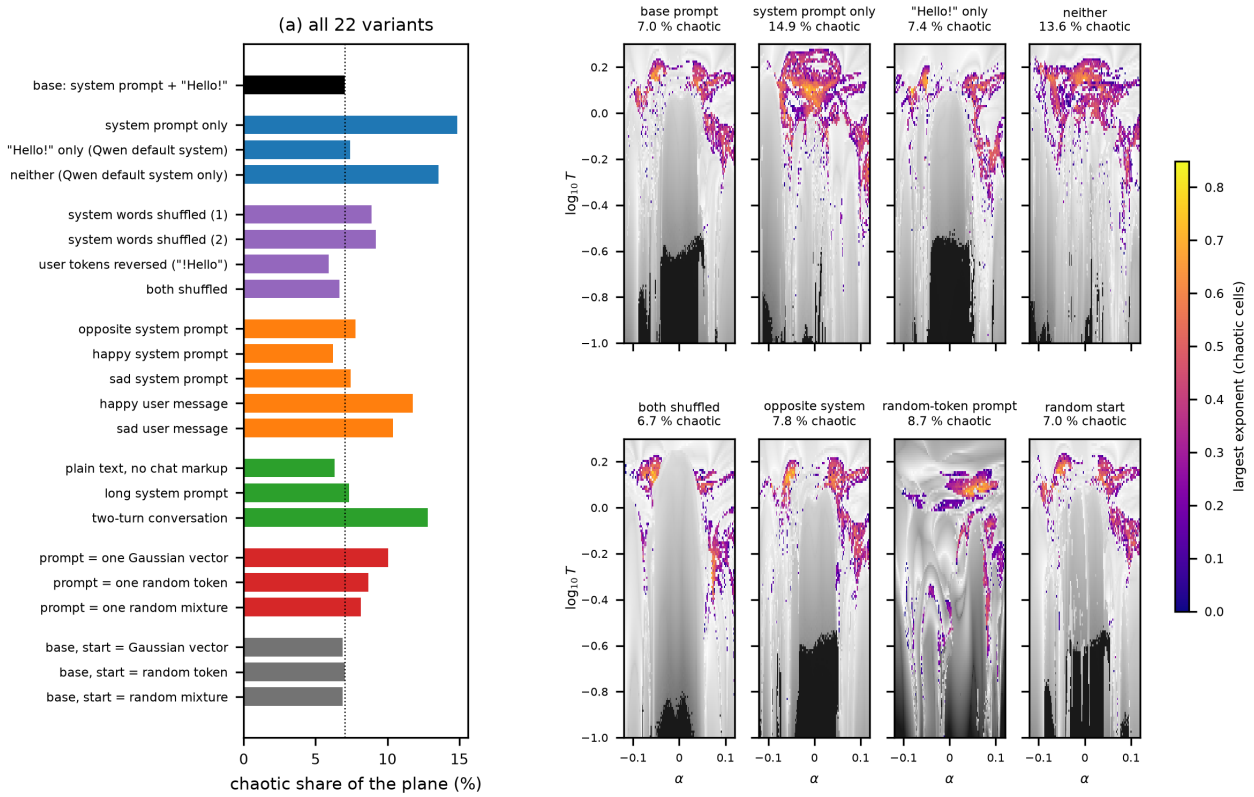


**Figure 84:** Every prompt we tested gives chaos, at places that depend on the prompt (Qwen2.5-0.5B-Instruct, philosophy direction at layer 12, float64; $128 \times 128$ cells over $\alpha \in [-0.12, 0.12]$ and $\log_{10} T \in [-1, 0.3]$). (a) The chaotic share of the plane for each of the 22 variants (19 prefixes, and the base prefix with the loop started from three random vectors), grouped by the kind of change; dotted: the base prompt (the system prompt "You are an AI talking with another AI…" and the user message "Hello!"). (b) Eight of the maps (colors: the largest exponent where it exceeds $10^{-3}$; gray: the other cells, darker where more contracting, among them a few unresolved nonperiodic cells). The exact texts and token identities of the prompts are in the project repository (`docs/prompt-variants`).

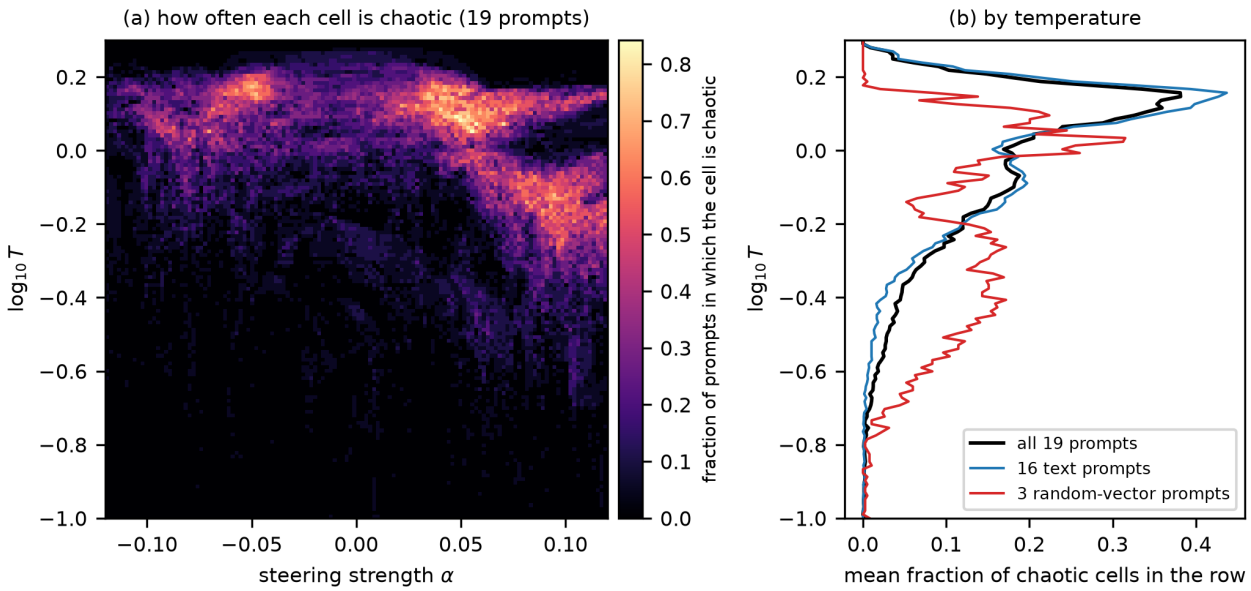


**Figure 85:** Where the chaos is found across prompts. (a) For each cell of the plane of Figure 84, the fraction of the 19 prompt variants (the random-start runs left out) in which it is chaotic. (b) The mean fraction per temperature row, for all prompts, the text prompts and the three random-vector prompts.

# K Limitations in detail

The detailed orbit studies cover one model family (Qwen2.5, 0.5B and 1.5B), with coarse maps and three float64 orbits at 7B; the two other families (OLMo-2 7B and Llama-3.1 8B) have maps, including $128^2$ refinements for Llama, but no continued orbits. The size comparison of Section 14 uses regular temperature grids that can miss narrow windows, a window that missed most of the larger models' chaos, and mostly one twin offset per label. The two-GPU runs of the 70B-class models computed their final normalization in float32 until we fixed it; their labels rest on offsets of $10^{-6}$ or more, and the cells we rechecked, the Qwen2.5-72B jump window and steered candidates in float64 throughout and samples of the Llama maps at three offsets, behave as stated, but the rest of those maps were not recomputed. Neither were the four coarse lines of the frozen 72B test; after the fix we computed only fine lines through their entropy jumps, one of which passes through their single chaotic temperature. The maps use one prompt, apart from the 22 prompt variants of the 0.5B standard plane (paragraph "The prompt" above; Section 14 adds ten for Qwen2.5-7B and -14B, and four for Qwen2.5-72B, its base model, and OLMo-2-7B and -32B), and steering uses contrastive vectors, checked against norm-matched random and sparse-autoencoder directions in two models. The soft-token loop is one inference scheme: Appendix G extends it to memories of up to sixteen soft tokens and to the growing context of Soft Thinking, but sampled decoding of discrete tokens is a different system. The evidence consists of numerical validation, cross-checks and prospectively frozen passage tests (including failed all-row criteria), with computer-assisted proofs for only three orbits at two parameter points (the period-8 orbit and a coexisting period-2 and period-3 pair). Chaos labels are finite-horizon estimates (300 measured steps after 300 to 500 transient steps), and the chaotic cells are numerically validated (twin exponents agree with automatic-differentiation tangents, across precisions and horizons) but not yet established by a computer-assisted proof. A computer-assisted proof of chaos, such as a horseshoe verified by covering relations, would need enclosures of the map over boxes many orders of magnitude larger than the period-8 proof's (radius $2^{-640}$). That proof is unaffected, but its ball arithmetic does not scale to large boxes: in a separate

test, a box of radius $2^{-80}$ already gave enclosures too wide to show that an RMS normalization at layer 3 divides by a positive number (the enclosures overestimate through the layers), so a proof of chaos needs other verified methods. A horizon check retested random cells of two float64 maps (Figures 1 and 10) with 1000 transient and 2000 measured steps at two twin offsets: 86 and 92 of 96 cells labeled chaotic stayed chaotic (all but one of the rest settled on periodic orbits), all 96 periodic cells in each map stayed periodic, and 29 and 27 of 32 cells with neither label settled on periodic orbits (18 and 20 of them with periods up to 32, the maps' maximum, the others with periods up to 64). For the cells that stayed chaotic, the map's 300-step exponent differs from the 2000-step exponent by a median of 0.020 and 0.030 (90th percentiles 0.064 and 0.096, maxima 0.23 and 0.30), and the 2000-step exponents at offsets $10^{-6}$ and $10^{-9}$ agree within $3 \times 10^{-3}$. The chaotic counts do not hinge on the threshold: raising it from $10^{-3}$ to 0.01, 0.02 or 0.05 leaves 77,646, 76,761 or 73,437 of the 78,868 chaotic cells of Figure 1. Near the accumulation of a cascade the labels are less reliable, because orbits there converge slowly or wander chaotically before they settle (transient chaos [40, 132]): on the hostile line of Figure 26 (left), 135 of the 235 cells labeled chaotic from 400 measured steps stayed chaotic and 91 were periodic. The Feigenbaum ratios are finite-order values that rise toward $\delta$ (the last is within 1 %); the limit itself is not computed. All orbit, bifurcation and chaos results concern the soft-token map, not sampled generation with a growing context. With sampling, the bridge of Appendix G tests only whether the bottleneck's laminar phases survive the noise; its other tests are deterministic (greedy decoding, longer fed-back memories and Soft Thinking's growing context).

## L Evidence and reproducibility

We grade claims on an evidence ladder. Rung 1 means numerically validated (tolerances, residuals, convergence, precision varied); rung 2, cross-checked by an independent estimate, implementation or hardware; rung 3, a computer-assisted proof.

**Search scale.** The soft-token results come from an exploratory search. An initial census of the raw data at 00:19 UTC on 14 October 2026 counted 34 distinct maps (987 308 cells, 27 maps in float64) in six models, each with one prompt and one of three steering directions or none, plus one partial map. Of these, 29 maps and the partial one appear here; the five omitted are early discovery or side maps. Later additions are not in that count: the steering-control maps of Appendix J, the mixture-of-experts maps, and the sweeps, lines and maps of the models of Section 14 and Appendix I. The labeled maps contain about 2600 periodic families of at least six cells, counted per map. We singled out about 26 windows or families for float64 work: 20 are reported in detail, 2 only as map features and 4 not at all (an orbit whose continuation was abandoned, a cell that proved aperiodic, a band whose float32 orbit did not converge and a pilot that found no cusp within a bounded search). Of 54 Newton orbit attempts, 7 failed. All nine tangent reversals on continued fold curves (seven found by 14 October, and two on traces of a period-4 fold curve continued on 15 October) are numerically located cusps; the two reversals of a continued flip curve are smooth turns. The four reversals on the two fold curves of the period-5 window found on 15 October (below) are located cusps as well. Four further reversals found on 18 October, one on the lower-left leg's own fold curve, one on the extension of the window's second fold curve and two on a partial trace of a fold curve of the window at $\log_{10} T = -0.105$, are flagged by the continuation but not located. Two of the five regions we flagged as shrimp candidates are reported as shrimp-like. On 15 October, the turning-point search of the two-block planes (not counted in Table 25) led to two more windows: a period-5 window, reported with its continued orbit and its continued fold and flip curves

in Appendix F, and a period-6 window that was mapped but not continued. One further language model (Ouro-1.4B) was explored and is not reported; its apparent chaos was a long transient. Every window was chosen after the maps were inspected. In the census of Table 25, only the passage forecasts, the cusp-unfolding offsets and Huginn's relaxation test were fixed before the computations that test them; tests frozen later, up to the fixed-shape control of 18 October, are identified as such where they are reported.

| | explored | reported | note |
|---|---|---|---|
| Soft-token maps (distinct) | 34 | 29 | plus one partial map, reported |
| cells | 987 308 | 893 868 | omitted: 5 discovery or side maps[a] |
| float32 maps | 7 | 4 | |
| Models with maps | 6 | 6 | one prompt; 3 directions and $\alpha = 0$ |
| Periodic families ($\geq 6$ cells) | $\approx 2600$ | – | counted per labeled map |
| Windows given float64 work | $\approx 26$ | 20 (+2) | +2: map features only |
| Newton orbit attempts | 54 | – | 7 failed |
| Tangent reversals on fold curves | 9 | 9 | all located cusps (2 found on 15 Oct.) |
| Unfolding offsets, frozen | 12 | 12 | counts 12/12, stability 11/12 |
| Shrimp-candidate regions | 5 | 2 | reported as shrimp-like |
| Tests fixed before outcomes | 6 | 4 | 2 all-row criteria failed by one row |
| Language models loaded | 8 | 7 | Ouro-1.4B not reported |

**Table 25:** Search scale on 14 October 2026, before the steering-control maps; the reversal row includes the two cusps located on 15 October (Huginn's frozen test counted once; of the two tests not reported here, one belongs to the separately reported sampled-dialogue study and one, a cusp pilot in a second checkpoint, is the unreported bounded search). [a]The five omitted maps are a high-temperature family map, a 256-cell scan and three float64 zooms. The census saved only its totals; this list was reconstructed on 17 October from the raw maps as the set whose omission reproduces both totals (`docs/receipts/paper-numbers-20261017.json`).

- Rung 3: the period-8 stripe orbit of Table 6. At $\alpha = 0.071674$ and $\log_{10} T = -0.115$, read as exact binary64 rationals (the temperature is the real number $\exp(\ln 10 \cdot \log_{10} T)$ for that exact dyadic $\log_{10} T$), the expected-embedding map of the stored Qwen2.5-0.5B-Instruct checkpoint (all 24 layers, the full 151 936-token readout, the fixed 37-token prefix, steering after zero-based block 12) has a primitive period-8 orbit, which is the unique multiple-shooting root in a product of eight boxes of coordinate radius $2^{-640}$ around refined centers, and the orbit is locally attracting. Ball arithmetic (Arb [133]) encloses the map and its Jacobian over each box ($8 \times 896$ directions); a Krawczyk-type inclusion [134–136] for the preconditioned shooting system gives existence and uniqueness, separation of the first point from the points one, two and four steps later gives the primitive period, and a norm bound on powers of the enclosed monodromy gives attraction. The map is the real-number map of the stored constants, read as exact dyadic rationals: rotary angles, exponentials and square roots are real functions enclosed by the balls, not floating-point tables. An independent audit in exact rational arithmetic rechecked the saved witnesses (the scalar inequalities, the primitive-period separations and the row norms of the saved monodromy powers); it did not recompute the enclosures of the model or the dense matrix products, which rest on one execution. The proof trusts the Python, FLINT and Arb stack and the stored weights. It does not exclude other period-8 points in the first box, and it says nothing about the window's boundaries or global organization. The record (`certificates/llm-p8-certificate-final-001.json`) pins the SHA-256 hashes of

the checkpoint, its configuration and the steering vector, and lists the 37 prefix token IDs.

- Rung 3: coexistence. At $\alpha = 0.06468$ and $\log_{10} T = -0.148$, inside the strip of the crescent where the 2-cycle and the 3-cycle both exist (Section 12), the same map, with the same reading of parameters and constants, has a primitive period-2 orbit and a primitive period-3 orbit. Each is the unique multiple-shooting root in its product of boxes of coordinate radius $2^{-640}$ around refined centers, and each is locally attracting; different primitive periods make them distinct orbits. The construction is that of the period-8 proof. The point enclosures are computed at 2048 bits and the derivative enclosures at 1024 bits, in 70 pieces that cover every phase and all 896 directions (28 for the 2-cycle, 42 for the 3-cycle; 37.5 worker-hours on rented CPUs). Krawczyk-type inclusion gives existence and local uniqueness, and separation from the proper divisors gives the primitive periods. For attraction, the unweighted bounds on the first and second powers of the enclosed monodromy failed the sufficient condition: the monodromy is strongly nonnormal, so a single norm overstates its growth. These failed attempts are kept in the record, and the fourth and eighth powers pass. Their induced infinity-norm bounds, rounded up, are $7.51 \times 10^{-4}$ and $1.9 \times 10^{-8}$ for the 2-cycle and 0.342 and $1.091 \times 10^{-3}$ for the 3-cycle; the numerical leading multiplier moduli are 0.0476 and 0.239. An independent exact-rational audit rechecked every saved row norm (1 605 632 entries per orbit) and the scalar and separation witnesses. A separate check certifies the token loops: over every box of both orbits, the most probable next token leads all 151 936 tokens by a positive margin, so the 2-cycle writes " is it" and the 3-cycle a blank line, "The" and " existence" (`codex/coexistence-task33/token-labels-release.json`); the same check gives the period-8 orbit's loop " is there is a is a. This". These are the readouts of the feedback orbits, not sentences generated autoregressively. A further certificate gives explicit basin neighborhoods: every state in the closed infinity-norm ball of radius $2^{-681}$ about the 2-cycle's frozen center at phase 0 converges to the 2-cycle, and every state within $2^{-700}$ of the 3-cycle's center converges to the 3-cycle (`codex/coexistence-task33/inner-basin-release.json`). These neighborhoods are tiny. The proofs say nothing about which orbit a start outside them reaches, including the fixed start of the maps, nor about the trapping of the whole box or the window's global organization. The record is `codex/coexistence-task33/pair-certificate-release.json`.

- Rung 2: the 2-cycle's fold and its normal form. An independent reimplementation of the forward map and solver recovers $\alpha_c$, $a$ and $b$ (to $6 \times 10^{-15}$, $3 \times 10^{-12}$ and $2 \times 10^{-6}$ relatively), and $ab$ also follows from the stable-branch multipliers. The same reimplementation reproduces all 18 fixed-entrance counts of the controlled passage runs exactly (Table 8 lists 12 of them).

- Prospectively frozen: the passage forecasts at two new folds (Table 10); 23 of 24 within one iterate (16 of the 17 longer than five iterates), and the all-row criterion failed by one row. A second frozen test at two more folds (Table 11): 18 of 24 within one iterate of the primary forecast; it failed at the entrance passages of a period-6 fold, short by 3.1 to 5.2 %.

- Rung 2 as well: the period-2 and period-8 orbits of Table 6 (independent implementation), and the cascade's first four flip parameters (CPU and H100, agreement $4 \times 10^{-15}$).

- Rung 2 as well: the hostile 2-cycle fold and its normal form, reproduced by an independent float64 forward map with nested automatic differentiation (location to $6 \times 10^{-10}$, $ab$ to 8 parts per million); its controlled passages were also checked independently, with the frozen all-six criterion failing by one row.

- Rung 1: the other orbits, the curves, the thirteen located cusps, the superstable parameters, the 1.5B flips, the hostile windows' edges, the spiral region's period-7 body and the cascade inside it, the three 7B orbits, and Huginn's float32 spectral estimates.

- Prospectively frozen, not independently reproduced: the scaling predictions P1–P3, the prompt-blocked size tests in Qwen2.5 (7B and 14B; 72B; 72B base against Instruct) and OLMo-2, and the loop-free predictor test of Section 14 and Appendix I, all scored by code pushed before the data, together with the three-offset plateau tests of the 70B-class maps and the float64 recheck of the Qwen2.5-72B cells with automatic-differentiation tangent exponents. These are float64 computations at rung 1; no independent implementation has rechecked them.

- Prospectively frozen on 15 October: the answer-level reproducibility test in Qwen2.5-0.5B (positive), whose saved rows and statistics an independent implementation reproduced (the generation itself was not rerun); its 7B extension (positive) and the behavior test (null on its primary question; no edge optimum), not independently reproduced. All are reported in Section 6, the behavior test in detail in Appendix D, and each was scored by code pushed before the data (`docs/repro-task-test.md`, `docs/bpc-test.md`).

- Prospectively frozen on 18 October, not independently reproduced: the fixed-shape control and dose test in Qwen2.5-0.5B (448 cells; `docs/fs-design.md`; Section 6). With unchanged matrix shapes the paired runs are bitwise identical in every cell, a changed shape reproduces the earlier comparison, and in the chaotic cells the primary dose criterion holds at every dose from $10^{-15}$ to $10^{-7}$. Of the secondary criteria, the slope passed and the periodic one failed: from $d = 10^{-9}$ on, more than 10 % of the periodic cells separated.

- Independently reproduced from saved data (15 October): every summary field of the 0.5B batch-layout comparison (448 cells, four comparisons) and the gain-split, logit-bias and crossover summaries of Section 3 (5353, 6837 and 24 cells); the coefficients and offset rows of the flip normal-form test (Table 15); the 1.5B and 7B fold-law scores under both period selectors (all 2700 cells); and the scalar conditions of the nine located cusps, matched one-to-one to the tangent reversals of the seven continued fold curves. This reproduces the statistics and saved scalars, not the model runs, derivatives or eigenvectors. The within-prompt steered test (null) used an analysis fixed and pushed before its data, without a separate frozen design document.

- Prospectively frozen and independently replayed: Huginn's relaxation test on held-out data, confirmed in both parts; an independent implementation reproduced both from the saved rows and spectra (GSM8K part exactly, item-level part to $10^{-12}$) (Section 15).

**Hardware.** Float64 GPU computations ran on rented NVIDIA H100 (NVL, PCIe and 80 GB HBM3), H200, H200 NVL and A100 80 GB (SXM4 and PCIe) GPUs, one GPU per run except for the 70B-class models, whose layers were spread over two; the float32 frames of the rotation video ran on RTX 4090 GPUs; the first reset test of Section 6 ran on a local NVIDIA RTX 2000 Ada workstation GPU and its replication on an H100 NVL; cross-checks, the interval proof, the second prospective passage test, the coexistence runs and the near-nilpotent searches ran on CPUs. The manifest `docs/manifests/runpod-runs.json` records for each run the GPU type, the code commit, the job and its arguments, the wall time and the exit status, and the available hashes of the uploaded code and input archives and of the retrieved results, with absent fields left explicit; per-run receipts and accepted provenance limitations are kept with it. Regenerated at 02:11 UTC on 16

October 2026, it covers the runs up to that time: it lists 438 runs with retrieved results (code and input-archive hashes for 330, result-archive hashes for 412) and 21 pods that ended without results. Later runs are recorded with their receipts in the research log. GPU types round float64 reductions differently, so quantities used across runs were checked across hardware where it mattered (for example, flip parameters agree between CPU and H100 to $4 \times 10^{-15}$). Code: `tools/explore_llm_soft_loop.py`, `tools/bifurcation_curves.py`, `tools/llm_feigenbaum.py`, `tools/explore_latent_loop.py`, `tools/cusp_check.py`, `tools/huginn_relax_eval.py`, `tools/huginn_arc_analysis.py`, `tools/steer_gain.py`, `tools/crossover.py`, `tools/repro_noise.py`, `tools/repro_task.py`, `tools/repro_summary.py`, `tools/bpc_analyze.py`, `tools/turning_scan.py`. Raw-data hash receipts: `evidence/llm-dynamics-data-receipts.json` (to 12 October), the per-run receipts in the research log, and the verified snapshot manifests in `docs/backups/`; independent cross-check and audit receipts are under `codex/` (`crosscheck`, `confirm-fold`, `hostile-fold-crosscheck`, `huginn-design-review`, `huginn-independent-replay`, `paper-review`).

[**Planned:** public code and data release at submission.]